



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





VRLA Rechargeable Battery

BC18-12



FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- Absorbent Glass Mat technology for efficient gas recombination

APPLICATION

- UPS
- Fishing Lights
- Emergency Lights
- Video Camcorders(VCR)



SPECIFICATIONS

Nominal Voltage	12V
Nominal Capacity	18.00 Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	5620g(12.39lbs.)
Terminals	B1 (Fitting M5 bolt & nut) , T2 and I1 are optional
Internal Resistance	≤ 16mΩ(Fully Charged)
Max. Discharge Current	270 A (5 sec.)
Max. Charge Current	5.4 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL 94-HB) BC18-12 Optional: Flame Retardant ABS(UL 94-V0) BC18-12FR





- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

- **Length**
181±1.5 (7.13±0.06)
- **Width**
76±1.5 (2.99±0.06)
- **Container Height**
166±1.5 (6.54±0.06)
- **Total Height**
166±1.5 (6.54±0.06)

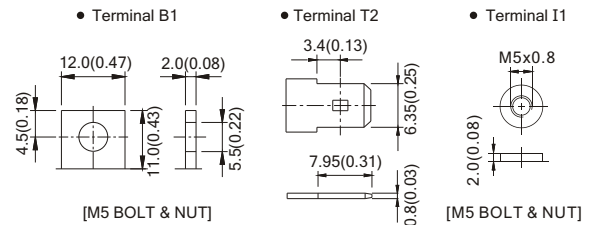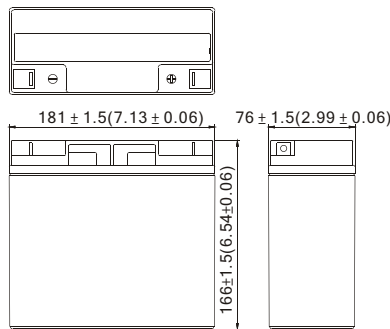

Terminal Hardware Initial Torque: B1(2.5Nm±5%),I1(4.0Nm±5%)

Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	651	479	384	229	131.0	52.5	36.2	20.21	10.64
1.75V	753	519	401	237	134.9	53.5	36.7	20.52	10.80
1.70V	800	538	414	242	137.3	54.0	37.0	20.63	10.85
1.65V	836	551	424	246	139.0	54.4	37.1	20.69	10.88
1.60V	864	561	432	249	140.4	54.7	37.2	20.69	10.88

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	58.63	42.17	33.38	19.36	11.01	4.372	3.014	1.685	0.886
1.75V	69.11	45.69	34.92	20.10	11.34	4.460	3.060	1.710	0.900
1.70V	73.43	47.33	36.00	20.55	11.54	4.500	3.077	1.718	0.904
1.65V	76.72	48.46	36.83	20.84	11.68	4.532	3.088	1.724	0.907
1.60V	79.26	49.44	37.57	21.05	11.80	4.558	3.097	1.724	0.907

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

For operation, please refer to the instruction from technical manual.

A/0 REV. Mar. 2014

Powered by B.B. Battery Co., Ltd.