



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# XP™ 2.7V 10F ULTRACAPACITOR CELL

## FEATURES AND BENEFITS

- Enhanced performance under adverse environmental conditions
- Patented improvements both in structure and in sealing
- Long lifetimes with up to 500,000 duty cycles\*
- Compliant with UL, RoHS and REACH requirements

## TYPICAL APPLICATIONS

- Actuators
- Emergency Lighting
- Telematics
- Automotive
- Security Equipment
- Backup System
- Smoke Detectors
- Advanced Metering



## PRODUCT SPECIFICATIONS & CHARACTERISTICS

BCAP0010 P270 X01  
ESHSR-0010C0-002R7UC

### ELECTRICAL

Rated Voltage, $V_R$	2.7 VDC
Surge Voltage <sup>1</sup>	2.85 VDC
Rated Capacitance, $C^3$	10 F
Min. / Max. Capacitance, Initial	9 F / 12 F
Typical Capacitance, Initial <sup>2,3</sup>	10.6 F
Rated (Max.) $ESR_{DC}$ , Initial <sup>3</sup>	30 m $\Omega$
Typical $ESR_{DC}$ , Initial <sup>2,3</sup>	25 m $\Omega$
Typical $ESR_{DC}$ , Initial, 5 sec <sup>2,3</sup>	46 m $\Omega$
Maximum Leakage Current <sup>4</sup>	23 $\mu$ A
Maximum Peak Current, Non-repetitive <sup>5</sup>	10 A

### PHYSICAL

Nominal Mass	3.2 g
--------------	-------

### POWER & ENERGY

Operating Temp. Range	Standard (-40°C to 65°C) at 2.7 V	Extended (-40°C to 85°C) at 2.3 V
Maximum Stored Energy, $E_{max}$ <sup>6,9</sup>	10.1 mWh	7.3 mWh
Gravimetric Specific Energy <sup>6</sup>	3.1 Wh/kg	2.2 Wh/kg
Usable Specific Power <sup>6</sup>	9.1 kW/kg	6.6 kW/kg
Impedance Match Specific Power <sup>6</sup>	18.9 kW/kg	13.7 kW/kg

### THERMAL

Typical Thermal Resistance ( $R_{th}$ , Housing) <sup>8</sup>	42°C/W
Typical Thermal Capacitance ( $C_{th}$ )	2.7 J/°C
Usable Continuous Current (BOL) ( $\Delta T = 15$ °C) <sup>8,10</sup>	3.4 A
Usable Continuous Current (BOL) ( $\Delta T = 40$ °C) <sup>8,10</sup>	5.6 A

### LIFE\*

Projected DC Life at Room Temperature (At rated voltage and 25°C, EOL <sup>10</sup> )	10 years
DC Life at High Temperature (At rated voltage and 65°C, EOL <sup>10</sup> )	1,500 hours
DC Life at De-rated Voltage & Higher Temperature (At 2.3V and 85°C, EOL <sup>10</sup> )	1,500 hours
Projected Cycle Life at Room Temperature <sup>7</sup> (Constant current charge-discharge from $V_R$ to $1/2V_R$ at 25°C, EOL <sup>10</sup> )	500,000 cycles
Biased Humidity Life (At rated voltage, 60°C, and 90% RH)	2,500 hours
Shelf Life (Stored uncharged at 25°C)	4 years


### SAFETY

Certifications	RoHS, REACH, UL 810A
----------------	----------------------

\*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.

# Datasheet: XP™ 2.7V 10F ULTRACAPACITOR CELL

1. Surge Voltage  
Absolute maximum voltage, non-repetitive. Duration not to exceed 1 second.
2. "Typical" values represent mean values of production sample.
3. Rated Capacitance & ESR<sub>DC</sub> (measure method)
  - Capacitance: Constant current charge (10 mA/F) to V<sub>R</sub>, 5 min hold at V<sub>R</sub>, constant current discharge 10 mA/F to 0.1V.  
e.g. in case of 2.7V 10F cell, 10 \* 10 = 100 mA
  - ESR<sub>DC</sub>: Constant current charge (10 mA/F) to V<sub>R</sub>, 5 min hold at V<sub>R</sub>, constant current discharge (40 \* C \* V<sub>R</sub>[mA]) to 0.1 V.  
e.g. in case of 2.7V 10F cell, charge with 10 \* 10 = 100 mA and discharge with 40 \* 10 \* 2.7 = 1,080 mA

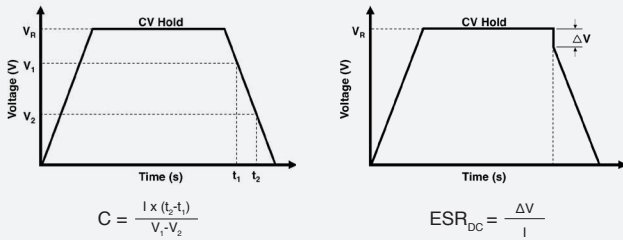

where C is the capacitance (F);  
I is the absolute value of the discharge current (A);  
V<sub>R</sub> is the rated voltage (V);  
V<sub>1</sub> is the measurement start voltage, 0.8xV<sub>R</sub> (V);  
V<sub>2</sub> is the measurement end voltage, 0.4xV<sub>R</sub> (V);  
t<sub>1</sub> is the time from start of discharge to reach V<sub>1</sub> (s);  
t<sub>2</sub> is the time from start of discharge to reach V<sub>2</sub> (s);  
ESR<sub>DC</sub> is the DC-ESR (Ω);  
ΔV is the voltage drop during first 10ms of discharge (V).

Typical ESR<sub>DC</sub>, Initial, 5 sec tested per Maxwell Application Note, "Test Procedures for Capacitance, ESR, Leakage Current and Self-Discharge Characterizations of Ultracapacitors" available at [www.maxwell.com](http://www.maxwell.com).


4. Maximum Leakage Current
  - Current measured after 72 hrs at rated voltage and 25°C. Initial leakage current can be higher.
  - If applicable, module leakage current is the sum of cell and balancing circuit leakage currents.
5. Maximum Peak Current
  - Current needed to discharge cell/module from rated voltage to half-rated voltage in 1 second.

$$I = \frac{\frac{1}{2}V_R}{\Delta t / C + ESR_{DC}}$$

where Δt is the discharge time (sec); Δt = 1 sec in this case.

- The stated maximum peak current should not be used in normal operation and is only provided as a reference value.
6. Energy & Power (Based on IEC 62391-2)
    - Maximum Stored Energy, E<sub>max</sub>(Wh) =  $\frac{\frac{1}{2}CV_R^2}{3,600}$
    - Gravimetric Specific Energy (Wh/kg) =  $\frac{E_{max}}{mass}$
    - Usable Specific Power (W/kg) =  $\frac{0.12V_R^2}{ESR_{DC} \times mass}$
    - Impedance Match Specific Power (W/kg) =  $\frac{0.25V_R^2}{ESR_{DC} \times mass}$
    - Presented Power and Energy values are calculated based on Rated Capacitance & Rated (Max.) ESR<sub>DC</sub>, Initial values.
  7. Cycle Life Test Profile  
Cycle life varies depending upon application-specific characteristics. Actual results will vary.
  8. Temperature Rise at Constant Current
    - $\Delta T = I_{RMS}^2 \times ESR_{DC} \times R_{th}$
    - where ΔT: Temperature rise over ambient (°C)  
I<sub>RMS</sub>: Maximum continuous or RMS current (A)  
R<sub>th</sub>: Thermal resistance, cell to ambient (°C/W)  
ESR<sub>DC</sub>: Rated (Max.) ESR<sub>DC</sub> (Ω).  
(Note: Design should consider EOL ESR<sub>DC</sub> for application temperature rise evaluation.)
  9. Per United Nations material classification UN3499, all Maxwell ultracapacitors have less than 10 Wh capacity to meet the requirements of Special Provisions 361. Both individual ultracapacitors and modules composed of those ultracapacitors shipped by Maxwell can be transported without being treated as dangerous goods (hazardous materials) under transportation regulations.
  10. BOL: Beginning of Life, rated initial product performance  
EOL: End of Life criteria.
    - Capacitance: 80% of min. BOL rating
    - ESR<sub>DC</sub>: 2x max. BOL rating

## BCAP0010 P270 X01

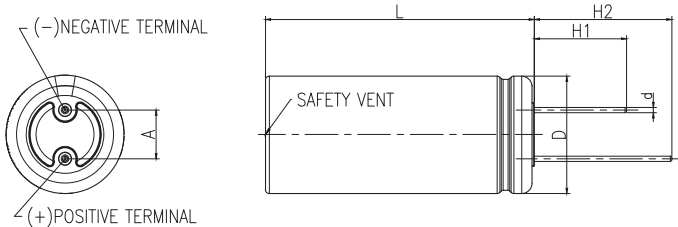

Part Description	Dimensions (mm)					
	L (±1.0)	D (+0.5)	d (±0.05)	H1 (min.)	H2 (min.)	A (±0.5)
BCAP0010 P270 X01	30.5	10.0	0.60	15.0	19.0	5.0

When ordering, please reference the Maxwell Model Number below.

**Maxwell Model Number:** BCAP0010 P270 X01  
**Maxwell Part Number:** 133517  
**Alternate Model Number:** ESHSR-0010C0-002R7UC

The information in this document is correct at time of printing and is subject to change without notice. Images are not to scale.

**Maxwell Technologies, Inc.**  
**Global Headquarters**  
 3888 Calle Fortunada  
 San Diego, CA 92123  
 USA  
 Tel: +1 (858) 503-3300  
 Fax: +1 (858) 503-3301

**Maxwell Technologies SA**  
 Route de Montena 65  
 CH-1728 Rossens  
 Switzerland  
 Tel: +41 (0)26 411 85 00  
 Fax: +41 (0)26 411 85 05

**Maxwell Technologies, GmbH**  
 Leopoldstrasse 244  
 80807 Munich  
 Germany  
 Tel: +49 (0)89 4161403 0  
 Fax: +49 (0)89 4161403 99

**Maxwell Technologies Shanghai Trading Co., Ltd.**  
 Room 1005, 1006, and 1007  
 No. 1898, Gonghexin Road,  
 Jin An District, Shanghai  
 2000072, P.R. China  
 Tel: +86 21 3852 4000  
 Fax: +82 21 3852 4099

**Nesscap Co., Ltd.**  
 17, Dongtangiheung-ro  
 681 Beon-gil, Giheung-gu,  
 Yongin-si, Gyeonggi-do  
 17102  
 Republic of Korea  
 Tel: +82 31 289 0721  
 Fax: +82 31 286 6767

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, NESSCAP, XP, BOOSTCAP, D CELL, CONDIS and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc., and/or its affiliates, and may not be copied, imitated or used, in whole or in part, without the prior written permission Maxwell Technologies, Inc. All contents copyright © 2018 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.

