



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## FEATURES AND BENEFITS

- Highest voltage and power
- DuraBlue™ Shock and Vibration Technology
- Up to 1,000,000 duty cycles or 10 year DC life\*
- 16 kW/kg of Specific Power
- 3.75 Wh of Stored Energy

## TYPICAL APPLICATIONS

- High shock and vibration environments
- Automotive subsystems
- Wind turbine pitch control
- Hybrid vehicles
- Rail
- Heavy industrial equipment
- UPS & telecom systems



## PRODUCT SPECIFICATIONS

## ELECTRICAL BCAP3000

Rated Voltage	3.00 V
Minimum Capacitance <sup>1</sup> , initial, rated value	3,000 F
Maximum ESR <sub>DC</sub> <sup>1</sup> , initial, rated value	0.27 mΩ

## POWER &amp; ENERGY

Usable Specific Power, P <sub>d</sub> <sup>2</sup>	7.7 kW/kg
Impedance Match Specific Power, P <sub>max</sub> <sup>3</sup>	16 kW/kg
Specific Energy, E <sub>max</sub> <sup>4</sup>	7.2 Wh/kg
Stored Energy, E <sub>stored</sub> <sup>5</sup>	3.75 Wh

## SHOCK &amp; VIBRATION

Vibration Specification	ISO 16750-3, Tables 12 & 14
Shock Specification	SAE J2464, IEC 60068-2-27, -29

## SAFETY

Short Circuit Current, typical (Current possible with short circuit from rated voltage. Do not use as an operating current.)	11,000 A
Certifications	RoHS, REACH

## THERMAL

Thermal Resistance (R <sub>ca</sub> , Case to Ambient), typical	3.2°C/W
Thermal Capacitance (C <sub>th</sub> ), typical	600 J/°C
Maximum Continuous Current (ΔT = 15°C) <sup>6</sup>	130 A <sub>RMS</sub>
Maximum Continuous Current (ΔT = 40°C) <sup>6</sup>	210 A <sub>RMS</sub>

## TYPICAL CHARACTERISTICS

## TEMPERATURE BCAP3000

Operating temperature range (Cell case temperature)	
Minimum	-40°C
Maximum	65°C

## ELECTRICAL

Leakage Current at 25°C, maximum <sup>7</sup>	12 mA
Absolute Maximum Voltage <sup>8</sup>	3.25 V
Absolute Maximum Current	2,200 A

## LIFE

DC Life at High Temperature <sup>1</sup> (held continuously at Rated Voltage & Maximum Operating Temperature)	1,500 hours
--	-------------

Capacitance Change (% decrease from rated value)	20%
---	-----

ESR Change (% increase from rated value)	100%
---	------

Projected DC Life at 25°C <sup>1</sup> (held continuously at Rated Voltage)	10 years
--	----------

Capacitance Change (% decrease from rated value)	20%
---	-----

ESR Change (% increase from rated value)	100%
---	------

Projected Cycle Life at 25°C <sup>1,9,10</sup>	1,000,000 cycles
--	------------------

Capacitance Change (% decrease from rated value)	20%
---	-----

ESR Change (% increase from rated value)	100%
---	------

Shelf Life (Stored uncharged at 25±10°C)	4 years
---	---------


## PHYSICAL

Mass, typical	520 g
Threads	M12 X 1.75 <sup>11</sup>

\*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.



BCAP3000 P300 K04

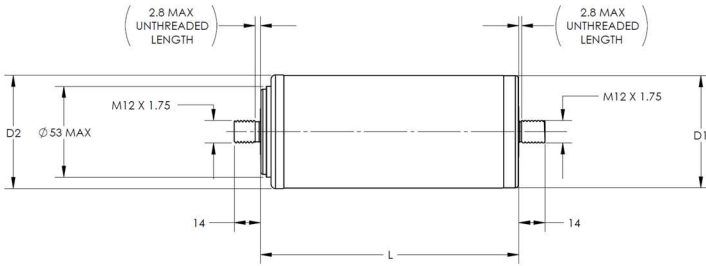

Part Description	Dimensions (mm)			Package Quantity
	L (±0.3mm)	D1 (±0.2mm)	D2 (±0.7mm)	
BCAP3000 P300 K04	138	60.4	60.7	15

NOTES

1. Capacitance and  $ESR_{DC}$  measured using 100 A test current at 25°C per document number 1007239 available at maxwell.com.
2. Per IEC 62391-2,  $P_d = \frac{0.12V^2}{ESR_{DC} \times \text{mass}}$
3.  $P_{max} = \frac{V^2}{4 \times ESR_{DC} \times \text{mass}}$
4.  $E_{max} = \frac{\frac{1}{2} CV^2}{3,600 \times \text{mass}}$
5.  $E_{stored} = \frac{\frac{1}{2} CV^2}{3,600}$
6.  $\Delta T = I_{RMS}^2 \times ESR \times R_{ca}$
7. After 72 hours at rated voltage. Initial leakage current can be higher.
8. Absolute maximum voltage, non-repeated. Not to exceed 1 second.
9. Cycle between 3.0V and 1.5V using 100 A constant current with 5 second rest at 3.0V and 15 second rest at 1.5V.
10. Cycle life varies depending upon application-specific characteristics. Actual results will vary.
11. Maximum Torque is 14 Nm.

MOUNTING RECOMMENDATIONS

Do not reverse polarity.

MARKINGS

Products are marked with the following information: Rated capacitance, rated voltage, product number, name of manufacturer, positive terminal, warning marking, serial number.

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application. All products featured on this datasheet are covered by the following U.S. patents and their respective foreign counterparts: 6643119, 7295423, 7342770, 7352558, 7384433, 7440258, 7492571, 7508651, 7580243, 7791860, 7791861, 7859826, 7883553, 7935155, 8072734, 8098481, 8279580.



**Maxwell Technologies, Inc.**  
**Global Headquarters**  
 3888 Calle Fortunada  
 San Diego, CA 92123  
 USA  
 Tel: +1 (858) 503-3300  
 Fax: +1 (858) 503-3301



**Maxwell Technologies SA**  
 Route de Montena 65  
 CH-1 728 Rossens  
 Switzerland  
 Tel: +41 (0)26 411 85 00  
 Fax: +41 (0)26 411 85 05



**Maxwell Technologies, GmbH**  
 Leopoldstrasse 244  
 80807 München  
 Germany  
 Tel: +49 (0)89 / 4161403 0  
 Fax: +49 (0)89 / 4161403 99



**Maxwell Technologies, Inc.**  
**Shanghai Trading Co. Ltd**  
 Unit A2BC, 12th Floor  
 Huarun Times Square  
 500 Zhangyang Road, Pudong  
 Shanghai, 200122, P.R. China  
 Phone: +86 21 3852 4000  
 Fax: +86 21 3852 4099



**Maxwell Technologies Korea Co., Ltd**  
 Room 1524, D-Cube City  
 Office Tower, 15F #662  
 Gyeongin-Ro, Guro-Gu,  
 Seoul, Korea, 152-706  
 Phone: +82 10 4518 9829

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, BOOSTCAP, D CELL and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc. and may not be copied, imitated or used, in whole or in part, without the prior written permission from Maxwell Technologies, Inc. All contents copyright © 2016 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.

