



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





BCM5715S PRODUCT Brief



DUAL-PORT GIGABIT ETHERNET CONTROLLER WITH A PCI EXPRESS® HOST INTERFACE

FEATURES

- Dual integrated 1.25 Gbps SerDes interface
- PCI Express® x4 Host Interface
- Dual 1000BASE-X Media Access Controllers (MACs)
- MACs
 - Integrated high-speed RISC cores
 - 5 KB receive and 22 KB transmit buffers
 - CPU task offload features (TCP, IP, UDP checksum, and Microsoft® Large Send Offload)
- TCP segmentation, IP fragmentation, and reassembly
- Robust manageability
 - PXE 2.0 remote boot
 - Universal Management Port (UMP) interface for high-speed system management traffic
 - IPMI-compliant server management interface
 - Out-of-Box Wake-on-LAN (OoB WOL)
 - Statistic gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB for (802.3x, clause 30)
 - Comprehensive diagnostic and configuration software suite
 - SMBus 2.0 controller
- Power management, ACPI 1.1a-compliant in multiple power modes

FEATURES (CONT.)


- Advanced Features
 - Priority queuing—802.1p Layer 2 priority encoding
 - Virtual LANs—802.1q VLAN tagging and support for up to 64 VLANs
 - Jumbo frames (9 KB)
 - 802.3x flow control
 - Link aggregation—802.3ad, GEC/FEC, and Smart Load Balancing™
 - Failover
- Performance features
 - CPU task offload
 - Adaptive interrupts
- 484-pin PBGA package
- Power
 - Rails—1.2V core, 2.5V I/O, and 3.3V I/O
- 0.13 µm CMOS technology

APPLICATIONS

- Highly integrated LAN on Motherboard (LOM) designs
- Blade servers
- Rack-optimized servers
- Dual-port Gigabit Ethernet (GbE) Network Interface Controller (NIC) card



OVERVIEW

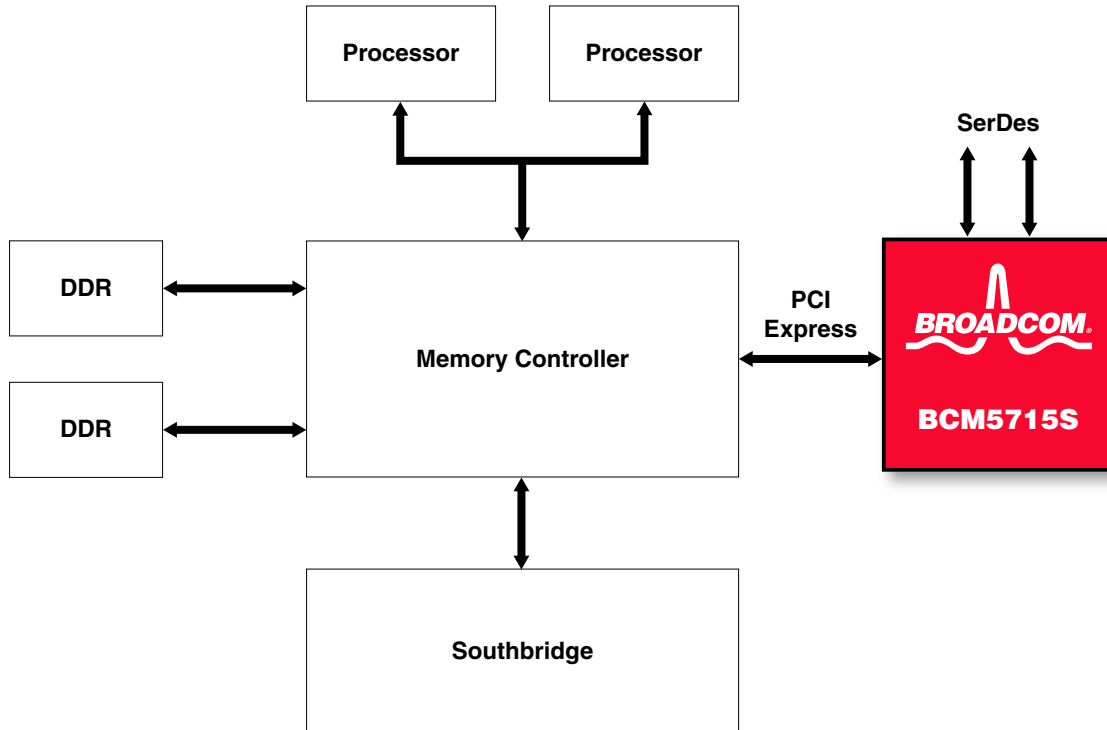

System Block Diagram

Designed as a gigabit dual-port LAN controller for high-performance server applications, the BCM5715S combines dual 1000BASE-X MACs with dual 1000BASE-X SerDes transceivers, a UMP, and an on-chip memory buffer in a single device. The device is fabricated in a 1.2V CMOS process, providing a low-power system solution.

The BCM5715S provides a single x4 PCI Express host interface and two GbE Controllers. Each function has its own PCI configuration space.

Each Ethernet controller has a dedicated on-chip, high-performance RISC processor for custom frame features.

The BCM5715S supports a UMP interface for high-speed system management communications via the dual-GbE ports. Two fully featured MACs provide full-duplex and half-duplex modes at 1000 Mbps.

Broadcom®, the pulse logo, **Connecting everything®**, the Connecting everything logo, NetXtreme®, and Smart Load Balancing™ are among the trademarks of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Any other trademarks or trade names mentioned are the property of their respective owners.

Connecting
everything®



BROADCOM CORPORATION

5300 California Avenue
Irvine, California 92617

© 2009 by BROADCOM CORPORATION. All rights reserved.

5715S-PB03-R 04/14/09

Phone: 949-926-5000
Fax: 949-926-5203
E-mail: info@broadcom.com
Web: www.broadcom.com