



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

for Non-Fusible Disconnect Switches

CDNF16 – CDNF160



CDNF16 CDNF25 CDNF32

CDNF30 CDNF60 CDNF100

CDNF160

Catalog number	3 pole	CDNF16	CDNF25	CDNF32	CDNF45	CDNF63	CDNF30	CDNF60	CDNF100	CDNF160
General purpose amp rating	A	16	25	40	60	80	30	60	100	125
Approvals ^①										
2 pole	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	UL98
3 pole	UL508	UL508	UL508	UL508	UL508	UL508	UL98	UL98	UL98	UL98
4 pole	UL508	UL508	UL508	UL508	UL508	UL508	UL98	UL98	UL98	UL98
Technical ratings UL,CSA ^②										
Max operating voltage	V	600	600	600	600	600	600	600	600	600
Max horsepower rating										
Three phase										
200 – 208V	HP	3	7.5	10	15	20	10	20	25	—
240V	HP	5	7.5	10	15	20	10	20	25	30
480V	HP	10	15	20	30	40	20	40	50	60
600V	HP	10	20	25	20	40	30	40	40	75
Single phase										
120V	HP	1/2	3/4	1	2	2	2	3	5	7.5
240V	HP	1.5	2	3	5	5	5	7.5	15	20
Technical ratings IEC ^③										
Rated insulation and operational voltage. AC20 and DC20 ^④	V	750	750	750	750	750	750	750	750	750
Rated thermal current, I_{th}										
AC 20/DC 20 open	A	25	32	40	63	80	40	63	115	200
AC 20/DC 20 enclosed	A	25	32	40	63	80	40	63	115	160
AC 21A	500V	16	25	32	63	80	40	63	100	160
	690V	A	16	25	32	63	80	40	63	100
Rated operational power AC23										
400/415V	kW	7.5	9	11	22	37	15	18.5	37	75
690V	kW	7.5	9	11	15	18.5	15	15	37	75
Physical characteristics										
Weight ^④	3 pole	lb	0.24	0.24	0.24	0.59	0.59	0.79	0.79	0.79
Dimension	3 pole	H in	2.68	2.68	2.68	3.60	3.60	3.94	3.94	5.00
		W in	1.38	1.38	1.38	2.07	2.07	2.76	2.76	4.96
		D in	2.20	2.20	2.20	2.85	2.85	2.95	2.95	2.93
Accessories										
Terminal lug kit		Integral								
Terminal shroud		•	•	•	•	•	•	•	•	•
Auxiliary contact		•	•	•	•	•	•	•	•	•
Handle UL/NEMA type										
Type 1, 3R, 12	•	•	•	•	•	•	•	•	•	•
Type 1, 3R, 4, 4X, 12	•	•	•	•	•	•	•	•	•	•
Handle type										
Selector	•	•	•	•	•	•	—	—	—	—
Pistol	•	•	•	•	•	•	•	•	•	•
Conversion kits										
6 pole	•	•	•	•	•	•	•	•	•	•
Transfer	•	•	•	•	•	•	•	•	•	•
Bypass	•	•	•	•	•	•	•	•	•	•
Mechanical interlock	•	•	•	•	•	•	•	—	—	—
Electrical interlock	—	—	—	—	—	—	—	—	—	—

• = Available

— = Not available

UL listed, CSA approved, IEC rated, CE marked

① UL listed switches are also CSA approved.

② For complete technical information please see page 58 & 59.

③ 1000V, IEC 408.

④ Switch only

Fusible


Non-Fused

Enclosed Fused

Enclosed Non-Fused

for Non-Fusible Disconnect Switches

BDNF200A – BDNF3150

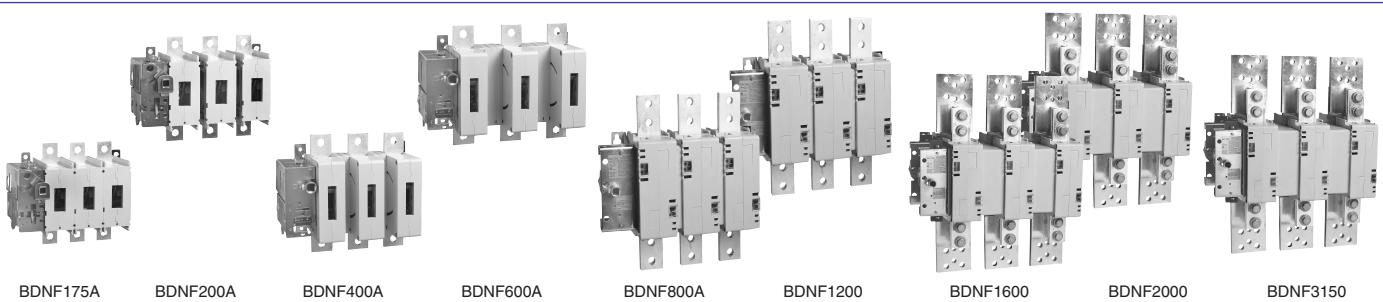

Fusible

Non-Fused

Enclosed Fused

Enclosed Non-Fused

Catalog number	3 pole	BDNF175A	BDNF200A	BDNF400	BDNF600A	BDNF800A	BDNF1200	BDNF1600	BDNF2000	BDNF3150
General purpose amp rating	A	175	200	400	600	800	1200	1600	2000	3150
Approvals ^①	2 pole 3 pole 4 pole	UL508 & IEC UL508 & IEC IEC	UL98 & IEC UL98 & IEC IEC	UL98 & IEC UL98 & IEC UL98 & IEC	UL98 & IEC UL98 & IEC UL98 & IEC	UL98 & IEC UL98 & IEC IEC	IEC IEC IEC			
Technical ratings UL,CSA^②										
Max operating voltage	V	600	600	600	600	600	600	600	600	600
Max horsepower rating										
Three phase										
200 – 208V	HP	30	60	100	150	200	—	—	—	—
240V	HP	40	75	125	200	250	—	—	—	—
480V	HP	75	150	250	400	500	—	—	—	—
600V	HP	100	200	350	500	600	—	—	—	—
Single phase										
120V	HP	—	—	—	—	—	—	—	—	—
240V	HP	—	—	—	—	—	—	—	—	—
Technical ratings IEC^③										
Rated insulation and operational voltage. AC20 and DC20 ^④	V	1000	1000	1000	1000	1000	1000	1000	1000	1000
Rated thermal current, I_{th}	A									
AC 20/DC 20 open	A	200	315	630	800	1250	1600	2500	2500	3150
AC 20/DC 20 enclosed	A	200	270	630	720	1250	1600	2300	2300	2600
AC 21A	A	200	250	630	800	1250	1600	2500	2500	3150
500V	A	200	250	630	800	1250	1600	2500	2500	3150
690V	A	200	250	630	800	1250	1600	2500	2500	3150
Rated operational power AC23										
400/415V kW	kW	90	132	315	355	400	400	400	400	400
690V kW	kW	170	200	355	—	—	—	—	—	—
Physical characteristics										
Weight ^④	3 pole	lb	6.61	6.61	13.66	13.66	35.9	38.55	127.7	127.7
Dimension	3 pole	H in	8.35	8.35	11.81	11.77	19.09	19.09	25.04	25.04
		W in	7.83	8.62	10.24	11.93	14.29	14.29	18.43	18.43
		D in	4.55	4.55	5.12	5.12	4.92	4.92	10.67	10.67
Accessories										
Terminal lug kit		BDTL25	BDTL25	BDTL26	BDTL27	BDTL30	BDTL28	BDTL28	BDTL28/2	BDTL28/2
Terminal shroud		•	•	•	•	•	•	—	—	—
Auxiliary contact		•	•	•	•	•	•	•	•	•
Handle UL/NEMA type										
Type 1, 3R, 12		•	•	•	•	•	•	•	•	•
Type 1, 3R, 4, 4X, 12		•	•	•	•	•	•	•	•	•
Handle type										
Selector		—	—	—	—	—	—	—	—	—
Pistol		•	•	•	•	•	•	•	•	•
Conversion kits										
6 pole		•	•	•	•	•	•	—	—	—
Transfer		•	•	•	•	•	•	—	—	—
Bypass		•	•	•	•	•	•	—	•	—
Mechanical interlock		•	•	•	•	•	•	—	—	•
Electrical interlock		•	•	•	•	•	•	•	•	•

S = Standard feature

• = Available

— = Not available

UL listed, CSA approved, IEC rated, CE marked

^① UL listed switches are also CSA approved.^② For complete technical information please see page 58 & 59.^③ 1000V, IEC 408.^④ Switch only