imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
11/12/05	А	ADDED "ROHS COMPLIANT"	Т.В.	B. S.	
3/11/06	В	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	С	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
1/12/08	D	RANGE WAS "RANGEE"	T.B.	B. S.	
	11/12/05 3/11/06 5/06/06	11/12/05 A 3/11/06 B 5/06/06 C	11/12/05AADDED "ROHS COMPLIANT"3/11/06BUPDATED MATERIAL SPEC.5/06/06CADDED CONTACT RESI. INFO.	11/12/05AADDED "ROHS COMPLIANT"T.B.3/11/06BUPDATED MATERIAL SPEC.T.B.5/06/06CADDED CONTACT RESL INFO.T.B.	11/12/05AADDED "ROHS COMPLIANT"T.B.B.S.3/11/06BUPDATED MATERIAL SPEC.T.B.B.S.5/06/06CADDED CONTACT RESI. INFO.T.B.B.S.

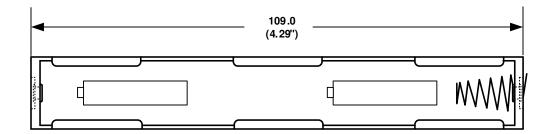





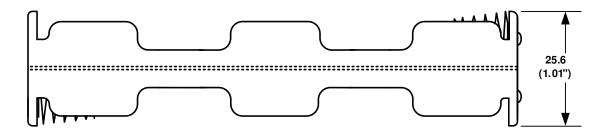



SPECIFICATIONS :

Plastic material - polypropylene Flammability Rating-UL94 HB, UL File No. E216959 Temperature Range: -10°C to +100°C Springs - nickel plated spring steel Wire - 152.4 mm Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C. Rivets - Brass, nickel plated 9 Volts Snaps - Brass, nickel plated Contact Resistance: Under 50m Ω for +/- contacts per EIA-540J000 ROHS COMPLIANT

Note: Dimensions in mm. (inches)								
TOLERANCES (EXCEPT AS NOTED)	Memory Protection Devices, Inc.							
	200 Broad Hollow Road, Farmingdale, New York 11735							
DECIMAL			SCALE	DRAWN BY	S.C.			
⁺ .5 (.020")			NONE	APPROVED BY				
FRACTIONAL	TITLE							
+ 8 (.030")	FOUR "AA" CELL HOLDER							
ANGULAR	DATE	DRAWING NUMBER						
+ 3°	1/12/2008	BH14AAL						