

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
9/10/06	Α	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
1/12/08	В	RANGE WAS "RANGEE"	T.B.	B.S.	

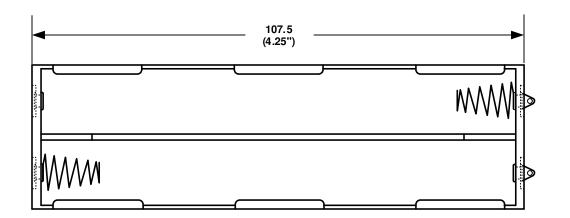



SOLDER LUGS = L (6") WIRE LEADS = W 9 VOLT TYPE SNAPS = SF

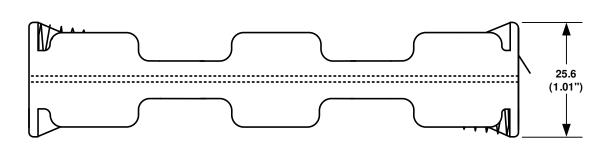



SOLDER LUGS SHOWN ABOVE

SPECIFICATIONS:

Plastic material - polypropylene

Flammability Rating-UL94 HB, UL File No. E216959

Temperature Range: -10°C to +100°C Springs - nickel plated spring steel

Wire - 152.4 mm Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.

Rivets - Brass, nickel plated

9 Volts Snaps - Brass, nickel plated

Contact Resistance: Under 50m Ω for +/- contacts per EIA-540J000

ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	Memory Protection Devices, Inc.							
	200 Broad Hollow Road, Farmingdale, New York 11735							
DECIMAL		SCALE	DRAWN BY	S.C.				
± .5 (.020")			NONE	APPROVED BY				
FRACTIONAL	TITLE							
± .8 (.030")	EIGHT "AA" CELL HOLDER							
ANGULAR	DATE	DRAWING NUMBE	R					
† 3° 1/12/2008		BH28AAL						