



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




New
BK80AAAB
AAA size(HR11/45)

Old
(HHR80AAAB)

Button top type

B type

■ Dimensions (with tube)

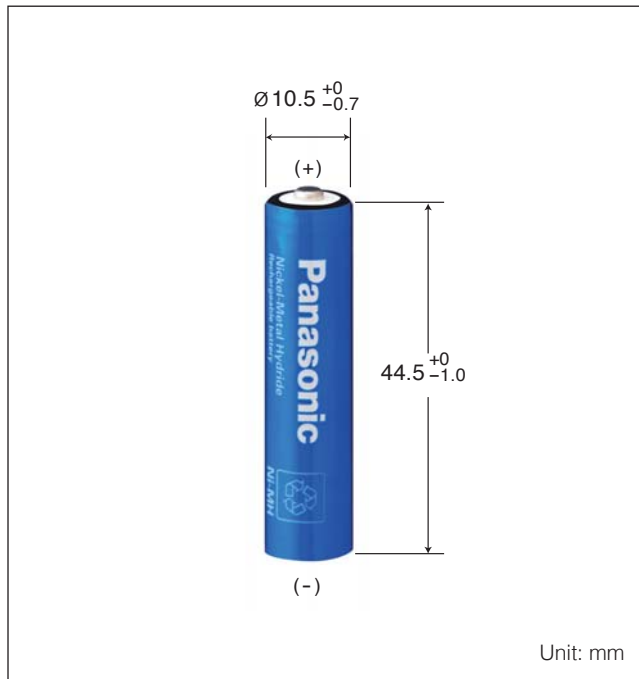


■ Specifications



Diameter		10.5 +0 / -0.7 mm	
Height		44.5 +0 / -1.0 mm	
Approximate Weight		13 g	
Nominal Voltage		1.2 V	
Discharge Capacity	Average ^{*1}	780 mAh	
	Rated (min.) ^{*2}	750 mAh	
Approx. Internal impedance at 1000Hz at charged state.		30 mΩ	
Charge	Standard	75 mA X 16 hrs.	
	Rapid ^{*3}	750 mA X 1.2 hrs.	
Ambient Temperature	Charge	Standard	0 °C to 45 °C
		Rapid	0 °C to 40 °C
	Discharge		-10 °C to 65 °C
	Storage	<1 year	-20 °C to 35 °C
<6 months		-20 °C to 45 °C	
<1 month		-20 °C to 55 °C	
<1 week		-20 °C to 65 °C	

*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.
 *2 For reference only.
 *3 Need specially designed control system. Please contact Panasonic for details.

■ Typical charge characteristics

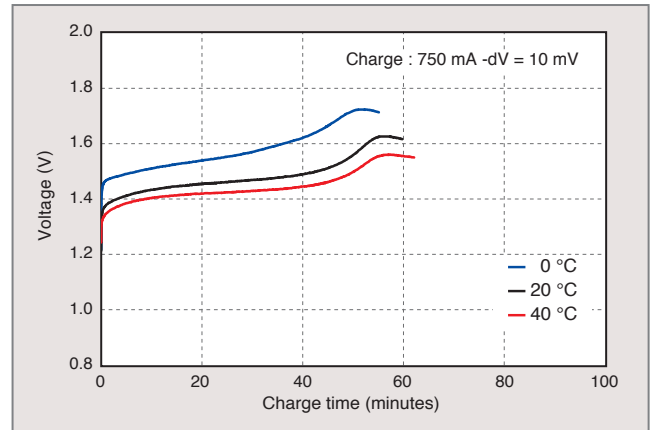

■ Typical discharge characteristics

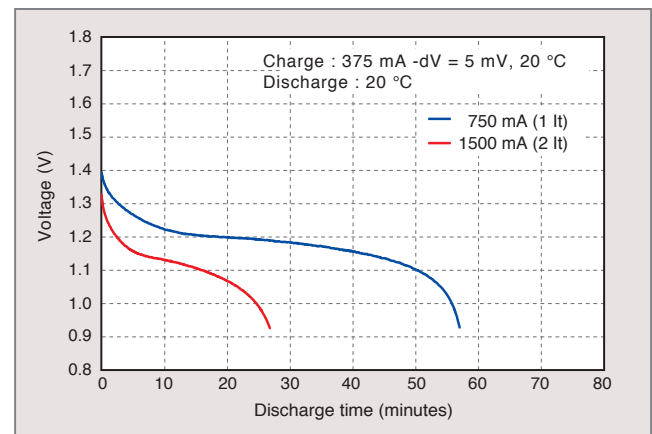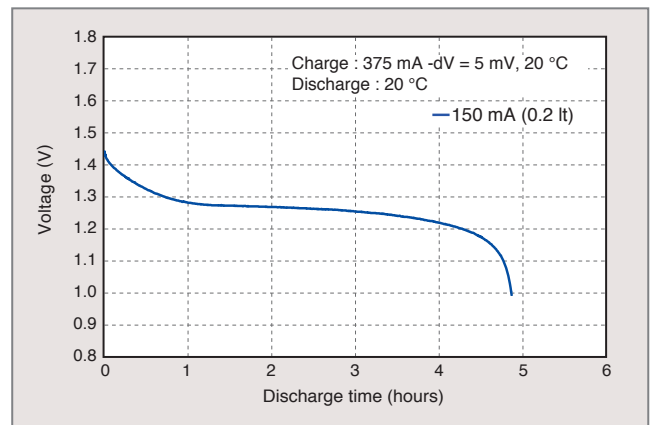

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.