

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








BL-21671-140


SHT I.I

 $2,77\pm0,05$ 1.60 ± 0.05 $[.109\pm.002]$ $[.063\pm.002]$ 7.87 ± 0.05 $[.310 \pm .002]$ $5,54\pm0,05$ $[.218\pm.002]$

NOTES:

LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO ± 0 , |7[.007].

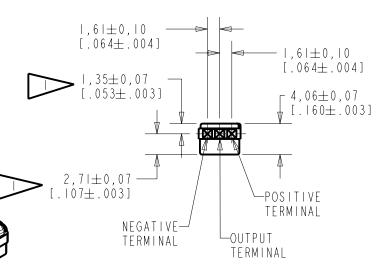

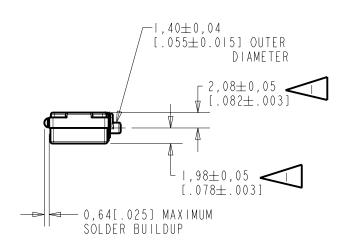


DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

NOMINAL WEIGHT 28.0 GRAMS


Revision	C.O. #	Implementation Da	e RELEASE LEVEL	RELEASE LEVEL		
A	M10101533	7 - 24 - 07	Release	A		
SCALE:		2:1		DR. BY	DATE	
DO NOT SCALE DRAWING					7 - 24 - 07 DATE	
TITLE:	MIC	ROPHONE	BL-21671-140	GJP APP. BY	7 - 26 - 07 DATE	
	OUTL	INE DRAWING	SHT I.I	GJP	7 - 26 - 07	

BL-21671-140

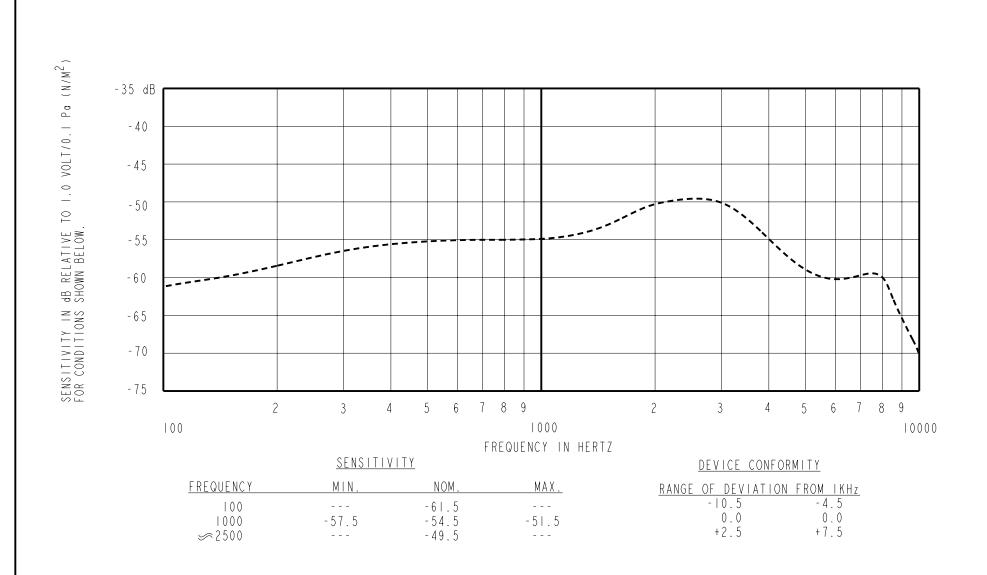

NOTES: I. CASE CONNECTED TO NEGATIVE TERMINAL.

PORT	DC	AMPLIFIER	SENSITIVITY CHANGE	"A" WEIGHTED NOISE	OUTPUT IMPEDANCE OHMS		CAPACITANCE ±50%		
LOCATION	SUPPLY	CURRENT DRAIN	TO 1.1 VDC	(I kHz EQUIV. SPL)	MIN.	NOM.	MAX.	I - 2	I - 3
128	1.3V	50 μA MAX.	3 dB MAX.	32.0 dB MAX.	8000	13000	22000	N / A	N / A

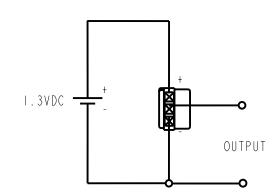

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
			Released		Δ
Α	M10101533	7 - 24 - 07			/ \
		MITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION RELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR			DATE
		OF LEST EQUIPMENT WITH KN NT AND TEST METHOD VARIAT		SDZ	7 - 24 - 07
				CK. BY	DATE

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

ELIMINATIO	ON OF EQUIPMENT AND TEST METHOD VARIATI	ON	SDZ
			CK. BY
TITLE:	MICROPHONE	BL-21671-140	GJP
	MICKOLITORE	DE 210/1 140	APP. BY
	PERFORMANCE SPECIFICATION	SHT 2.1	G.IP

7-26-07

7-26-07