



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



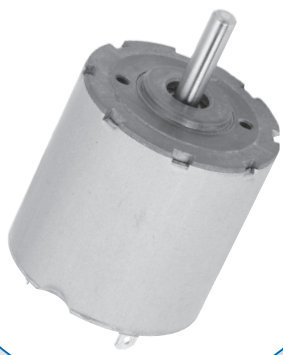


BLDC 40S40A

22.1.053D

Brushless 3 – Phase DC Motor

Rated Voltage	No Load Speed	Rated Speed	Cont. Power	Rated Torque	Current at rated Speed	Efficiency at Duty Point
[V]	[rpm]	[rpm]	[W]	[mNm]	[A]	[%]
24	2.880	2.550	48	180	2,5	81

Motor Code: 121088800039

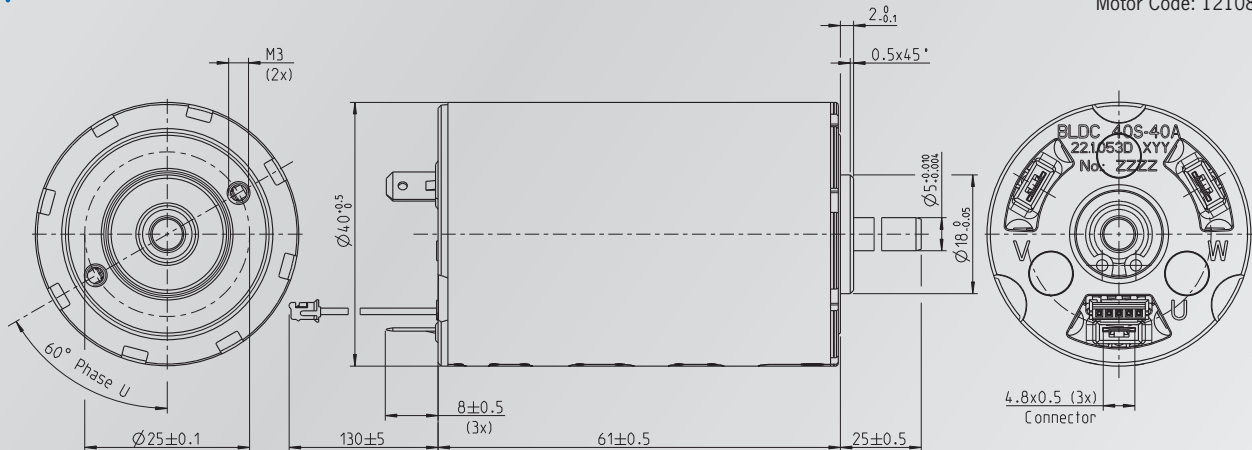

General informations


- **Class of protection:** IP20
- **Mounting position:** free
- **Duty cycle:** up to 100 %
- **Bearing system:** Ball Bearings
- **Torque Constant:** 76 mNm/A
- **Weight:** 0,365 kg
- **Rotor Inertia:** 62 gcm²
- **Oper. Temp. Range:** -20 °C to +45 °C
- **Max. Temp. Rise:** 70 K
- **Direction of Rotation:** CW / CCW
- **Class of Insulation:** H
- **Shaft Material:** Steel, not hardened
- **Number of Poles:** 16

Options

- **Integrated Drive Electro.:** Yes
- **Planetary Gearbox:** Yes
- **Sensorless Operation:** Yes
- **Shaft hardened (Surface):** Yes

Features

- High power-to-volume ratio
- High efficiency at duty point
- Extremely reliable

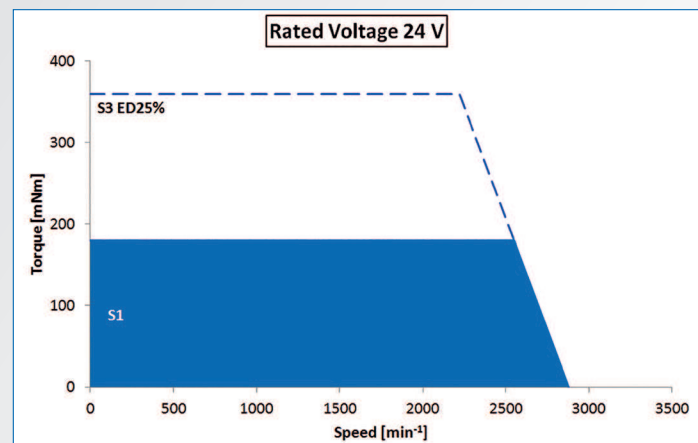

PM DM

Minebea Group of Companies
 Minebea-Weg 1
 78052 Villingen-Schwenningen
 GERMANY
 www.pmdm.de
 Phone: +49 (0)7721 997-100
 E-Mail: sales@pmdm.de

Minebea
 Passion to Exceed Precision

Sample Request Form Brushless DC

Customer		Contact	
Adress		Telephone	
Enduser		Email	
Project No.		Project Name	
Customer Part No.		NMB Part No.	
Commercial Information			
Sample Qty.		Competitor	
Sample Price		Part No.	
Annual Qty.		Application	
Target Price		Application Details	
Time Schedule			
Technical Specification			
Drive Condition	Drive	Torque	Rated Torque
	Source		Max. Torque
Voltage	Rated Voltage	Life	No. of Cycles per Hour
	Operating Voltage		Duty Cycle
Speed	No Load Speed	Shaft Rotation	CW
	Rated Speed		CCw
Current	Rated Current		Both
	Stall Current	Ambient Temp. Range	
Mechanical Dimensions			
Motor Diameter		Shaft Diameter	
Motor Length		Shaft Length	
Special Requirements			