



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Laird Technologies
 Web site: www.LairdTech.com

[All Categories](#) > [EMI Solutions](#) > [EMI Shielding & Gaskets](#) > [Board-Level Shielding](#) > [Standard Surface Mount Shields-Two-Piece](#) > [Item # BMIS-206](#)

Item # BMIS-206 Standard Surface Mount Shields-Two-Piece

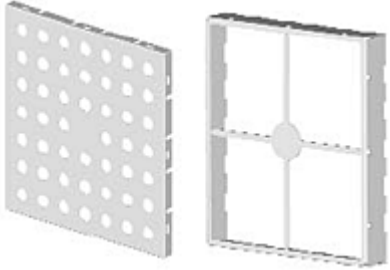

[larger image](#)

- 121, 169, 225 BGA
- 32, 44, 52, 68 PLCC
- 48, 100 VQFP
- 44, 48, 64, 80, 100 QFP

Specifications

| | |
|--|---------------------------|
| Surface Area | 1.879 inches ² |
| Surface Area | 1212.39 mm ² |
| Maximum Overall Dimension | 1.326 x 1.450 inches |
| Maximum Overall Dimension | 33.68 x 36.83 mm |
| Maximum Overall Height | 0.2 inches |
| Maximum Overall Height | 5.08 mm |
| Material Thickness | 0.20 mm |
| Carrier Tape Width | 56 mm |
| Carrier Tape Pitch | 40 mm |
| Weight | 1.5 gms |
| Pick-up Spot Diameter | ≥ 6 mm |
| Carrier Tape Material | LTIMS-LCB |
| Cover Tape Material | LTIMS-PSA |
| Reel Diameter | 381 mm |
| Reel Material | Plastic |
| Parts Per Reel | 300 |
| Material | 0.20 mm CRS Tin |
| Packaging | EIA-481 |
| Co-planarity (Test LTWI-1119 & ANSI/JSTD-002) | < 0.10 mm |
| Solderability (Test MIL-STD-202 Method 208) | >99 % |
| Surface Mount Solderability (Test ANSI/EIA 638) | Passes |

| | |
|--|--------|
| Appearance (Test LTIES-125) | Passes |
| Adhesion (Test ASTM B-571) | Passes |
| 3 Axis Mechanical Shock (Test LTES-461) | Passes |

[Print](#) [Back](#)