



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FEATURES AND BENEFITS*

- Up to 1,000,000 duty cycles or 10 year DC life
- 48V DC working voltage
- Active cell balancing
- Temperature output
- Overvoltage outputs available
- High power density
- Extreme Vibration Environment Compatible

TYPICAL APPLICATIONS

- Hybrid vehicles
- Rail
- Heavy industrial equipment
- UPS systems



PRODUCT SPECIFICATIONS

ELECTRICAL

BMOD0165 P048 C01

Rated Capacitance ¹	165 F
Minimum Capacitance, initial ¹	165 F
Maximum Capacitance, initial ¹	198 F
Maximum ESR _{DC} , initial ¹	6.0 mΩ
Test Current for Capacitance and ESR _{DC} ¹	100 A
Rated Voltage	48 V
Stored Energy ⁴	53 Wh
Absolute Maximum Voltage ²	51 V
Absolute Maximum Current	1,900 A
Maximum Series Voltage	750 V
Capacitance of Individual Cells ⁸	3,000 F
Stored Energy, Individual Cell ⁸	3.0 Wh
Number of Cells	18

TEMPERATURE

Operating Temperature (Cell Case Temperature)	
Minimum	-40°C
Maximum	65°C
Storage Temperature (Stored Uncharged)	
Minimum	-40°C
Maximum	70°C

*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase.
See the warranty details for applicable operating and use requirements.

PRODUCT SPECIFICATIONS (Cont'd)**PHYSICAL****BMOD0165 P048 C01**

Mass, typical	14.2 kg
Power Terminals	M8/M10
Recommended Torque - Terminal	20 Nm (M8)/30 Nm (M10)
Vibration Specification	ISO 16750-3, Table 12
Shock Specification	IEC 60068-2-27, -29
Environmental Protection	IP65
Cooling	Natural Convection

MONITORING / CELL VOLTAGE MANAGEMENT

Internal Temperature Sensor ³	NTC Thermistor (10 kΩ)
Temperature Interface	Analog
Cell Voltage Monitoring ³	Overvoltage Alarm (open collector)
Connector (Mating)	Deutsch DTM04-4P, Amphenol ATM04-4P
Cell Management System	CMS 2.0

SAFETY

Short Circuit Current, typical (Current possible with short circuit from rated voltage. Do not use as an operating current.)	8,100 A
Certifications	RoHS, UL810a (50 volts)
High-Pot Test ⁹	2,500 VDC

TYPICAL CHARACTERISTICS

THERMAL CHARACTERISTICS


BMOD0165 P048 C01

Thermal Resistance (R_{ca} , All Cell Cases to Ambient), typical ⁵	0.40°C/W
Thermal Capacitance (C_{th}), typical	13,000 J/°C
Maximum Continuous Current ($\Delta T = 15\text{ °C}$) ⁵ (BOL, Beginning of Life)	79 A, RMS
Maximum Continuous Current ($\Delta T = 40\text{ °C}$) ⁵ (BOL, Beginning of Life)	130 A, RMS

LIFE



DC Life at High Temperature ¹ (held continuously at Rated Voltage and Maximum Operating Temperature)	1,500 hours
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Projected DC Life at 25°C ¹ (held continuously at Rated Voltage)	10 years
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Projected Cycle Life at 25°C ^{1,6,7}	1,000,000 cycles
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Test Current	100 A
Shelf Life (Stored uncharged at 25°C)	4 years

ESR AND CAPACITANCE VS TEMPERATURE

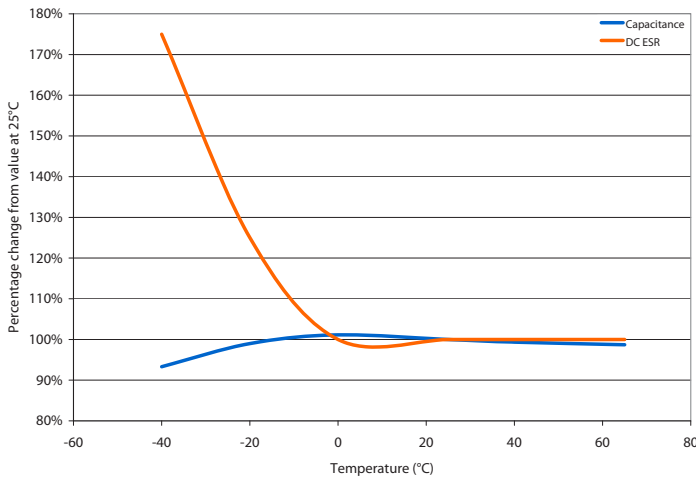

NOTES

1. Capacitance and ESR_{DC} measured at 25°C using specified test current per waveform below.
2. Absolute maximum voltage, non-repeated. Not to exceed 1 second.
3. Please refer to module user manual for additional technical details.
4. $E_{\text{stored}} = \frac{1}{2} \frac{CV^2}{3,600}$
5. $\Delta T = I_{\text{RMS}}^2 \times ESR \times R_{ca}$
6. Cycle using specified test current per waveform below.
7. Cycle life varies depending upon application-specific characteristics. Actual results will vary.
8. Per United Nations material classification UN3499, all Maxwell ultracapacitors have less than 10 Wh capacity to meet the requirements of Special Provisions 361. Both individual ultracapacitors and modules composed of those ultracapacitors shipped by Maxwell can be transported without being treated as dangerous goods (hazardous materials) under transportation regulations.
9. Duration = 60 seconds. Not intended as an operating parameter.

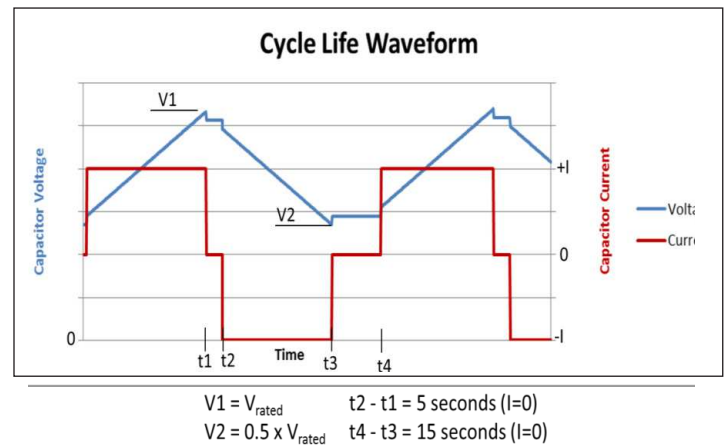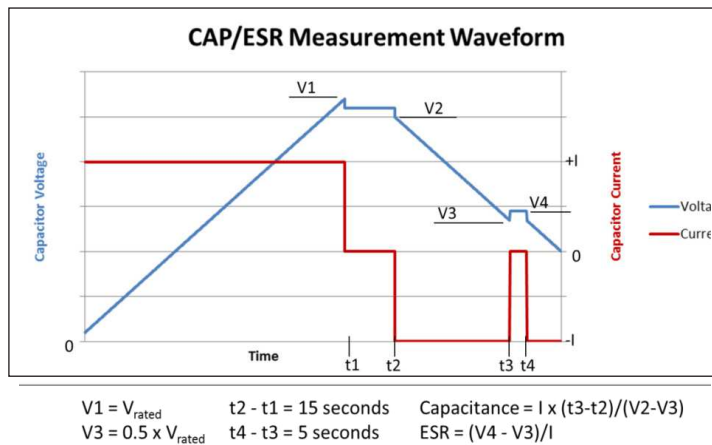

[illegible]

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application. All products featured on this datasheet are covered by the following U.S. patents and their respective foreign counterparts: 6643119, 7180726, 7295423, 7342770, 7352558, 7384433, 7440258, 7492571, 7508651, 7580243, 7791860, 7816891, 7859826, 7883553, 7935155, 8072734, 8098481, 8279580, and patents pending.



Maxwell Technologies, Inc.
Global Headquarters
 3888 Calle Fortunada
 San Diego, CA 92123
 USA
 Tel: +1 (858) 503-3300
 Fax: +1 (858) 503-3301



Maxwell Technologies SA
Route de Montena 65
CH-1728 Rossens
Switzerland
Tel: +41 (0)26 411 85 00
Fax: +41 (0)26 411 85 05



Maxwell Technologies, GmbH
Leopoldstrasse 244
80807 München
Germany
Tel: +49 (0)89 / 4161403 0
Fax: +49 (0)89 / 4161403 99



Maxwell Technologies
Shanghai Trading Co., Ltd
Unit A2BC, 12th Floor
Huarun Times Square
500 Zhangyang Road, Pudong
Shanghai 200122, P.R. China
Phone: +86 21 3852 4000
Fax: +86 21 3852 4099



Maxwell Technologies Korea Co., Ltd
Room 1524, D-Cube City
Office Tower, 15F #662
Gyeongin-Ro, Guro-Gu,
Seoul, Korea 152-706
Phone: +82 10 4518 9829

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, BOOSTCAP, C CELL, D CELL and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc. and may not be copied, imitated or used, in whole or in part, without the prior written permission from Maxwell Technologies, Inc. All contents copyright © 2015 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.