



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



USB radio stick deRFusb 13E00 | 13E06

Datasheet

- The compact designed USB radio stick deRFusb-13E00 contains a powerful Cortex-M3 microcontroller with 256 Kb High-Speed Flash and a sub-GHz ISM band transceiver.
- The transceiver AT86RF212 is intended for ZigBee, IEEE 802.15.4, 6LoWPAN, RF4CE and proprietary ISM applications. It uses a 128-Bit AES encryption.
- With the integrated chip antenna distances of more than 100 m can be reached for line of sight conditions.
- The radio stick is equipped with 3 LEDs for status indication.
- The stick comes optionally with a 2 Gb NAND on board that can be used as mass storage for user defined data.




Technical Data


Dimensions	71.0 x 23.0 x 8.7 mm (case)
Operating temperature	-20°C to 70°C
Control and display elements	3x LED (red, yellow, green)
Power supply	USB powered
Power consumption	TX: 65 mA RX: 64 mA Idle: 45 mA
Connections	USB connector type A
Antenna	Chip ceramic antenna
Antenna gain	-0.7 dBi (peak) -2.6 dBi (average)
Antenna diversity	No
Range	>100 m (line of sight)
Frequency range	868 MHz, 915 MHz
Transmitting power	up to +9 dBm @ 915 MHz up to +5 dBm @ 868 MHz
Receiver sensitivity	Max. -106 dBm @ 868 MHz Max. -104 dBm @ 915 MHz
Communication standard	IEEE 802.15.4
Data rate	20/100/200/400 kBit/s @ 868 MHz 40/250/500/1000 kBit/s @ 915 MHz
Microcontroller	ATSAM3S4B
Transceiver	AT86RF212
Additional non-volatile memory	None (deRFusb-13E00) 2 Gb NAND flash (deRFusb-13E06)
Interfaces	USB, optional: JTAG and Debug
Certification	CE, ETSI, FCC pending

Technical Data

Board Overlay

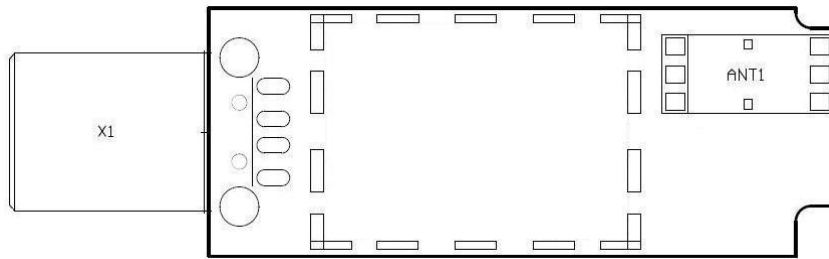

(Top view)

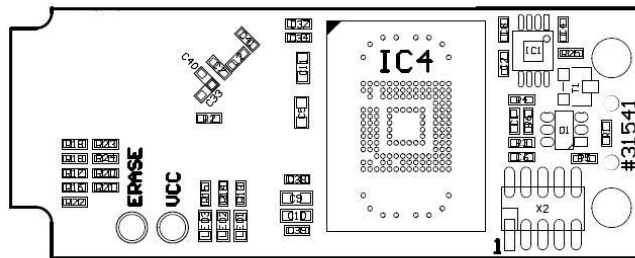

(Bottom view – with 10 pin connector and NAND flash)

Overlay

Scope of delivery

USB stick deRFusb-13E00 (with case)
 USB stick deRFusb-13E06 (with case and NAND)

Order No.

BN-031807
 BN-031539

Order Information

Accessories (optional)

SAM-ICE adapter

BN-028337

Board versions

USB stick deRFusb-13E00 JTAG (with 10pin connector)	BN-033206
USB stick deRFusb-13E06 JTAG (with 10pin and NAND)	BN-033207
USB stick deRFusb-23E00 JTAG (with 10pin connector)	BN-033202
USB stick deRFusb-23E06 JTAG (with 10pin and NAND)	BN-033203
USB stick deRFusb-23E00 (with case)	BN-031805
USB stick deRFusb-23E06 (with case and NAND)	BN-031075
Analyzer stick BitCatcher sub-GHz	BN-600035
Analyzer stick BitCatcher 2.4 GHz	BN-600034
Analyzer stick Perytons 2.4 GHz	BN-028636

Variants

More information about the variants is described in detail in the user manual.

Order online: <https://shop.dresden-elektronik.de>