mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Pomona®

Model BNC-C BNC Male To Male Cable Assembly

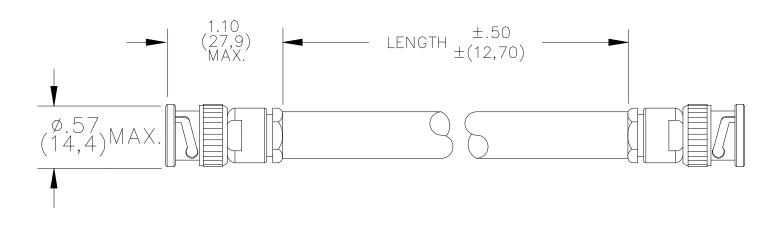

| Part No. | Cable Type | Capacitance PF/ft. | Nominal Impedance | Cable Color | Cable O. D. |
|----------|------------|-----------------------|----------------------|-------------|-------------|
| BNC-C-XX | RG58C/U | 30.8 | 50 Ohms | Black | 0.195" |

MATERIALS:

BNC Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass Dielectric: PTFE

RATINGS:

Operating Voltage: Shield-Earth: 33VRMS/70VDC Max Inner Conductor/Shield: 500VRMS Max Operating Temperature: +80°C (+176°F) Max Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model BNC-C-XX

XX = Cable Length in inches, length tolerance: ± 0.5 " Standard Lengths: 18", 24", 36", 48", 60" Upon request, other lengths may be quoted.

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

10/1/07

Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com