



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






SparkFun SSOP to DIP Adapter - 28-Pin

BOB-00500 ROHS ✓

★★★★★ 1

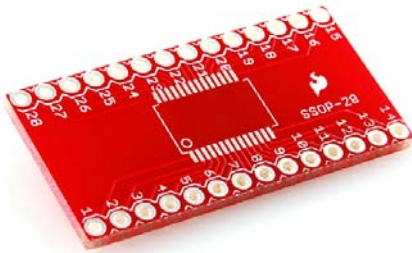

© images are CC BY-NC-SA 3.0

Description: 8, 16, 20, and 28-Pin SSOP to DIP break out boards. The footprint was rotated to accommodate different width SSOP devices and can be used with any pin count up to 28 pins. Designed to be used with 0.65mm pitch devices but can also be used with 0.025" pitch devices (comes out to ~0.635mm). We've made these 0.635mm devices fit just fine. Can be used with packages that have a lead span of .230" up to .350".

40 Pin break-away headers are perfect for use with these custom PCBs. Machine pin headers may be a better option for IC sockets. Pad layout fits all standard SSOP .65mm and can accommodate .635mm pitch devices.

Dimensions:

- 8-pin: 0.6 x 0.4" (15.24 x 10.16mm) 500mil DIP spacing
- 16-pin: 1.0 x 0.4" (25.4 x 10.16mm) 400mil DIP spacing
- 20-pin: 0.8 x 1.0" (20.32 x 25.4mm) 700mil DIP spacing
- 28-pin: 1.4 x 0.7" (35.56 x 17.78mm) 600mil DIP spacing.