



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# VRLA Rechargeable Battery

## BP120-12



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Flame-arrestor is installed to ensure safety.
- Carry handles for easy installation.
- Absorbent Glass Mat technology for efficient gas recombination.

### APPLICATION

- UPS
- Telecom
- Golf-Carts



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	120Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	39.5Kg(87.1lbs.)
Terminals	B4 (Fitting M6 bolt & nut) I2 is optional
Internal Resistance	≤4mΩ (Fully Charged )
Max. Discharge Current	800 A (5 sec.)
Max. Charge Current	36 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS( UL 94-HB) BP120-12 Optional: Flame Retardant ABS(UL 94-V0) BP120-12FR






- IEC 60896-21/22
- JIS C 8704-2
- GB/T 19638.2

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

- **Length**  
407±2.0 (16.02±0.08)
- **Width**  
173±2.0 (6.81±0.08)
- **Container Height**  
210±2.0 (8.27±0.08)
- **Total Height**  
239±2.0 (9.41±0.08)

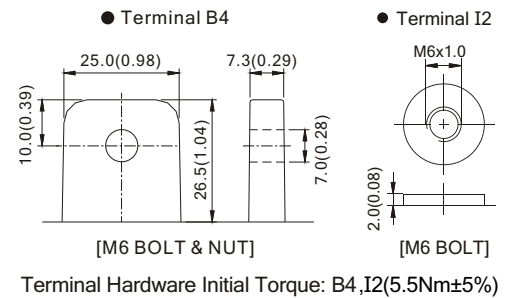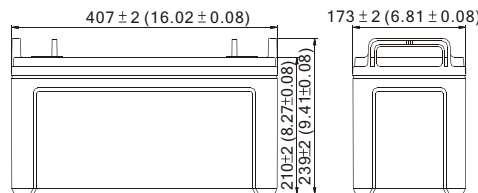

### Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell) \ Discharge Time	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	2346	1523	873.4	349.8	241.2	134.8	70.92
1.75V	2454	1581	899.6	356.8	244.8	136.8	72.00
1.70V	2530	1617	915.7	360.0	246.1	137.5	72.36
1.65V	2588	1640	926.7	362.5	247.2	137.9	72.58
1.60V	2640	1656	936.0	364.7	247.7	137.9	72.58

### Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell) \ Discharge Time	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	204	129	73.4	29.1	20.10	11.23	5.91
1.75V	213	134	75.6	29.7	20.40	11.40	6.00
1.70V	220	137	77.0	30.0	20.51	11.46	6.03
1.65V	225	139	77.9	30.2	20.60	11.49	6.05
1.60V	230	140	78.7	30.4	20.64	11.49	6.05

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.