



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





VRLA Rechargeable Battery

BP3-12



FEATURES

- Maintenance Free (topping up not needed)
- Non - spillable (no free electrolyte)
- Low Self Discharge, less than 3% per month
- both Vertical & Horizontal installations






APPLICATIONS

- UPS
- Security Systems
- Medical Equipment
- Power Packs
- Emergency Lighting
- R/C Cars & Planes



SPECIFICATIONS

| | |
|-----------------------------|--|
| Nominal Voltage | 12 V |
| Nominal Capacity | 3.0Ah @ 20 hour rate F.V.(1.75V/cell) |
| Approx. Weight | 1300g(2.87lbs.) |
| Terminals | T1 (Faston Tab 187) T2 is optional |
| Internal Resistance | ≤50m Ω (Fully Charged) |
| Max. Discharge Current | 45 A (5 sec.) |
| Max. Charge Current | 0.9 A |
| Operating Temperature Range | Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F) |
| Container Material | Standard: ABS(UL 94-HB) BP3-12 Optional: Flame Retardant ABS(UL 94-V0) BP3-12FR |


 MH19884




- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

134±1.5 (5.28±0.06)

Width



67±1.5 (2.64±0.06)

Container Height

60±1.5 (2.36±0.06)

Total Height

66±2.0 (2.60±0.08)

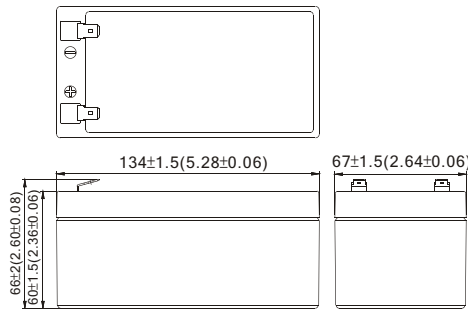

Constant power discharge characteristics at 25 °C/77 °F

Unit: W

| Discharge F.V. | Discharge Time | 5 Min | 10 Min | 15 Min | 30 Min | 1 Hr | 3 Hr | 5 Hr | 10 Hr | 20 Hr |
|----------------|----------------|-------|--------|--------|--------|-------|------|-------|-------|-------|
| 10.8V | | 108.5 | 79.8 | 64.0 | 38.07 | 21.83 | 8.74 | 6.029 | 3.369 | 1.773 |
| 10.5V | | 125.5 | 86.5 | 66.9 | 39.52 | 22.49 | 8.92 | 6.120 | 3.420 | 1.800 |
| 10.2V | | 133.4 | 89.6 | 69.0 | 40.42 | 22.89 | 9.00 | 6.153 | 3.437 | 1.812 |
| 9.9V | | 139.4 | 91.8 | 70.6 | 40.99 | 23.17 | 9.06 | 6.175 | 3.447 | 1.812 |
| 9.6V | | 144.0 | 93.6 | 72.0 | 41.40 | 23.40 | 9.12 | 6.193 | 3.447 | 1.812 |

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

| Discharge F.V. | Discharge Time | 5 Min | 10 Min | 15 Min | 30 Min | 1 Hr | 3 Hr | 5 Hr | 10 Hr | 20 Hr |
|----------------|----------------|-------|--------|--------|--------|-------|-------|-------|-------|-------|
| 10.8V | | 9.77 | 7.03 | 5.56 | 3.23 | 1.835 | 0.729 | 0.502 | 0.281 | 0.148 |
| 10.5V | | 11.52 | 7.61 | 5.82 | 3.35 | 1.890 | 0.743 | 0.510 | 0.285 | 0.150 |
| 10.2V | | 12.24 | 7.89 | 6.00 | 3.43 | 1.924 | 0.750 | 0.513 | 0.286 | 0.151 |
| 9.9V | | 12.79 | 8.08 | 6.14 | 3.47 | 1.947 | 0.755 | 0.515 | 0.287 | 0.151 |
| 9.6V | | 13.21 | 8.24 | 6.26 | 3.51 | 1.966 | 0.760 | 0.516 | 0.287 | 0.151 |

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.