



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Silicon Photodiode for the Visible Spectral Range

## Version 1.3

---

### BPW 21



#### Features:

- Especially suitable for applications from 350 nm to 820 nm
- Adapted to human eye sensitivity ( $V_\lambda$ )
- Hermetically sealed metal package (similar to TO-5)

#### Applications

- Exposure meter for daylight and artificial light
- For artificial light of high color temperature in photographic fields and color analysis

#### Ordering Information

Type:	Ordering Code
BPW 21	Q62702P0885

**Maximum Ratings** ( $T_A = 25\text{ °C}$ )

Parameter	Symbol	Values	Unit
Operating and storage temperature range	$T_{op}; T_{stg}$	-40 ... 80	°C
Reverse voltage	$V_R$	10	V
Total Power dissipation	$P_{tot}$	250	mW


**Characteristics** ( $T_A = 25\text{ °C}$ )

Parameter	Symbol	Values	Unit
Spectral sensitivity ( $V_R = 5\text{ V}$ , standard light/Normlicht A, $T = 2856\text{ K}$ )	(typ) S	10 ( $\geq 5.5$ )	nA/lx
Wavelength of max. sensitivity	(typ) $\lambda_{S\ max}$	550	nm
Spectral range of sensitivity	(typ) $\lambda_{10\%}$	(typ) 350 ... 820	nm
Radiant sensitive area	(typ) A	7.45	mm <sup>2</sup>
Dimensions of radiant sensitive area	(typ) L x W	2.73 x 2.73	mm x mm
Half angle	(typ) $\varphi$	$\pm 55$	°
Dark current ( $V_R = 5\text{ V}$ )	(typ (max)) $I_R$	2 ( $\leq 30$ )	nA
Dark current ( $V_R = 10\text{ mV}$ )	(typ (max)) $I_R$	8 ( $\leq 200$ )	pA
Spectral sensitivity of the chip ( $\lambda = 550\text{ nm}$ )	(typ) $S_{\lambda\ typ}$	0.34	A / W
Quantum yield of the chip ( $\lambda = 550\text{ nm}$ )	(typ) $\eta$	0.77	Electrons / Photon
Open-circuit voltage ( $E_v = 1000\text{ lx}$ , Std. Light A)	(typ (min)) $V_O$	400 ( $\geq 320$ )	mV
Short-circuit current ( $E_v = 1000\text{ lx}$ , Std. Light A)	(typ) $I_{SC}$	10	$\mu\text{A}$
Rise and fall time ( $R_L = 1\text{ k}\Omega$ , $V_R = 5\text{ V}$ , $\lambda = 550\text{ nm}$ )	(typ) $t_r, t_f$	1.5	$\mu\text{s}$
Forward voltage ( $I_F = 100\text{ mA}$ , $E = 0$ )	(typ) $V_F$	1.2	V
Capacitance ( $V_R = 0\text{ V}$ , $f = 1\text{ MHz}$ , $E = 0$ )	(typ) $C_0$	580	pF
Temperature coefficient of $V_O$	(typ) $TC_V$	-2.6	mV / K

Parameter		Symbol	Values	Unit
Temperature coefficient of $I_{SC}$ ( $\lambda = 550 \text{ nm}$ )	(typ)	$TC_1$	-0.05	% / K
Noise equivalent power ( $V_R = 5 \text{ V}$ , $\lambda = 550 \text{ nm}$ )	(typ)	NEP	0.074	$\mu\text{W} / \text{Hz}^{1/2}$
Detection limit ( $V_R = 5 \text{ V}$ , $\lambda = 550 \text{ nm}$ )	(typ)	$D^*$	$3.7 \times 10^{12}$	$\text{cm} \times \text{Hz}^{1/2} / \text{W}$


**Relative Spectral Sensitivity** <sup>1) page 7</sup>

$S_{rel} = f(\lambda)$

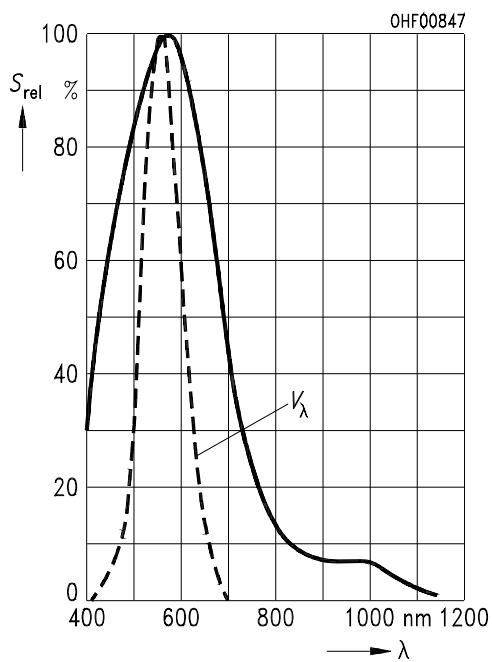


**Photocurrent / Open-Circuit Voltage** <sup>1) page 7</sup>

$I_P (V_R = 5 \text{ V}) / V_O = f(E_V)$

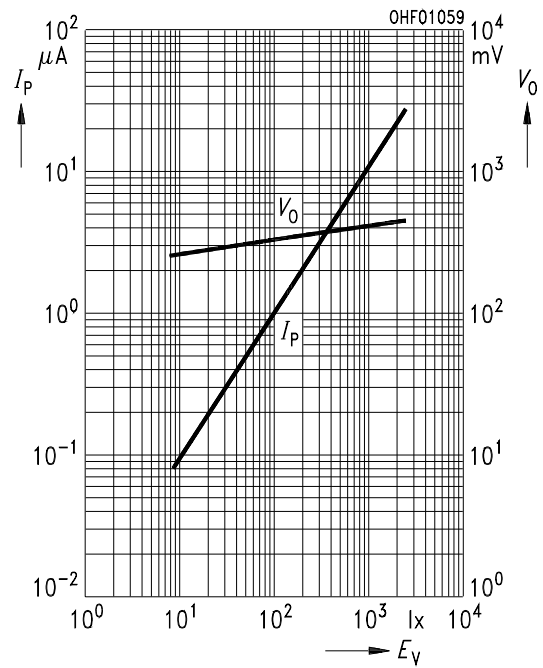


**Power Consumption**

$P_{tot} = f(T_A)$

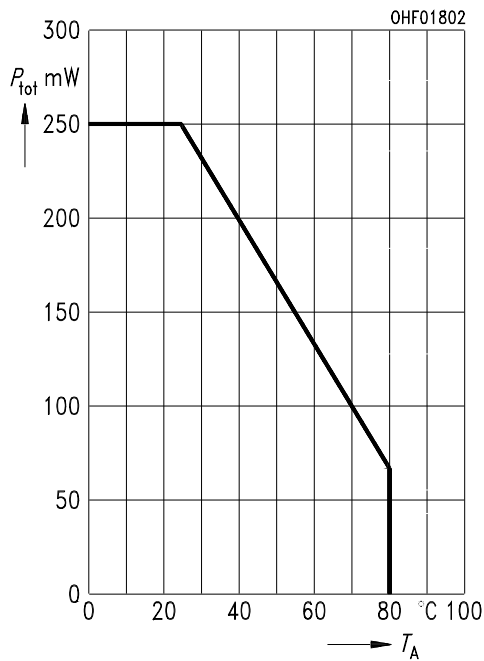


**Dark Current** <sup>1) page 7</sup>

$I_R = f(V_R), E = 0$

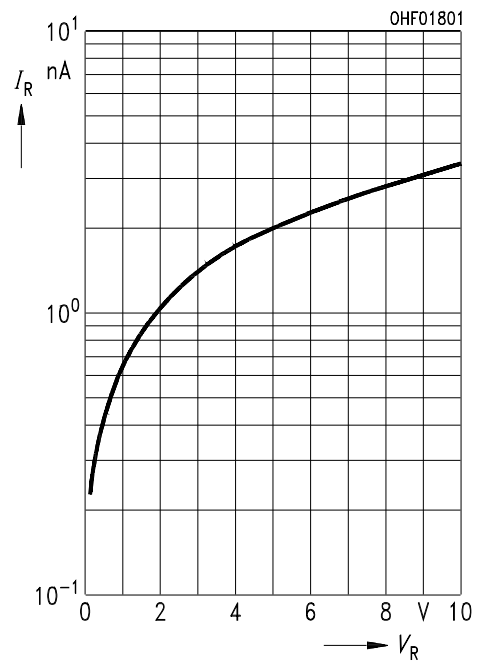


**Capacitance** <sup>1) page 7</sup>

$C = f(V_R), f = 1 \text{ MHz}, E = 0$

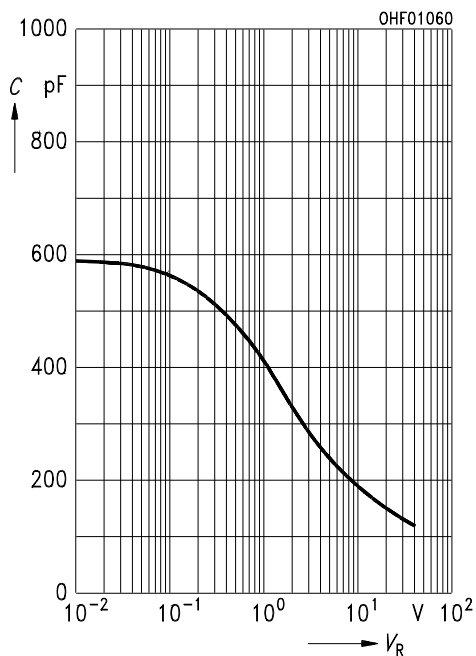


**Dark Current** <sup>1) page 7</sup>

$I_R = f(T_A), V_R = 5 \text{ V}, E = 0$

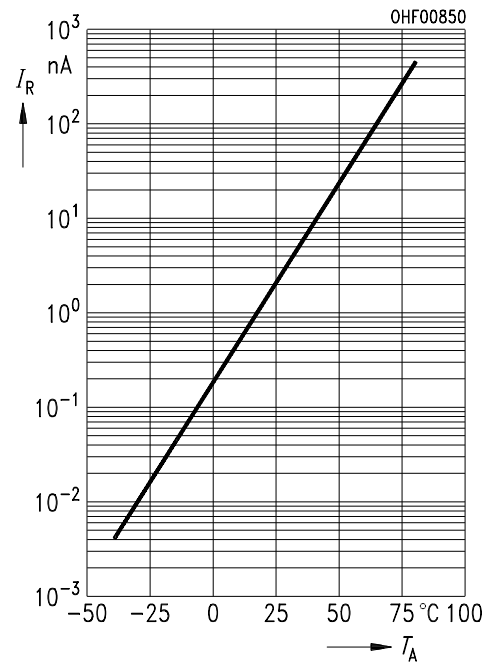


**Directional Characteristics** <sup>1) page 7</sup>

$S_{rel} = f(\phi)$

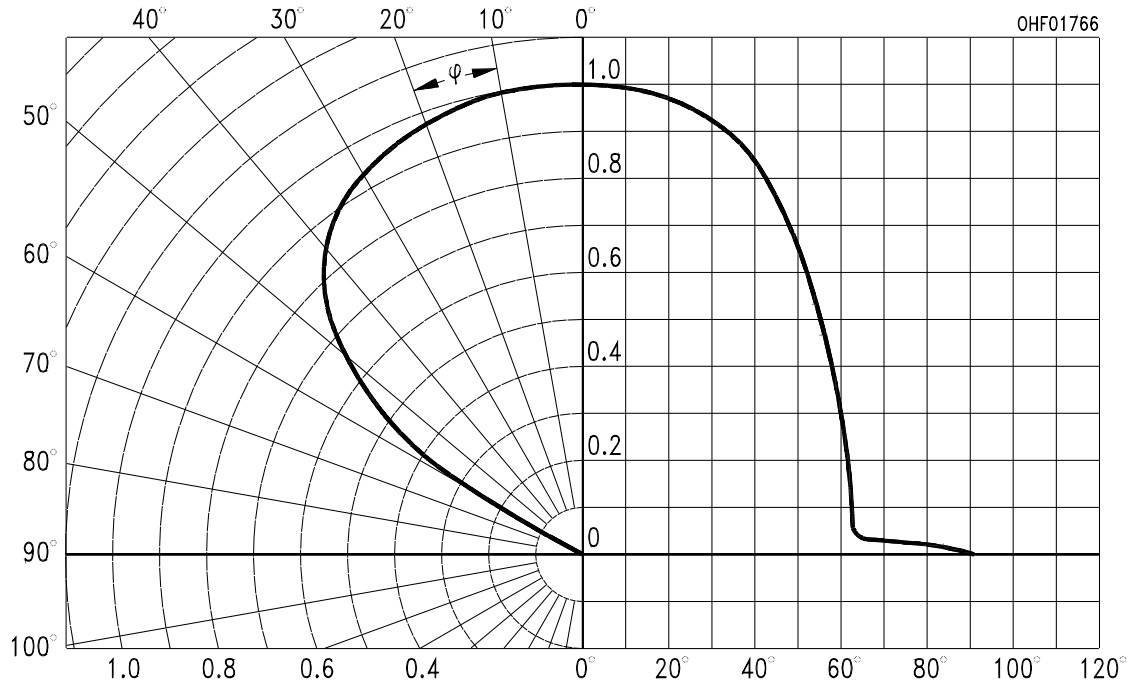

**Package Outline**

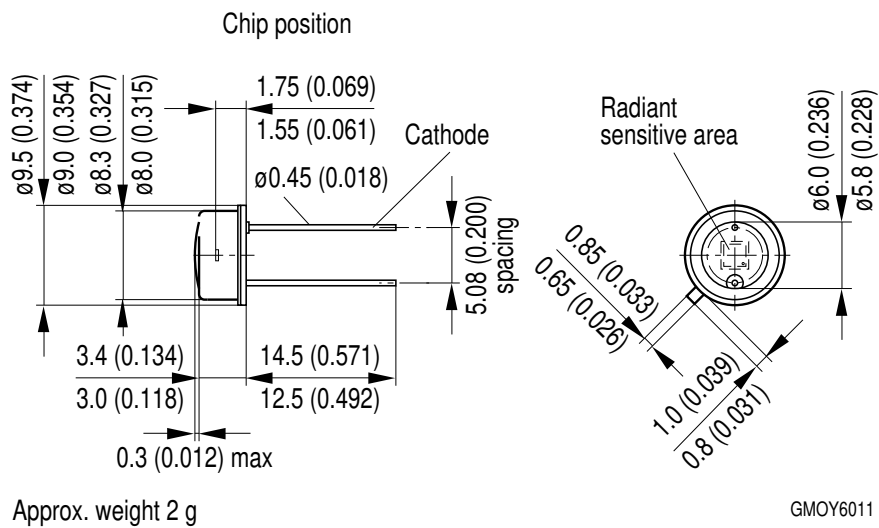

*Dimensions in mm (inch).*

**Package**


Metal Can (TO-39), hermetically sealed

**Approximate Weight:**

0.2 g

**TTW Soldering**

IEC-61760-1 TTW

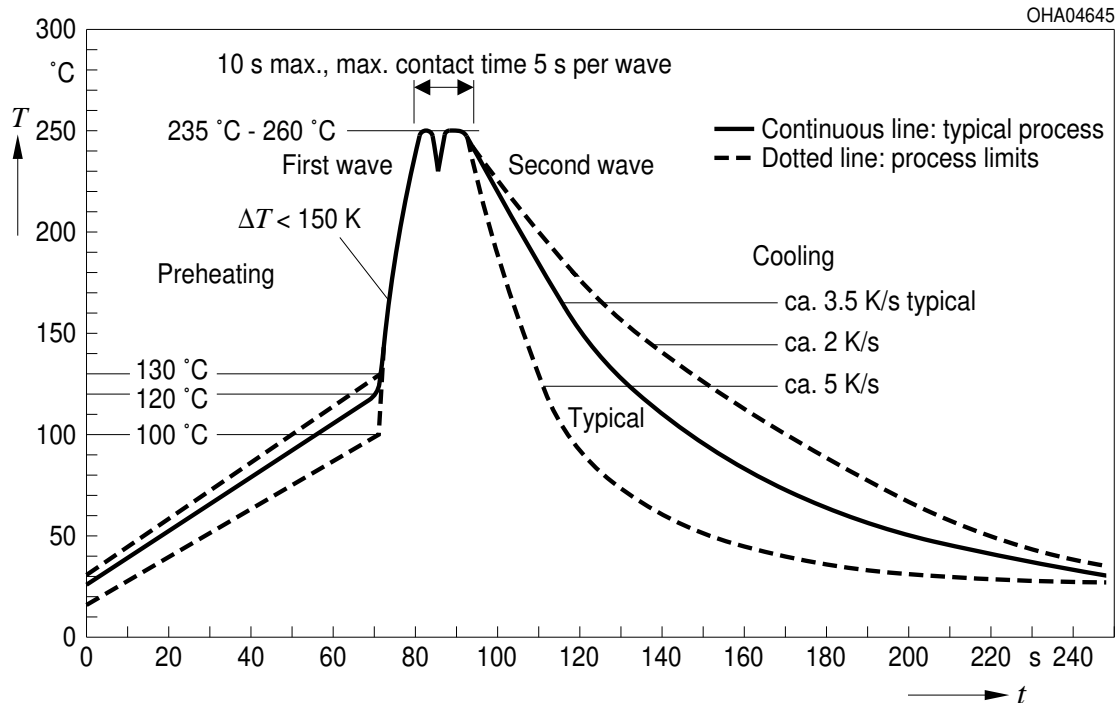**Disclaimer**

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

**Attention please!**

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version in the Internet.

**Packing**

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

**Components used in life-support devices or systems must be expressly authorized for such purpose!**

Critical components\* may only be used in life-support devices\*\* or systems with the express written approval of OSRAM OS.

\*) A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or the effectiveness of that device or system.

\*\*) Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health and the life of the user may be endangered.

**Glossary**

- <sup>1)</sup> **Typical Values:** Due to the special conditions of the manufacturing processes of LED, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.



**Published by OSRAM Opto Semiconductors GmbH**  
**Leibnizstraße 4, D-93055 Regensburg**  
**www.osram-os.com © All Rights Reserved.**

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。