



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



BU-7044-B-XX-*

(Test Lead: Dual Stackable Banana Plugs to Stackable .080" Pin Tip Probes)

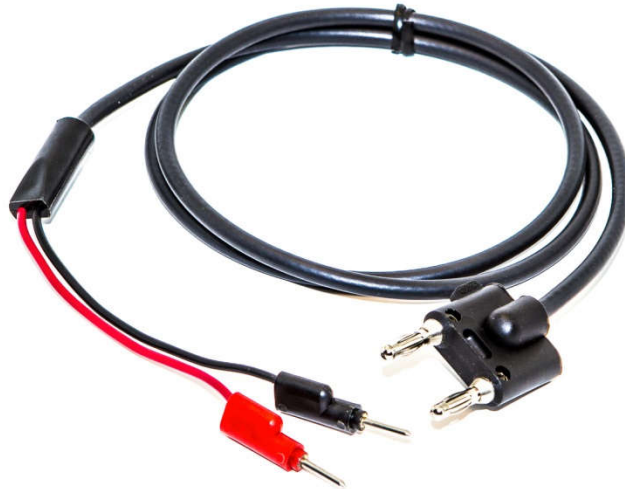

- The BU-7044-B-* is a test lead with dual stackable, 4mm banana plugs to .080" (2mm) stackable pin tip probes. The banana plugs mate with any standard 4mm banana jacks and are spaced at the industry standard .75" (19mm).
- Constructed with RG58/U Coax cable. Center conductor is 20 AWG (19x33) tinned copper and the shield is tinned copper braid (95% coverage). The overmold material is polypropylene. Banana plugs are nickel plated phosphor bronze. Pin tips are nickel plated brass.
- Length: The "XX" in the model number represents the overall length in inches. Standard lengths are: 12" (30cm), 24" (61cm) , 36"(.9m), 48" (1.2m) and 60" (1.5m)
- Color: The "*" in the model number represents the over-mold color. Available colors are: -0 Black, -2 Red,
- Ratings: 50 Ohms, Hands free testing to 500 VRMS
- RoHS Compliant