



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VDSL2 Vectoring Transformer



- VDSL2 Vectoring Transformer
- Compatible with Lantiq's Vinax V3 Chipset, Class AB Line Driver
- EN60950 Functional Isolation Compliant - 250Vrms
- RoHS-6 Compliant SMD Product
- Available on Tape and Reel

Electrical Specifications @ 25°C - Operating Temperatures @ -40°C to +85°C

Part Number	OCL Pri (2-7) tie (1+8), (3+6) 10kHz, 100mVrms (uH±10%)	Turns Ratio Pri:Sec 100kHz, 100mVrms ±2%	Leakage Inductance (2-7) tie (1+8) (4+5), (3+6) 1MHz, 100mVrms (uH, Max)	LB 12MHz (dB, Min)	LB 17MHz (dB, Min)	LB 30MHz (dB, Min)	C_iwp (2-7) tie (1+7), (2+8), (3+6), (4+5) 100kHz, 100mVrms (pF Max)	C_iws (4-5) tie (3+5), (4+6), (1+8), (2+7) 100kHz, 100mVrms (pF Max)
BX4290LNL	470	1.25	1.15	-41	-40	-33	75	75
* BX4290LNL	Rdc_p (2-7) tie (8+1) (OHMS Max)	Rdc_s (4-5) tie (6+3) (OHMS Max)	C_iw (2-4) tie (2+7) (4+5), (1+8), (3+6) 100kHz, 100mVrms (pF Max)	THD 25kHs 2.0Vrms (dB Min)	THD 25kHz 2.0Vrms @-40°C (dB typical)	Isolation Voltage Pri:Sec (Vac, 60Sec)	C_Pr Pri side 1 $f.res = \frac{1}{2 \pi \sqrt{(C_{Pr}) \cdot (L_s)}} \text{ in Hz}$ (pF Max)	
	3.0	1.5	100	-75	-65	1500	10	



Notes:

* Use this part number to order product to be shipped on Tape & Reel

Mechanical

Schematic

BX4290LNL, BX4290LNL

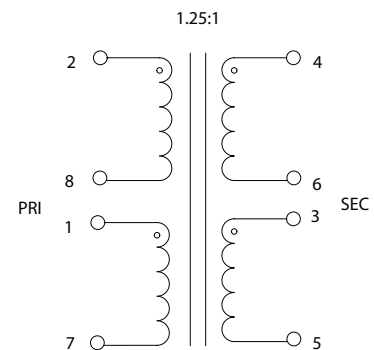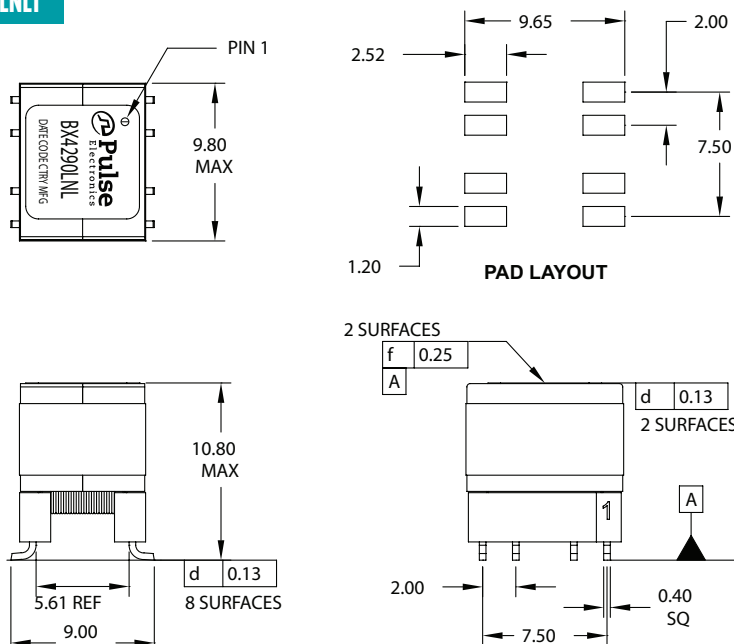

Dimensions: mm
Unless otherwise specified,
all tolerances are ± 0.1

VDSL2 Vectoring Transformer

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.

Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2013. Pulse Electronics, Inc. All rights reserved.