



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Damper diode fast, high-voltage

BY459-1500, BY459-1500S

FEATURES

- Low forward volt drop
- Fast switching
- Soft recovery characteristic
- High thermal cycling performance
- Low thermal resistance

SYMBOL

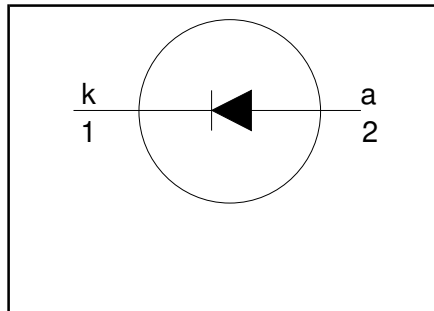

QUICK REFERENCE DATA

$V_R = 1500\text{ V}$
$V_F \leq 1.2\text{ V} / 1.25\text{ V}$
$I_{F(\text{peak})} = 12\text{ A}$ ($f = 48\text{ kHz}$)
$I_{F(\text{peak})} = 10\text{ A}$ ($f = 82\text{ kHz}$)
$I_{FSM} \leq 100\text{ A}$
$t_{rr} \leq 350\text{ ns} / 220\text{ ns}$

GENERAL DESCRIPTION


Glass-passivated double diffused rectifier diode featuring fast forward recovery and low forward recovery voltage. The device is intended for use in HDTV receivers and multi-sync monitor horizontal deflection circuits.

The BY459 series is supplied in the conventional leaded SOD59 (TO220AC) package.

PINNING

PIN	DESCRIPTION
1	cathode
2	anode
tab	cathode

SOD59 (TO220AC)

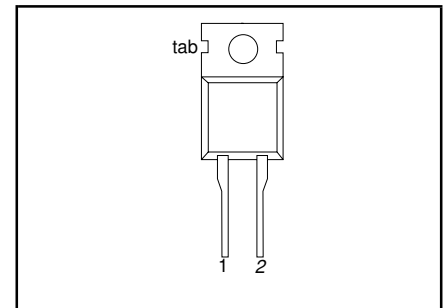

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.		UNIT
V _{RSM}	Peak non-repetitive reverse voltage	BY459 f = 48 kHz; f = 82 kHz; t = 100 μs t = 10 ms t = 8.3 ms sinusoidal; T _j = 150 °C prior to surge; with reapplied V _{RWM(max)}	-	1500		V
V _{RRM}	Peak repetitive reverse voltage		-	1500		V
V _{RWM}	Crest working reverse voltage		-	1300		V
I _{F(peak)}	Peak working forward current		-	-1500 12	-1500S -	A
			-	-	10	A
I _{FRM}	Peak repetitive forward current		-	100		A
I _{F(RMS)}	RMS forward current		-	30		A
I _{FSM}	Peak non-repetitive forward current		-	100		A
		-	110		A	
T _{stg}	Storage temperature	-40	150		°C	
T _j	Operating junction temperature	-	150		°C	

Damper diode fast, high-voltage

BY459-1500, BY459-1500S

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j-mb}$	Thermal resistance junction to mounting base	in free air	-	-	1.5	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient		-	60	-	K/W

STATIC CHARACTERISTICS

 $T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	TYP.		MAX.		UNIT
		BY459	1500	1500S	1500	1500S	
V_F	Forward voltage	$I_F = 6.5\text{ A}$	0.95	1.05	1.30	1.35	V
		$I_F = 6.5\text{ A}; T_j = 125\text{ }^{\circ}\text{C}$	0.85	0.95	1.20	1.25	V
I_R	Reverse current	$V_R = 1300\text{ V}$	-	250	-	250	μA
		$V_R = 1300\text{ V}; T_j = 125\text{ }^{\circ}\text{C}$	-	1	-	1	mA







DYNAMIC CHARACTERISTICS


 $T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	TYP.		MAX.		UNIT
		BY459	1500	1500S	1500	1500S	
t_{rr}	Reverse recovery time	$I_F = 1\text{ A}, V_R \geq 30\text{ V};$	0.25	0.17	0.35	0.22	μs
Q_s	Reverse recovery charge	$I_F = 2\text{ A}, -di_F/dt = 20\text{ A}/\mu\text{s}$	2.0	0.70	3.0	0.95	μC
V_{fr}	Peak forward recovery voltage	$I_F = 6.5\text{ A}, di_F/dt = 50\text{ A}/\mu\text{s}$	8.0	11.0	14.0	19.0	V
t_{fr}	Forward recovery time	$I_F = 6.5\text{ A}, di_F/dt = 50\text{ A}/\mu\text{s}$	170	200	250	300	ns

Damper diode fast, high-voltage

BY459-1500, BY459-1500S

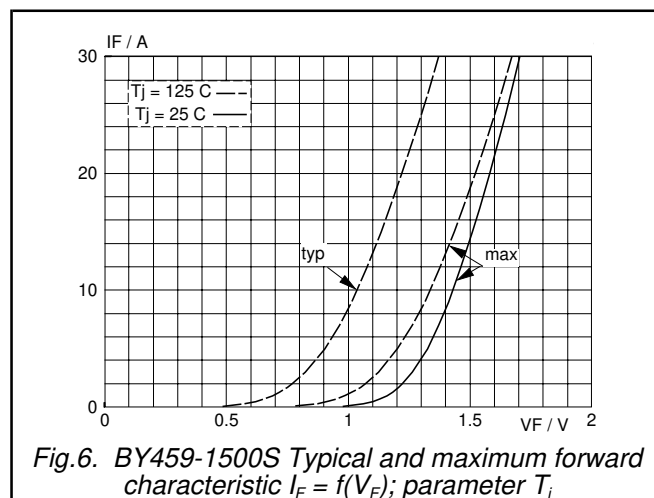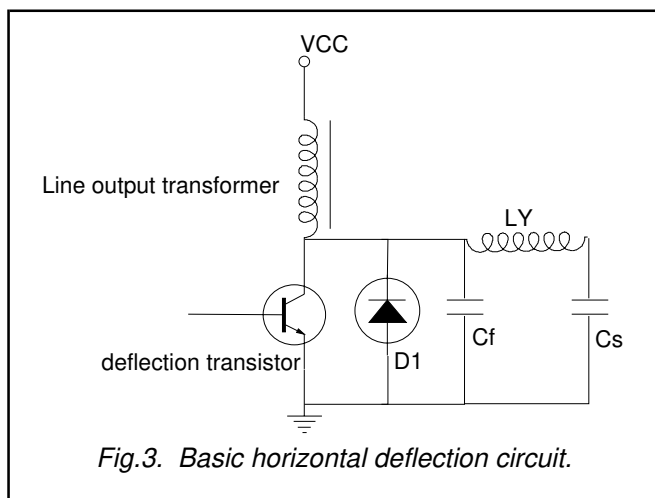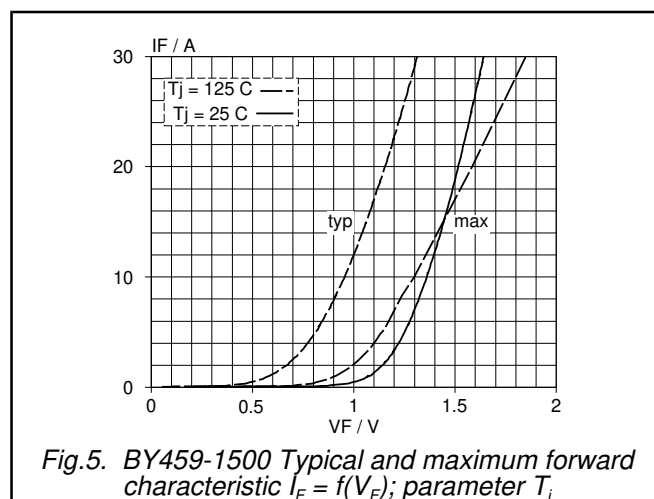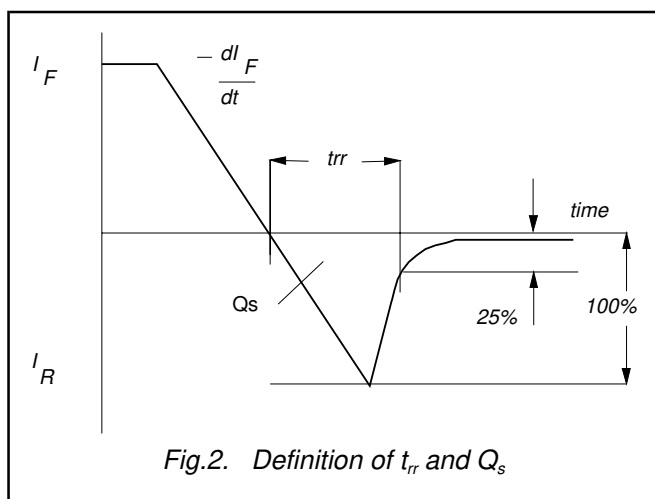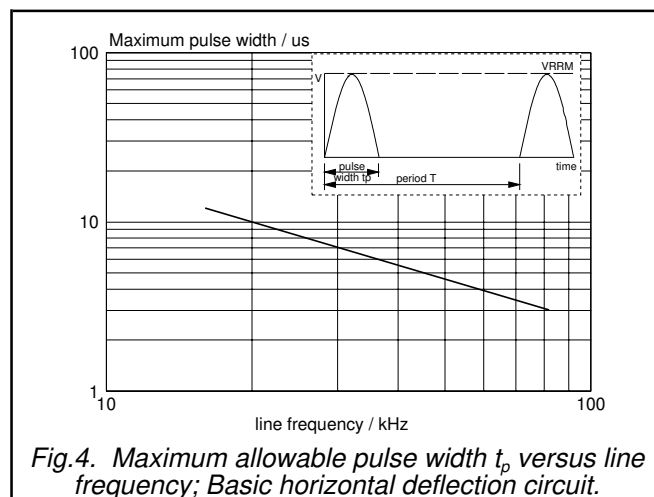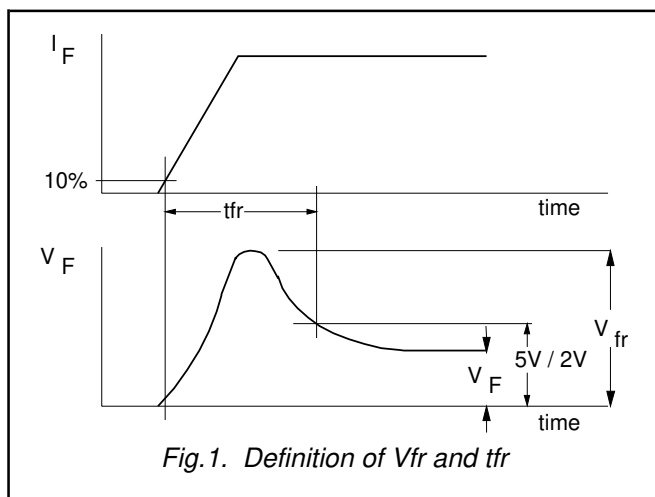

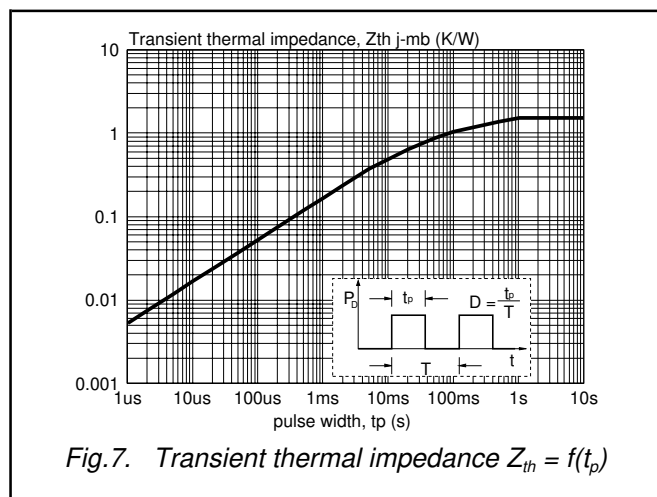**Damper diode
fast, high-voltage****BY459-1500, BY459-1500S**

Damper diode fast, high-voltage

BY459-1500, BY459-1500S

MECHANICAL DATA

Dimensions in mm

Net Mass: 2 g

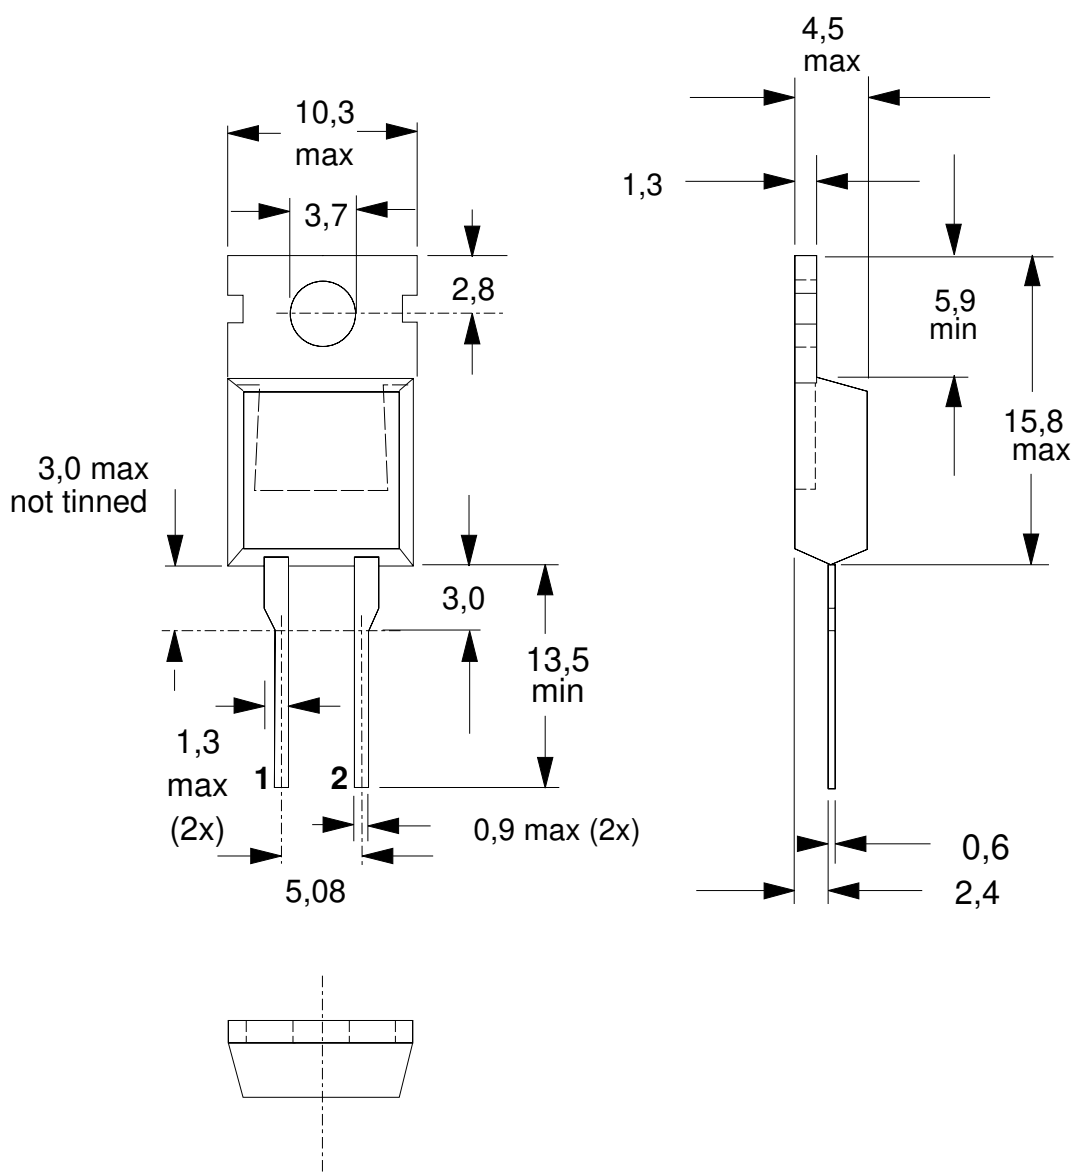


Fig.8. SOD59 (TO220AC). pin 1 connected to mounting base.

Notes

1. Refer to mounting instructions for TO220 envelopes.
2. Epoxy meets UL94 V0 at 1/8".

Damper diode
fast, high-voltage

BY459-1500, BY459-1500S

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 1998	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.