



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





User's Guide

C-20-1003FN

VFD

(Vacuum Fluorescent Character Display Module)

For product support, contact

New haven Display International
2511 Technology Drive #101
Elgin , IL 601 24
Tel: (847) 8 44-8795 Fax: (847) 8 44-8796

October 31, 2006

Vacuum Fluorescent Display Specification

PART NUMBER: **C-20-1003FN**

FEATURES: 9 Digits – Alphanumeric, with custom fixed segments

APPLICATION: Audio/Video- DVD

RATINGS: Below

Outer Dimensions	Panel Length	P.L.	110.2	mm	
	Panel Height	P.H.	20.5	mm	
	Panel Thickness	P.T.	6.1	mm	
Leads	Lead Pitch	L.P.	2.54	mm	
	Lead Out	-	SIL		
Character Size	Character Height	C.H.	-	mm	
	Character Width	C.W.	-	mm	
Item	Symbol	Min.	Recommended	Max.	Unit
Filament Voltage	Ef	3.51	3.90	4.29	Vac
Peak Grid Voltage	ec	-	24.0	27.0	Vp-p
Peak Anode Voltage	eb	-	24.0	27.0	Vp-p
Cut-off Bias	Ek	-	0	-	Vdc
Duty Cycle	Du	-	1/11	-	-
Pulse Width	tp	-	100	-	uS
Operating Temperature	Topr	-20	-	+ 70	C
Storage Temperature	Tstg	-55	-	+ 80	C
Color of Illumination	Green, Red				


C-20-1003FN

Electrical Characteristics

Item	Symbol	Test Condition	Min.	Typical	Max.	Unit
Filament Current	I _f -	E _f = 3.9 V _{ac} e _b = e _c = 0	99.0 -	110.0 -	121.0 -	mA _{ac} -
Anode Current	i _b / 3, 5, 7, 8, 10G i _b / 4, 6, 9G i _b / 2G i _b / 1G -	E _f = 3.9 V _{ac} e _b = 24.0 V _{p-p} e _c = 24.0 V _{p-p} D _u = 1/11 t _p = 100μs	- - - - -	4.0 5.0 7.0 15.0 -	8.0 10.0 14.0 30.0 -	mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p} -
Grid Current	i _c / 3, 5, 7, 8, 10G i _c / 4, 6, 9G i _c / 2G i _c / 1G -	(All segs are ON)	- - - - -	4.0 5.0 7.0 15.0 -	8.0 10.0 14.0 28.0 -	mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p} -
Luminance	L(G) L(R) -		350 (102) 70 (35) -	700 (204) 140 (70) -	- - -	cd/m ² /fL cd/m ² /fL -
Luminance Ratio	L _{min} /L _{max}		50	-	-	%
Grid Cut-off Voltage	E _{cco}	E _f = 3.9 V _{ac} E _b = 27.0 V _{dc}	-4.8	-	-	V _{dc}
Anode Cut-off Voltage	E _{bco}	E _f = 3.9 V _{ac} e _c = 27.0 V _{p-p} D _u = 1/10 T _p = 100μs	-4.8	-	-	V _{dc}

DRIVE MODE: Dynamic State


1: Outline Drawing (Unit: mm)

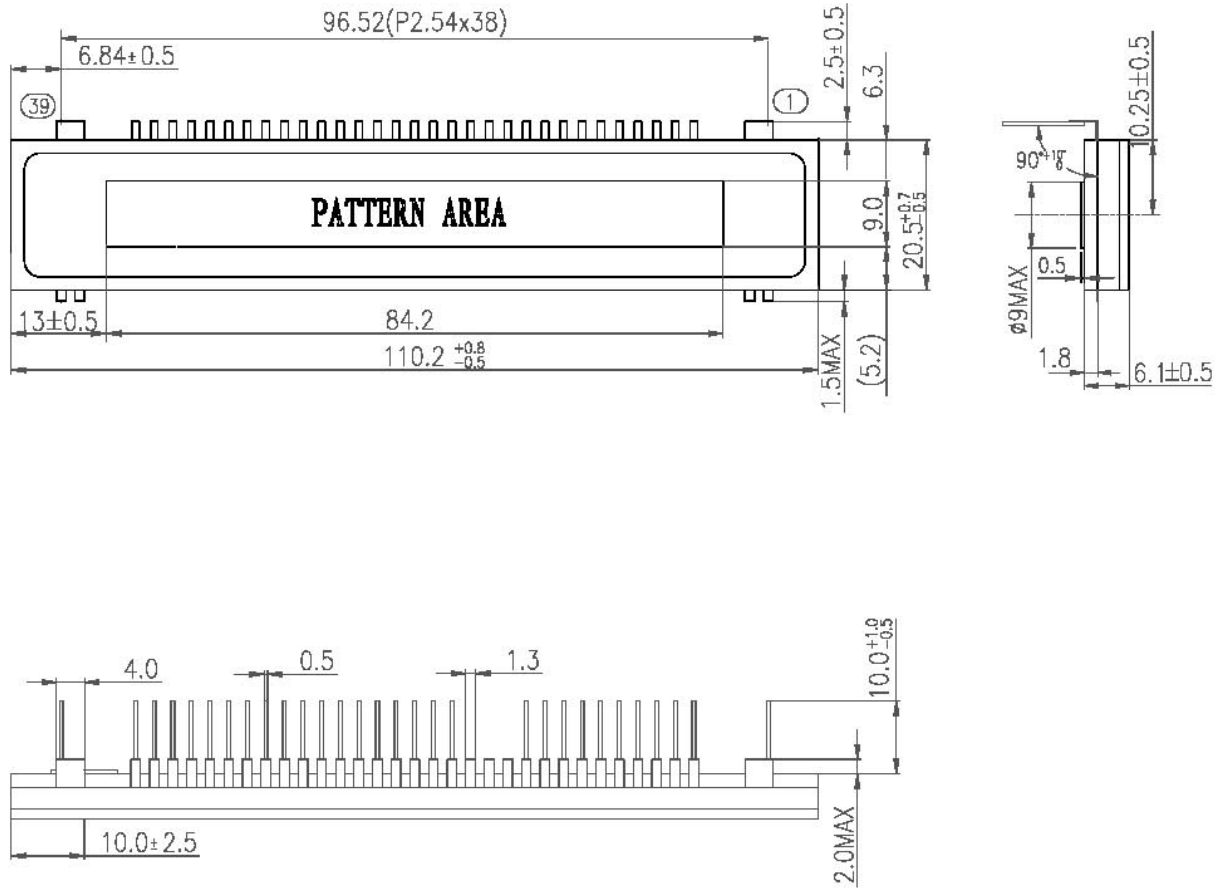


Pin Connections

Pin Number	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Connection	F	NX	NP	NP	1G	2G	3G	4G	5G	6G	7G	8G	9G	10G	NC	NC	NC	P1	P2	P3
Pin Number	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	
Connection	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	NP	NP	NX	F	

F: Filament P: Anode G: Grid NC: No Connection NP: No Pin NX:


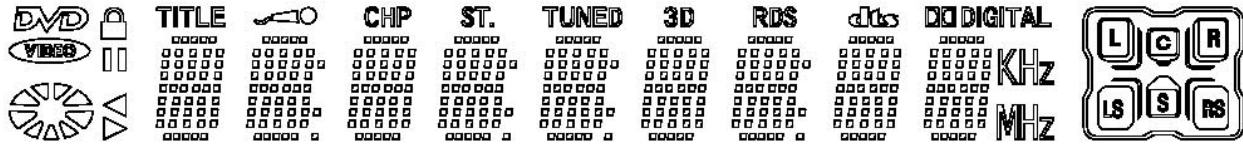





Red (x = 0.627, y = 0.371):

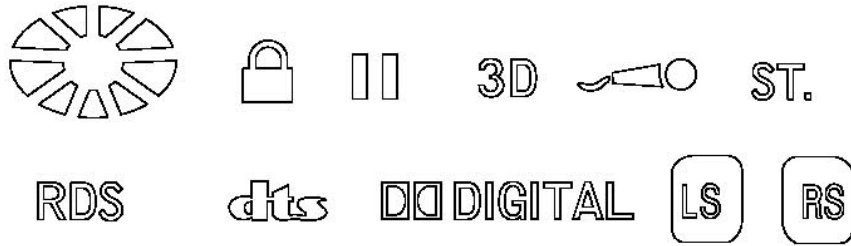



Green (x = 0.250, y = 0.440): Others

Negative Pattern:

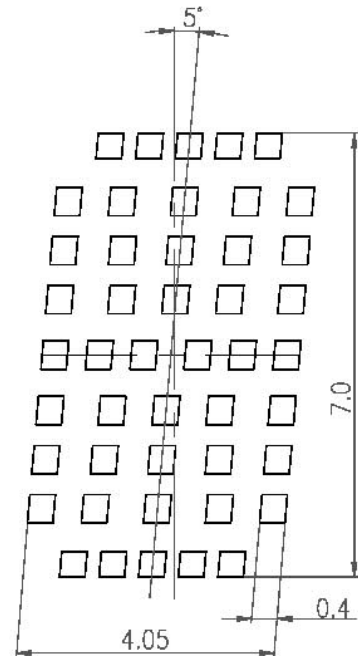

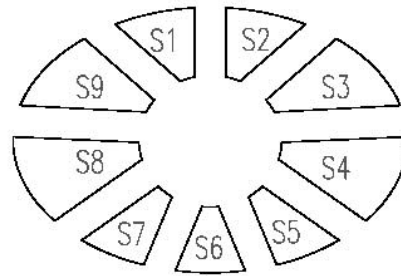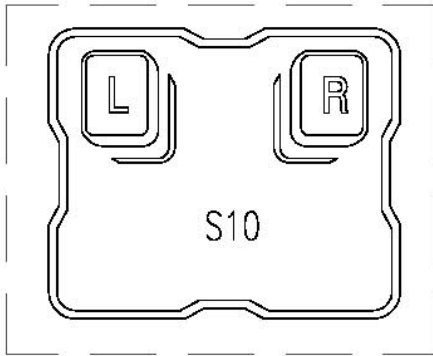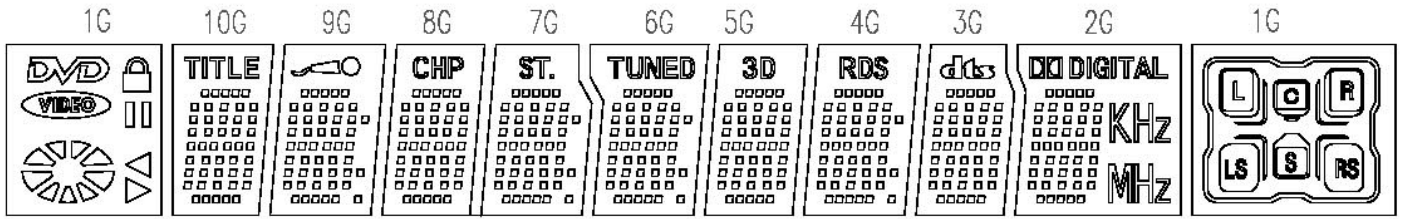

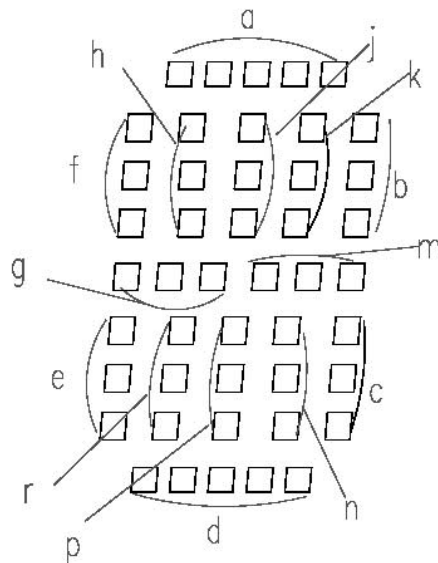


(1G)



(2G~10G)

(4G,6G,7G,9G)

	1G	2G	3G	4G	5G	6G	7G	8G	9G	10G
P1		DIGITAL	dts	RDS	3D	TUNED	ST.	CHP		TITLE
P2		a	a	a	a	a	a	a	a	a
P3		b	b	b	b	b	b	b	b	b
P4		f	f	f	f	f	f	f	f	f
P5		h	h	h	h	h	h	h	h	h
P6	S1	j	j	j	j	j	j	j	j	j
P7	S2	k	k	k	k	k	k	k	k	k
P8	S3	m	m	m	m	m	m	m	m	m
P9	S4	g	g	g	g	g	g	g	g	g
P10	S5	c	c	c	c	c	c	c	c	c
P11	S6	e	e	e	e	e	e	e	e	e
P12	S7	r	r	r	r	r	r	r	r	r
P13	S8	p	p	p	p	p	p	p	p	p
P14	S9	n	n	n	n	n	n	n	n	n
P15	S10	d	d	d	d	d	d	d	d	d
P16		KHz		col		col	col		col	
P17		MHz		Dp		Dp	Dp		Dp	
P18										