



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



User's Guide

C-33-1305

VFD

(Vacuum Fluorescent Character Display Module)

For product support, contact

New haven Display International
2511 Technology Drive #101
Elgin , IL 601 24
Tel: (847) 8 44-8795 Fax: (847) 8 44-8796

October 31, 2006

Vacuum Fluorescent Display Specification

PART NUMBER: C-33-1305

FEATURES: 7 Digits, Alphanumeric, with Icons – AUDIO

APPLICATION: Character Display (*Alphanumeric*)

RATINGS: Below


Outer Dimensions	Panel Length	P.L.	135.2	mm	
	Panel Height	P.H.	28.9	mm	
	Panel Thickness	P.T.	8.5	mm	
Leads	Lead Pitch	L.P.	2.5	mm	
	Lead Out	-	SIL		
Character Size	Character Height	C.H.	8.8	mm	
	Character Width	C.W.	5.5	mm	
Item	Symbol	Min.	Recommended	Max.	Unit
Filament Voltage	Ef	4.5	5.0	5.5	Vac
Peak Grid Voltage	ec	-	29.0	34.0	Vp-p
Peak Anode Voltage	eb	-	29.0	34.0	Vp-p
Cut-off Bias	Ek	-	-	-	-
Duty Cycle	Du	-	1/ 14	-	-
Pulse Width	tp	-	100	-	uS
Operating Temperature	Topr	-20	-	+ 70	C
Storage Temperature	Tstg	-55	-	+ 80	C
Color of Illumination	Green / Red				


* Life = 10,000hrs to half brightness

Electrical Characteristics

Item	Symbol	Test Condition	Min.	Typical	Max.	Unit
Filament Current	If -	Ef = 5.0 Vac eb = ec = 0	202.5 -	225.0 -	247.5 -	mAac -
Anode Current	ib/1,2,3,5,7G ib/6,8~12G ib/4G ib/13G -	Ef = 5.0 Vac eb = 29.0 Vp-p ec = 29.0 Vp-p Du = 1/14 tp = 100 uS	- - - - -	7.0 9.0 12.0 21.0 -	14.0 18.0 24.0 42.0 -	mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p}
Grid Current	Ic/1,3,5G Ic/2,6~12G Ic/4G Ic/13G -		- - - - -	7.0 12.0 16.0 23.0 -	14.0 24.0 32.0 46.0 -	mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p} mA _{p-p}
Luminance	L(G) L(R) -		350 (102) 35 (10) -	700 (204) 70 (20) -	- - - -	cd/m ² (fL) cd/m ² (fL) cd/m ² (fL)
Luminance Ratio	Lmin/Lmax		50	-	-	%
Grid Cut-off Voltage	Ecco	Ef = 5.0 Vac Eb = 29.0 Vdc	-6.5	-	-	Vdc
Anode Cut-off Voltage	Ebco	Ef = 5.0 Vac Ec = 29.0 Vp-p Du = 1/14 tp = 100 uS	-6.5	-	-	Vdc

Drive Mode: Dynamic state

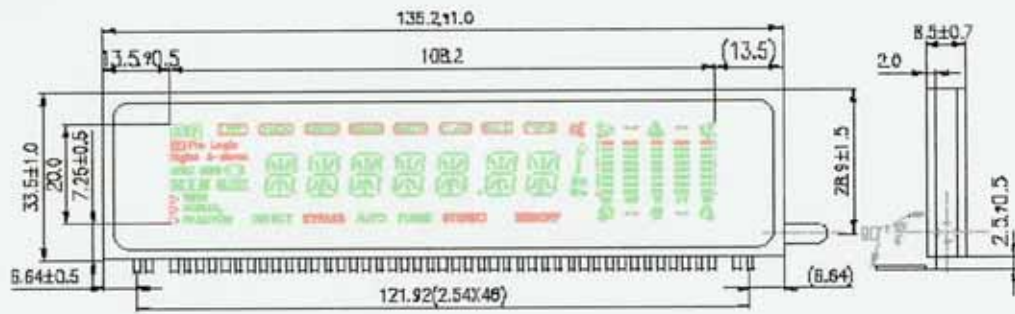


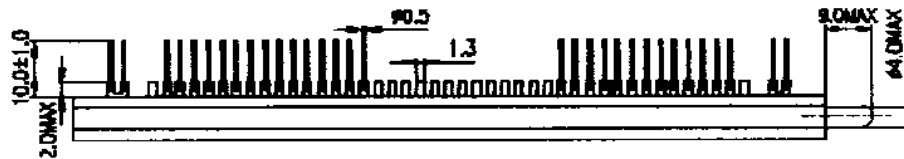

PINOUT CONNECTIONS

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
Conn.	F	F	NP	NC	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15
Pin No.	20-32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	
Conn.	NC	13G	12G	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G	NC	NP	F	F	

F: Filament G: Grid P: Anode NC: No Connect NP: No Pin

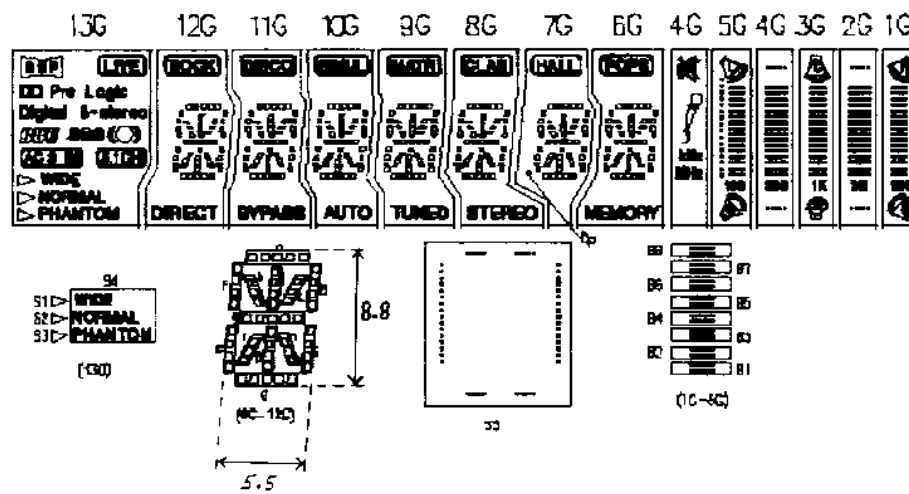

	13G	12G	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G
P1		a	a	a	a	a	a	a	a	B8	B8	B8	B8
P2		h	h	h	h	h	h	h	h	B7	B7	B7	B7
P3	Pre Light	i	i	i	i	i	i	i	i	B6	B6	B6	B6
P4	Digital	k	k	k	k	k	k	k	k	B5	B5	B5	B5
P5	B-Alert	f	f	f	f	f	f	f	f	B4	B4	B4	B4
P6		b	b	b	b	b	b	b	b	B3	B3	B3	B3
P7		g	g	g	g	g	g	g	g	B2	B2	B2	B2
P8		e	e	e	e	e	e	e	e	B1	B1	B1	B1
P9		c	c	c	c	c	c	c	c				
P10	S3	r	r	r	r	r	r	r	r	S5	S5	/	S5
P11	S2	p	p	p	p	p	p	p				/	
P12	S1	n	n	n	n	n	n	n				/	
P13	S4	d	d	d	d	d	d	d	d	/	/	/	/
P14	/	DIRECT	SYSTEM	AUTO	TUNED	STEREO	Dp	MEMORY	/	/	/	/	/
P15													