



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## EVA-M

~25° medium beam


### TECHNICAL SPECIFICATIONS:

Dimensions	Ø 35 mm
Height	16.4 mm
Fastening	glue
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	5.8 kg
Quantity in Box	540 pcs
ROHS compliant	yes ⓘ



### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
EVA-M	Lens	PMMA	clear

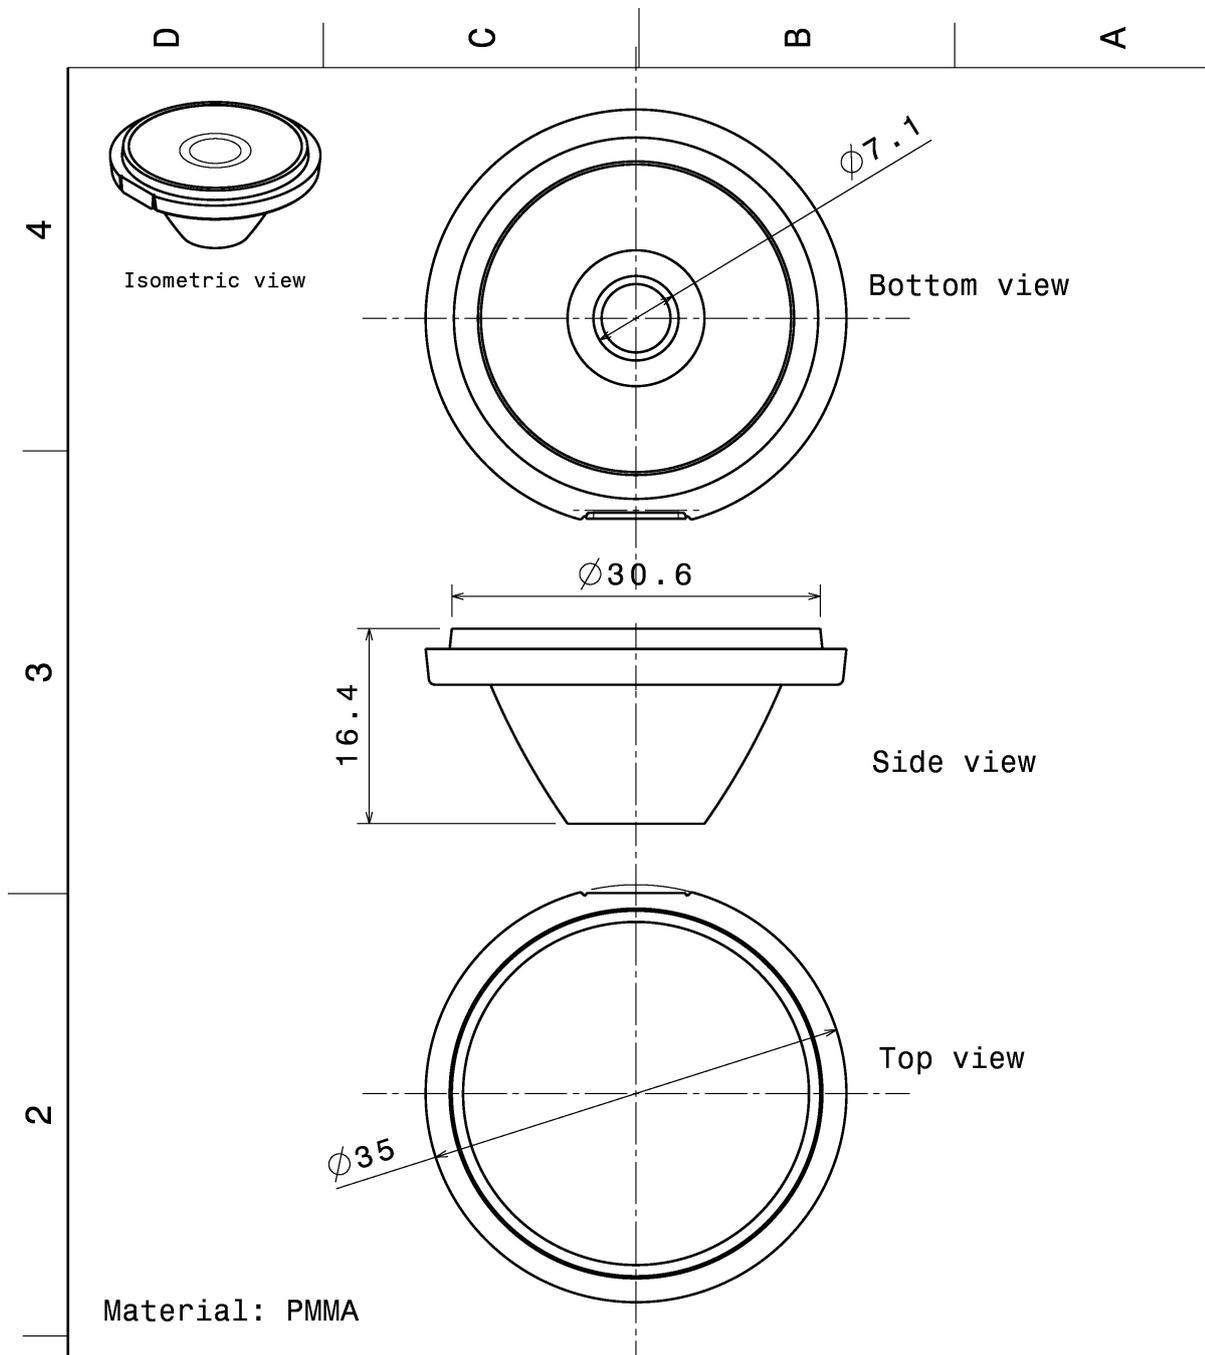



Material: PMMA

This drawing is our property. It can't be reproduced or communicated without our written agreement.		<b>LEDiL</b>		Ledil Oy Joensuunkatu 13 FIN-24100 SALO Finland	
DRAWING TITLE		Datasheet Eva Medium Lens			
DRAWN BY PV	DATE 05.09.2008	SIZE A4	DRAWING NUMBER C10685		REV 1.0
CHECKED BY hh	DATE 04.09.2008	SCALE 2:1	WEIGHT (g)	SHEET 1/1	
DESIGNED BY HH	DATE 26.08.2008				

**PHOTOMETRIC DATA (MEASURED):**



**CITIZEN**

LED            CLU LES 4.2mm (HI-Ver.3)  
FWHM         22.0°  
Efficiency     89 %  
Peak intensity 4.200 cd/lm  
Required components:

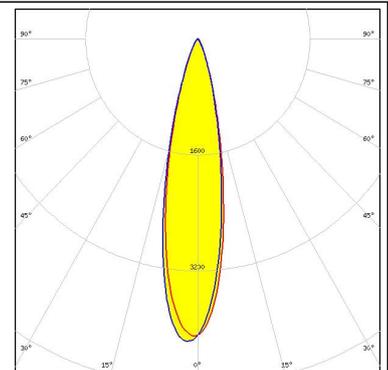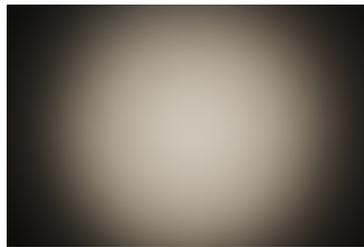


**CREE** ⇄

LED            MC-E  
FWHM         22.0°  
Efficiency     89 %  
Peak intensity 3.000 cd/lm  
Required components:

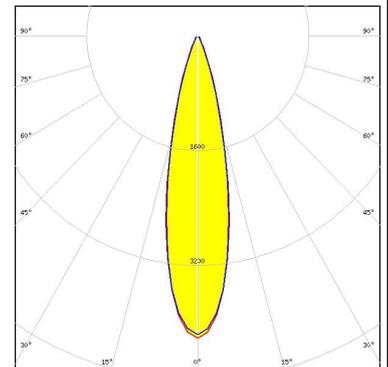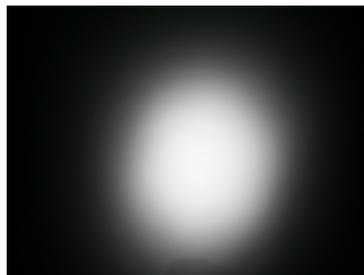

**CREE** ⇄

LED            MHB-A/B  
FWHM         25.0°  
Efficiency     82 %  
Peak intensity 3.630 cd/lm  
Required components:

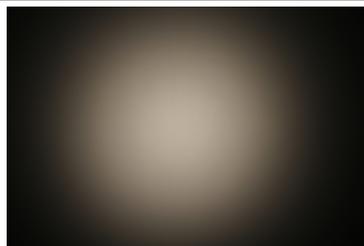

**CREE** ⇄

LED            XHP35 HI  
FWHM         28.0°  
Efficiency     78 %  
Peak intensity 2.300 cd/lm  
Required components:



### PHOTOMETRIC DATA (MEASURED):

#### CREE

LED XM-L  
FWHM 24.0°  
Efficiency 88 %  
Peak intensity cd/lm  
Required components:


#### CREE

LED XP-G2  
FWHM 24.0°  
Efficiency 88 %  
Peak intensity 4.200 cd/lm  
Required components:





#### CREE

LED XT-E  
FWHM 24.0°  
Efficiency %  
Peak intensity 3.700 cd/lm  
Required components:

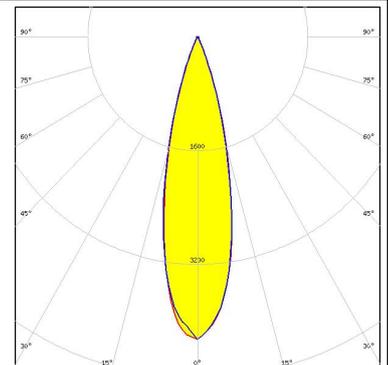

#### LUMILEDS

LED LUXEON 5050  
FWHM 25.0°  
Efficiency 85 %  
Peak intensity 3.300 cd/lm  
Required components:

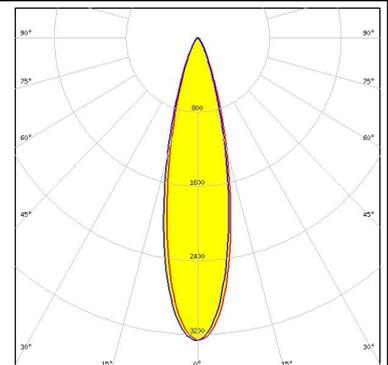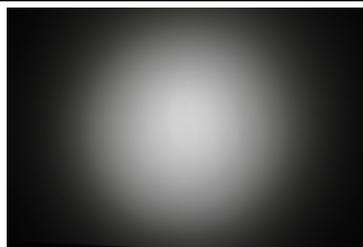


#### PHOTOMETRIC DATA (MEASURED):

##### LUMILEDS

LED LUXEON M/MX  
 FWHM 26.0°  
 Efficiency 89 %  
 Peak intensity 2.800 cd/lm  
 Required components:



##### LUMILEDS

LED LUXEON MZ  
 FWHM 24.0°  
 Efficiency 87 %  
 Peak intensity 4.200 cd/lm  
 Required components:

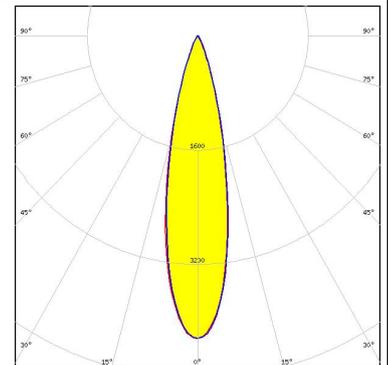


##### NICHIA

LED NS9x383  
 FWHM 24.0°  
 Efficiency 88 %  
 Peak intensity 3.700 cd/lm  
 Required components:

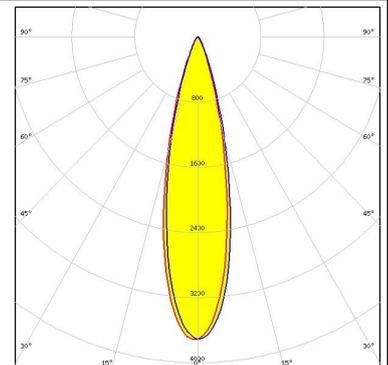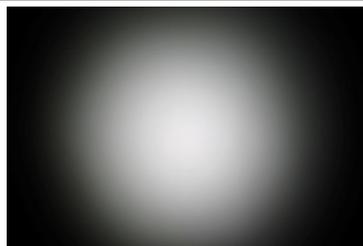

##### NICHIA


LED NSMx286M  
 FWHM 26.0°  
 Efficiency 88 %  
 Peak intensity 3.000 cd/lm  
 Required components:

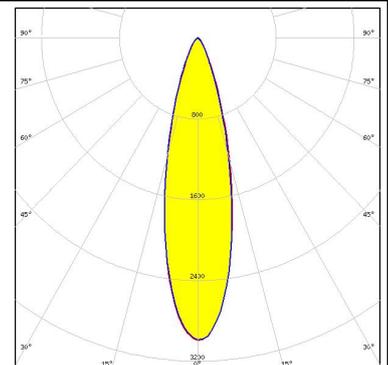

### PHOTOMETRIC DATA (MEASURED):

**OSRAM**  
Opto Semiconductors

LED Duris S8  
FWHM 25.0°  
Efficiency 86 %  
Peak intensity 4.000 cd/lm  
Required components:

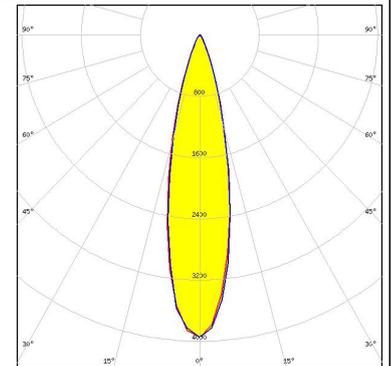


**SEOL**  
SEOUL SEMICONDUCTOR

LED Z8Y15  
FWHM 24.0°  
Efficiency 83 %  
Peak intensity 4.270 cd/lm  
Required components:



**SEOL**  
SEOUL SEMICONDUCTOR

LED Z8Y19  
FWHM 24.0°  
Efficiency 84 %  
Peak intensity 4.230 cd/lm  
Required components:

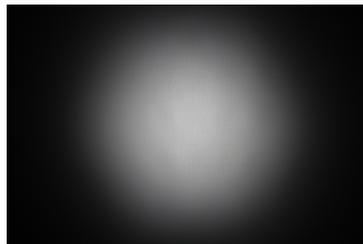

### PHOTOMETRIC DATA (SIMULATED):

#### CREE


LED XM-L HVW  
FWHM 26.0°  
Efficiency %  
Peak intensity cd/lm  
Required components:

#### LUMILEDS

LED LUXEON 5258  
FWHM 24.0°  
Efficiency 93 %  
Peak intensity 4.300 cd/lm  
Required components:

#### OSRAM

LED OSCONIQ P 7070  
FWHM 25.0°  
Efficiency 93 %  
Peak intensity 3.820 cd/lm  
Required components:

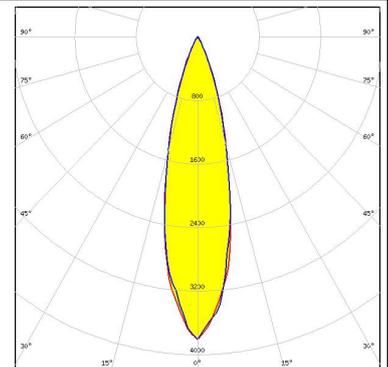



### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)