



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



STRADA-2X2-CY

Beam for canopy lighting with batwing light distribution. Suitable for symmetrical tunnel lighting.


TECHNICAL SPECIFICATIONS:



Dimensions	50.0 mm
Height	6 mm
Fastening	screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	6.2 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
STRADA-2X2-CY	Lens array	PMMA	clear

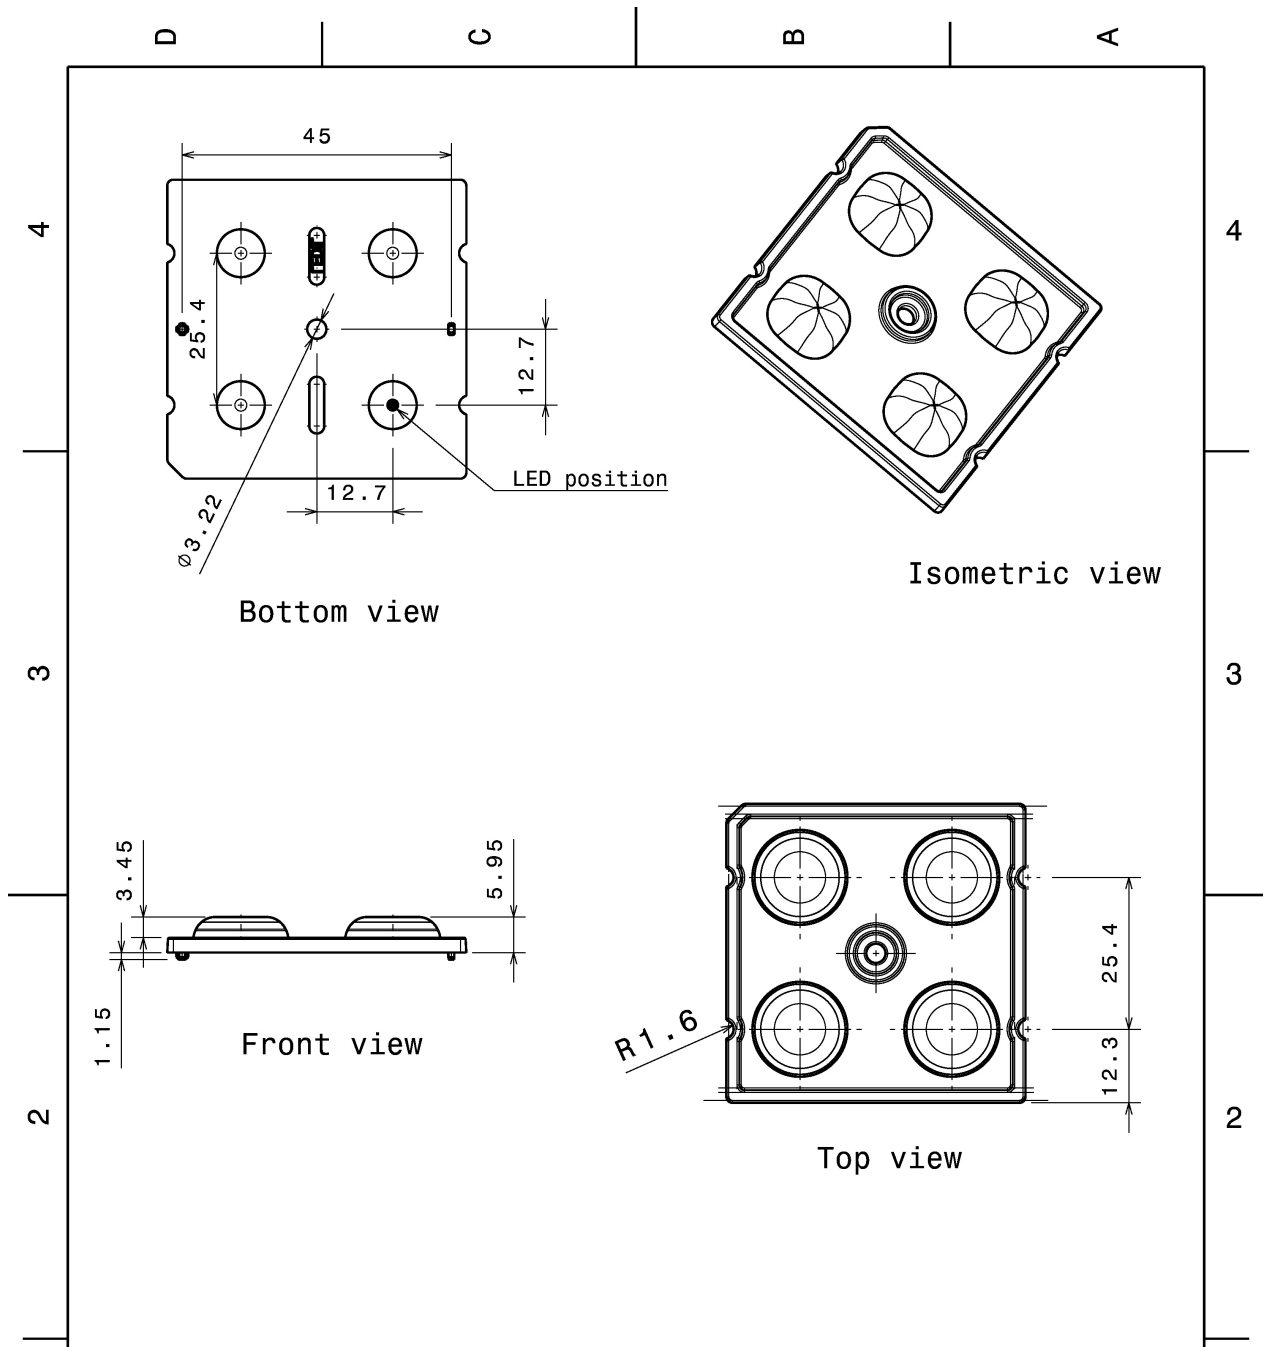


Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L		 Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
THIRD ANGLE PROJECTION: 		DRAWING TITLE C13499_STRADA-2X2-CY	
This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.		SIZE A4	PART NUMBER -
SCALE 1:1		WEIGHT -	SHEET 1/1

PHOTOMETRIC DATA (MEASURED):


bridgelux

LED SMD 5050
FWHM 120.0 + 119.0°
Efficiency 94 %
Peak intensity 0.320 cd/lm
Required components:

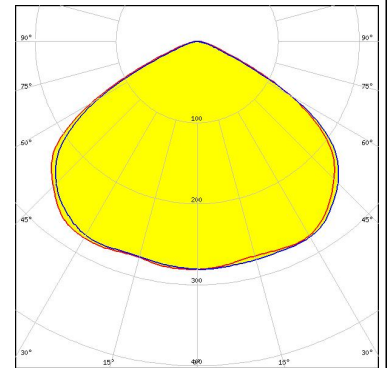



CREE

LED XD16
FWHM 132.0 + 130.0°
Efficiency 94 %
Peak intensity 0.360 cd/lm
Required components:

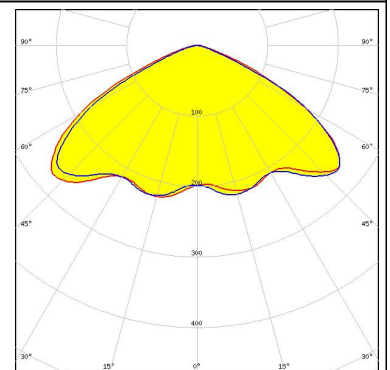



CREE

LED XD16 2x2 cluster
FWHM 125.0 + 124.0°
Efficiency 94 %
Peak intensity 0.340 cd/lm
Required components:

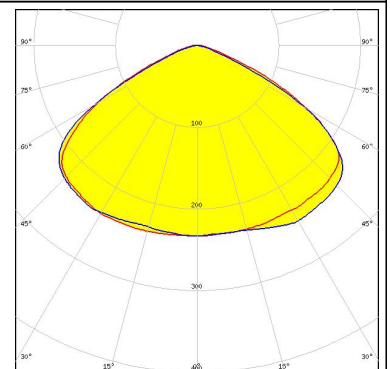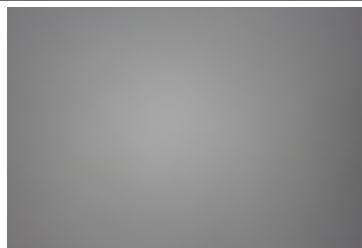

CREE


LED XM-L
FWHM 126.0°
Efficiency 94 %
Peak intensity 0.320 cd/lm
Required components:

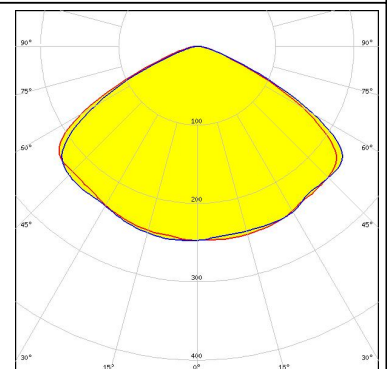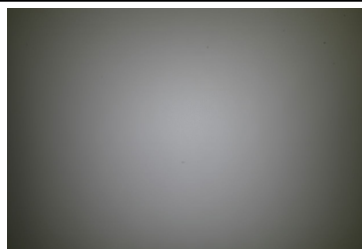



PHOTOMETRIC DATA (MEASURED):





LED XM-L2
FWHM 121.0°
Efficiency 94 %
Peak intensity 0.300 cd/lm
Required components:

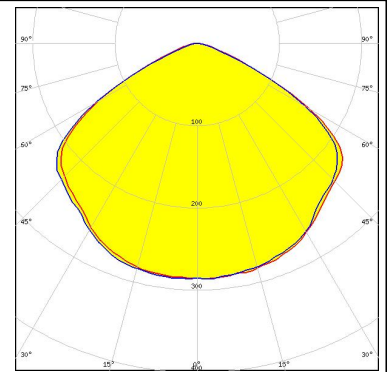



LED XP-G
FWHM 131.0°
Efficiency 94 %
Peak intensity 0.320 cd/lm
Required components:

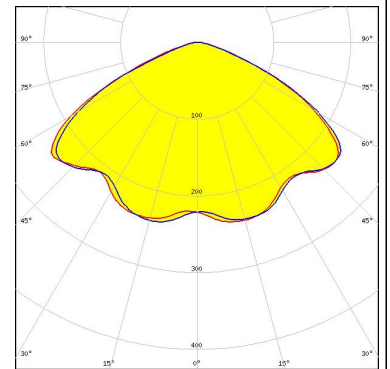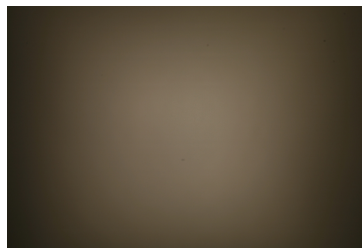

LED XP-G2
FWHM 129.0°
Efficiency 94 %
Peak intensity 0.340 cd/lm
Required components:

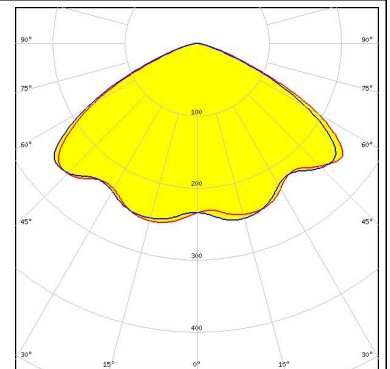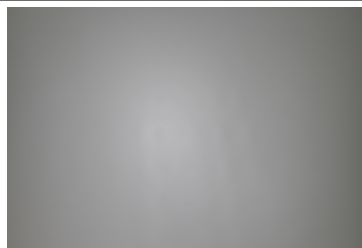


LED XP-G3
FWHM 131.0 + 132.0°
Efficiency 94 %
Peak intensity 0.330 cd/lm
Required components:

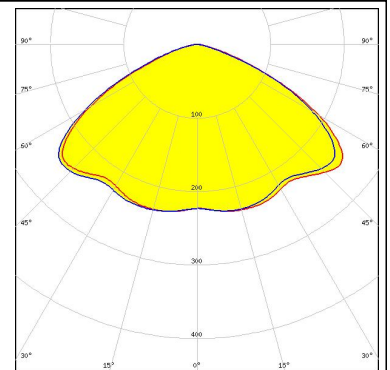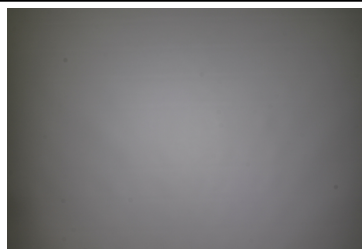

PHOTOMETRIC DATA (MEASURED):


CREE 

LED XP-L
FWHM 131.0°
Efficiency 94 %
Peak intensity 0.320 cd/lm
Required components:

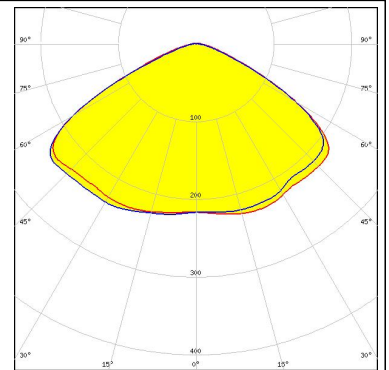



CREE 

LED XP-L HI
FWHM 127.0°
Efficiency 94 %
Peak intensity 0.330 cd/lm
Required components:

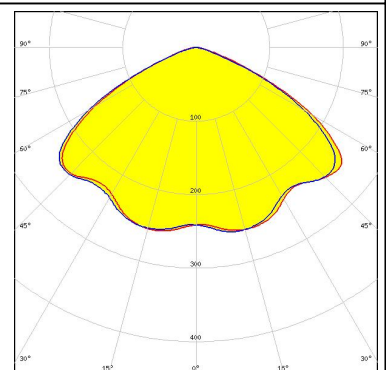


CREE 

LED XP-L2
FWHM 127.0°
Efficiency 94 %
Peak intensity 0.300 cd/lm
Required components:

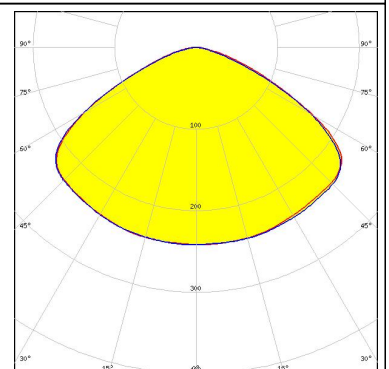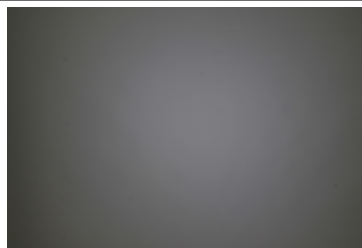

CREE 



LED XT-E
FWHM 136.0°
Efficiency 94 %
Peak intensity 0.300 cd/lm
Required components:

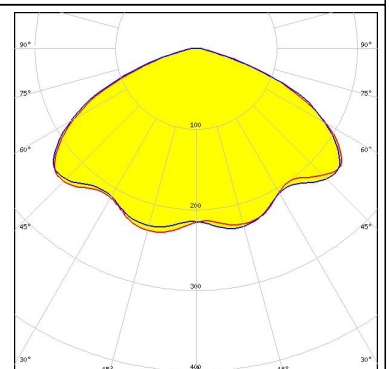

PHOTOMETRIC DATA (MEASURED):


LG Innotek

LED H35C1 (LEMWA33)
FWHM 126.0°
Efficiency 94 %
Peak intensity 0.340 cd/lm
Required components:

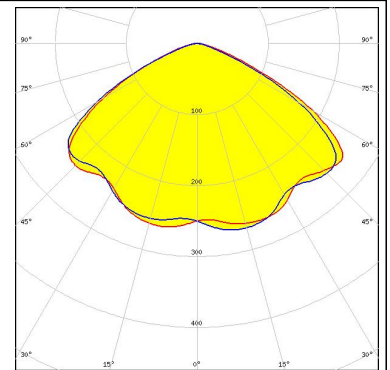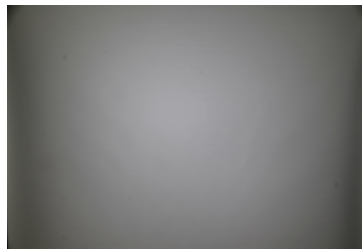


LUMILEDS

LED LUXEON 5050
FWHM 121.0°
Efficiency 94 %
Peak intensity 0.320 cd/lm
Required components:

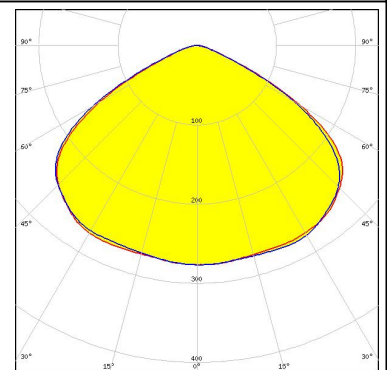



LUMILEDS

LED LUXEON MZ
FWHM 123.0°
Efficiency 94 %
Peak intensity 0.350 cd/lm
Required components:

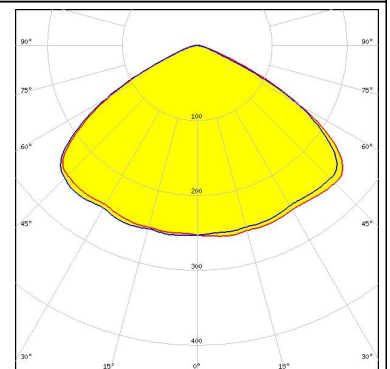

LUMILEDS


LED LUXEON Q
FWHM 134.0°
Efficiency 94 %
Peak intensity 0.300 cd/lm
Required components:

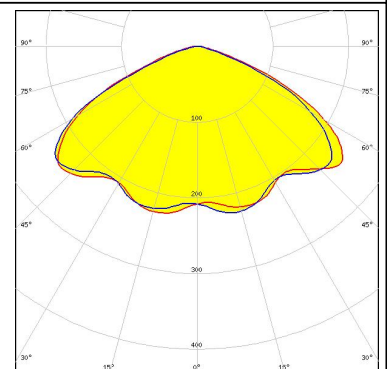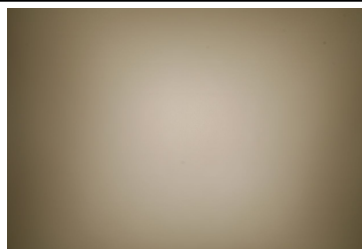

PHOTOMETRIC DATA (MEASURED):



LUMILEDS

LED LUXEON T
FWHM 127.0°
Efficiency 94 %
Peak intensity 0.340 cd/lm
Required components:

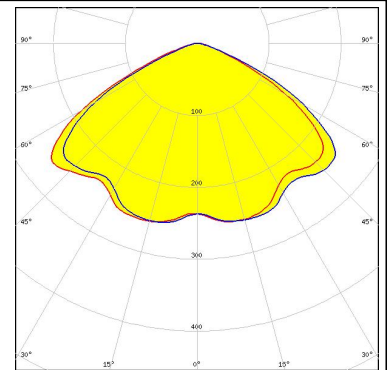



LUMILEDS

LED LUXEON TX
FWHM 123.0°
Efficiency 94 %
Peak intensity 0.330 cd/lm
Required components:

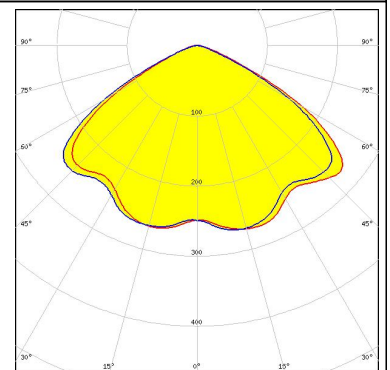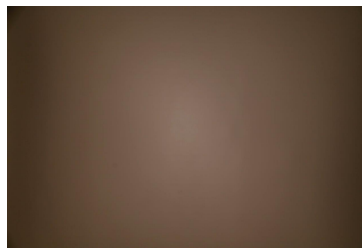


LUMILEDS

LED LUXEON V
FWHM 125.0 + 123.0°
Efficiency 94 %
Peak intensity 0.310 cd/lm
Required components:

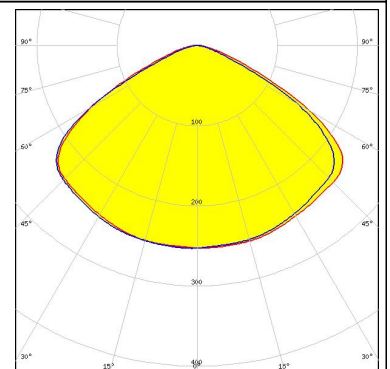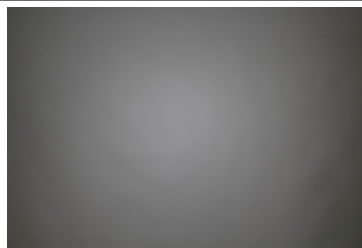

NICHIA


LED NVSW3x9A
FWHM 129.0 + 128.0°
Efficiency 94 %
Peak intensity 0.340 cd/lm
Required components:

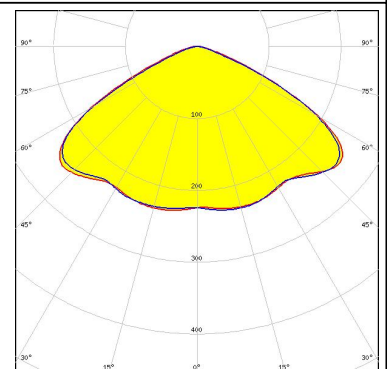


PHOTOMETRIC DATA (MEASURED):





LED NVSxE21A
FWHM 125.0°
Efficiency 94 %
Peak intensity 0.390 cd/lm
Required components:

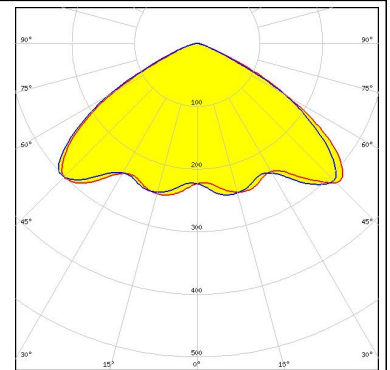


LED Oslon Square Gen3
FWHM 128.0 + 127.0°
Efficiency 94 %
Peak intensity 0.360 cd/lm
Required components:

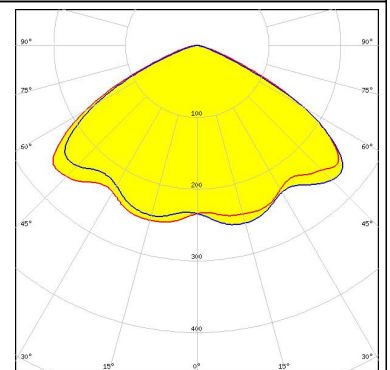

LED Oslon Square PC
FWHM 122.0°
Efficiency 94 %
Peak intensity 0.330 cd/lm
Required components:

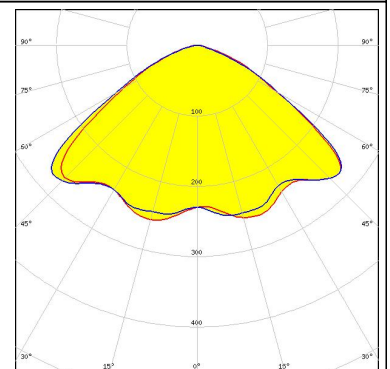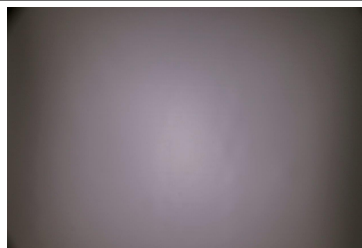


LED Fortimo FastFlex LED board 2x8 DA G4
FWHM 125.0°
Efficiency 94 %
Peak intensity 0.360 cd/lm
Required components:

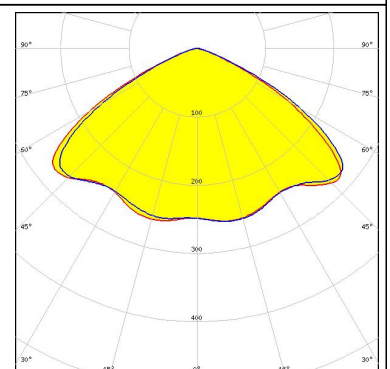

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo FastFlex LED board 2x8 DAX G4
FWHM 131.0°
Efficiency 94 %
Peak intensity 0.330 cd/lm
Required components:

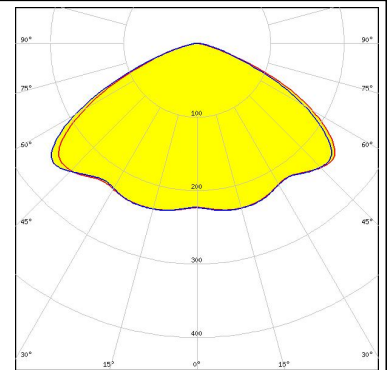



SAMSUNG

LED LH351B
FWHM 126.0°
Efficiency 94 %
Peak intensity 0.340 cd/lm
Required components:

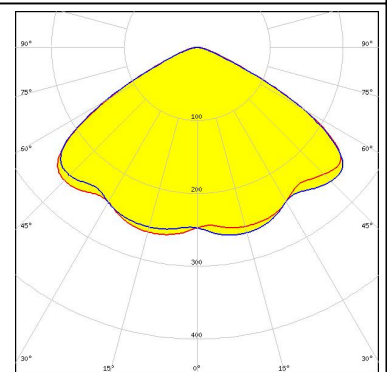



SAMSUNG

LED LH351C
FWHM 123.0°
Efficiency 94 %
Peak intensity 0.350 cd/lm
Required components:

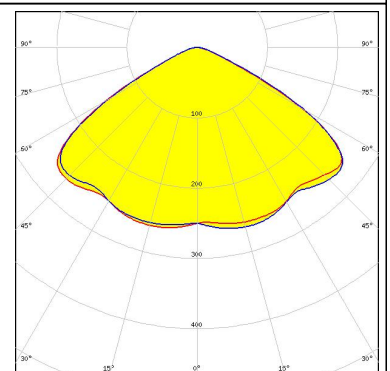
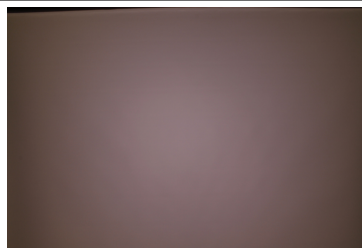

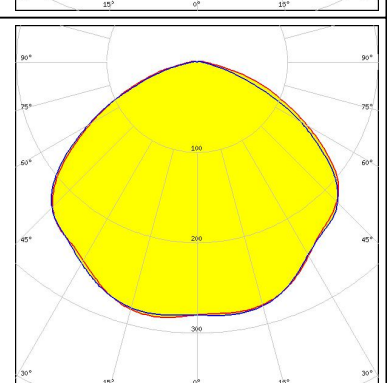
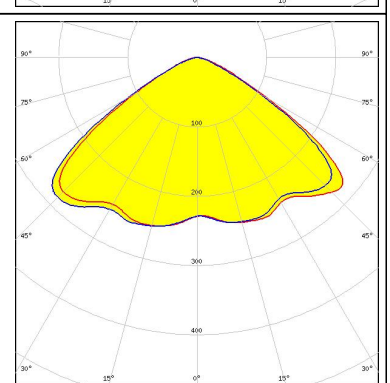


SAMSUNG

LED LH508A
FWHM 122.0°
Efficiency 94 %
Peak intensity 0.320 cd/lm
Required components:

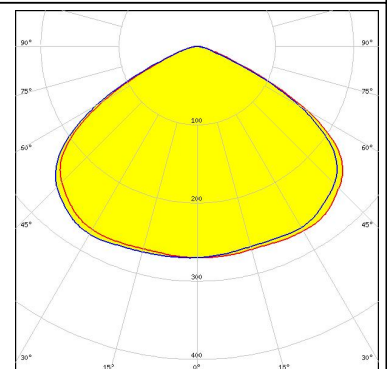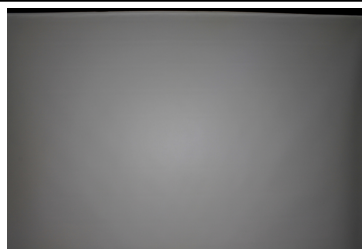


PHOTOMETRIC DATA (MEASURED):
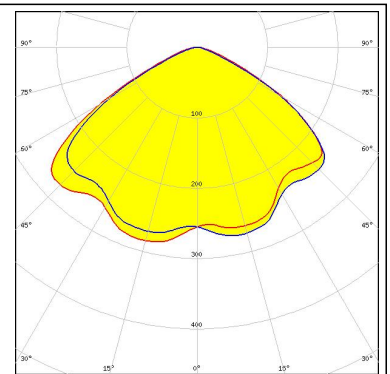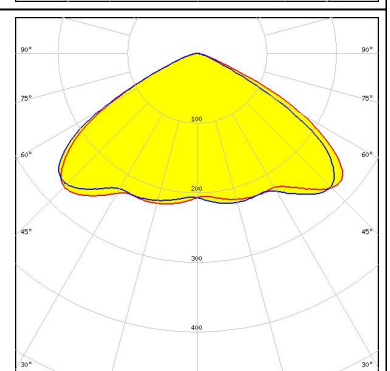
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED Z5M1/Z5M2 FWHM 122.0° Efficiency 94 % Peak intensity 0.400 cd/lm Required components:</p>		
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED Z8Y22 FWHM 127.0 + 124.0° Efficiency 94 % Peak intensity 0.380 cd/lm Required components:</p>		
<p>TOSHIBA Leading Innovation >>></p> <p>LED TL1L3 FWHM 118.0° Efficiency 94 % Peak intensity 0.290 cd/lm Required components:</p>		
<p>TOSHIBA Leading Innovation >>></p> <p>LED TL1L4 FWHM 119.0° Efficiency 91 % Peak intensity 0.360 cd/lm Required components:</p>		

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM 119.0 + 117.0°
Efficiency 94 %
Peak intensity 0.350 cd/lm
Required components:

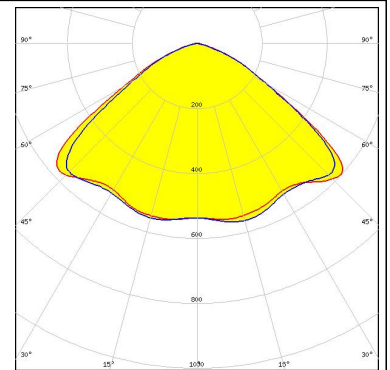


TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD
FWHM 119.0 + 117.0°
Efficiency 94 %
Peak intensity 0.350 cd/lm
Required components:

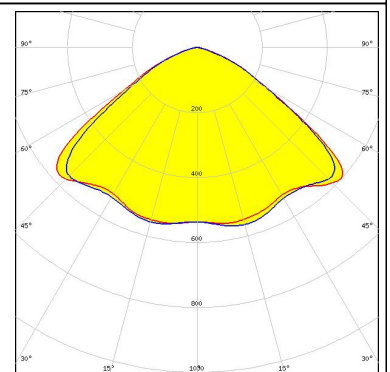


TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD
FWHM 119.0 + 117.0°
Efficiency 94 %
Peak intensity 0.350 cd/lm
Required components:

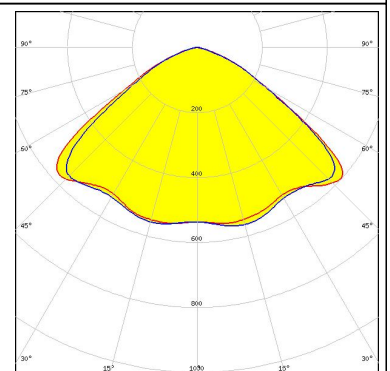

TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD
FWHM 119.0 + 117.0°
Efficiency 94 %
Peak intensity 0.350 cd/lm
Required components:

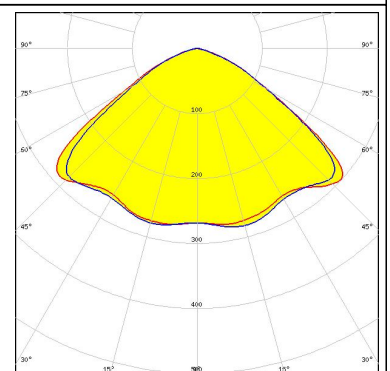

PHOTOMETRIC DATA (MEASURED):

TRIDONIC


LED RLE G2 HP 2x8 4000lm

FWHM 128.0°

Efficiency 94 %

Peak intensity 0.400 cd/lm


Required components:

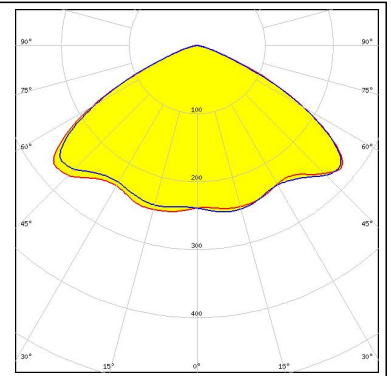


PHOTOMETRIC DATA (SIMULATED):




LED MHB-A/B
FWHM 117.0 + 116.0°
Efficiency 94 %
Peak intensity 0.320 cd/lm
Required components:

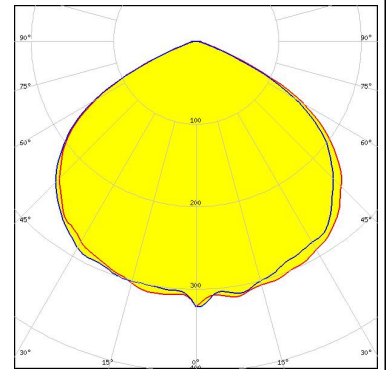

LED NVSxx19B/NVSxx19C
FWHM 122.0°
Efficiency 94 %
Peak intensity 0.391 cd/lm
Required components:




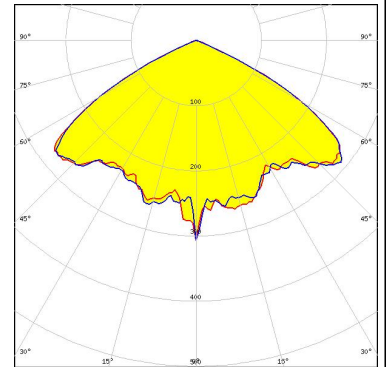


LED PrevaLED Brick DC 2x8
FWHM 122.0°
Efficiency 92 %
Peak intensity 0.400 cd/lm
Required components:

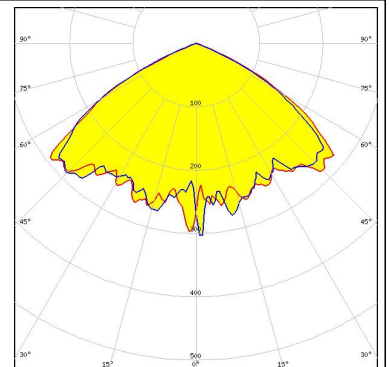

LED Duris S8
FWHM 114.0°
Efficiency 92 %
Peak intensity 0.380 cd/lm
Required components:

PHOTOMETRIC DATA (SIMULATED):
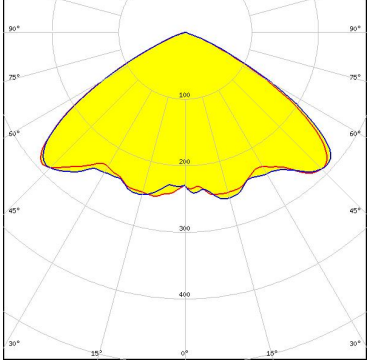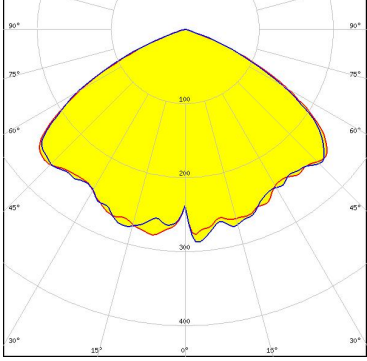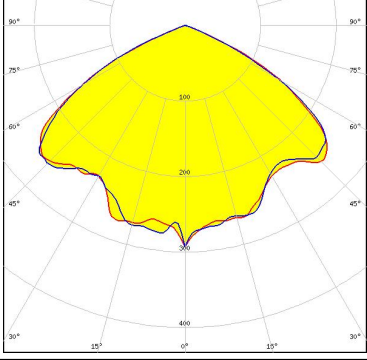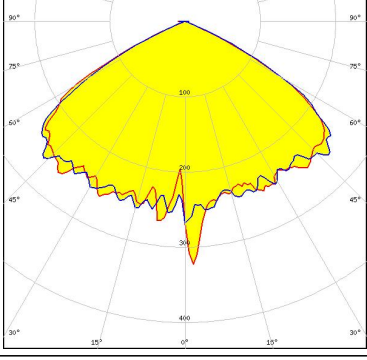
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3737 (2W version)</p> <p>FWHM 114.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 0.380 cd/lm</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3737 (3W version)</p> <p>FWHM 106.0 + 114.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 0.340 cd/lm</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED Oslon Square Gen3</p> <p>FWHM 122.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 0.340 cd/lm</p> <p>Required components: Undefined Manufacturer: Protective Plate, Glass</p>	
<p>SAMSUNG</p> <p>LED LH351D</p> <p>FWHM 120.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.350 cd/lm</p> <p>Required components:</p>	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)