

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







STRADELLA-8-HV-T4B

Wide IESNA Type IV forward-throw beam for wide area lighting like car parks. Variant with longer distance between location pins allowing high voltage circuit designs.

TECHNICAL SPECIFICATIONS:

Dimensions 49.5+49.5 mm

Height 5.8 mm

Fastening pin, screw

Colour clear

Box size 480 x 280 x 300 mm

Box weight 9.6 kg

Quantity in Box 800 pcs


ROHS compliant yes 1



MATERIAL SPECIFICATIONS:

ComponentTypeMaterialColourSTRADELLA-8-HV-T4BLens arrayPMMAclear

PRODUCT DATASHEET C15960_STRADELLA-8-HV-T4B

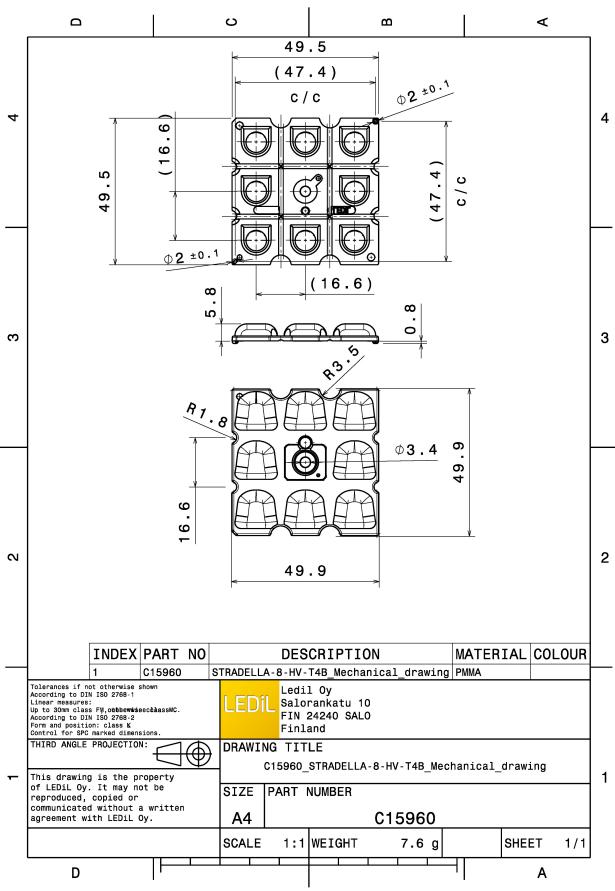

PHOTOMETRIC DATA (MEASURED):

CREE \$


LED XD16

FWHM Asymmetric

Efficiency 93 %

Peak intensity 0.670 cd/lm

Required components:



MUMILEDS


LED LUXEON 3030 2D (Round LES)

FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.730 cd/lm

Required components:



WNICHIA


LED NVSW219D

FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.500 cd/lm

Required components:



PHOTOMETRIC DATA (SIMULATED):

CREE 💠


LED XP-G3

FWHM Asymmetric

Efficiency 92 %

Peak intensity 0.445 cd/lm

Required components:



WNICHIA


LED NVSxE21A

FWHM Asymmetric

Efficiency 93 %

Peak intensity 0.570 cd/lm

Required components:



OSRAM Opto Semiconductors

LED

Oslon Square Gen3


FWHM Asymmetric

Efficiency

93 %

Peak intensity 0.523 cd/lm

Required components:



SAMSUNG


LED LH181A

FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.500 cd/lm

Required components:



PHOTOMETRIC DATA (SIMULATED):

SAMSUNG


LED LH181B

FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.530 cd/lm

Required components:



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDIL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy