

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









AMERICAN ELECTRICAL, INC.


INDUSTRIAL ELECTRICAL ACCESSORIES

425 SOUTHLAKE BLVD. • SUITE 9-B • RICHMOND, VA 23236 • (804) 379-2899 • FAX: (804) 379-8935

DIN RAIL MOUNTED CIRCUIT BREAKERS

UL 1077 RATED



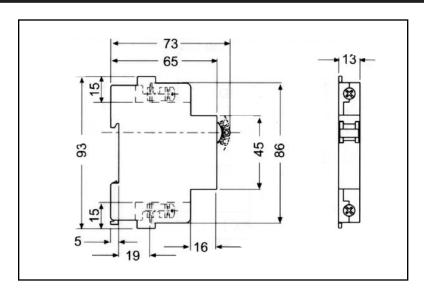

FEATURES:

- UL 1077 APPROVED (UL 489 ALSO AVAILABLE)
- DIN RAIL MOUNTED
- COMPACT 13 MM WIDTH
- ONE, TWO & THREE POLE
- CURRENT RATING UP TO 50 A
- 100% RATING CAPABILITY
- HYDRAULIC-MAGNETIC TECHNOLOGY

TECHNICAL DATA:

DIELECTRIC STRENGTH

NUMBERS OF POLES 1, 2 & 3

MAXIMUM VOLTAGE 277/480 50/60 Hz

MINIMUM AMP RATING 1 AMP
MAXIMUM AMP RATING 50 AMP

INTERRUPTING CAP. 5000A @ 120V

1000A @ 277V

1960V 50/60 Hz

1000A @ 480V

INSULATION RESISTANCE 100 MEGAOHM

OPERATING TEMP. RANGE -40°C TO +60°C

PART NUMBERING SYSTEM:



E.G., 1 FOR 1 AMP, 15 FOR 15 AMP, ETC.

EXAMPLE: C10A1P = 10A SINGLE POLE CIRCUIT BREAKER

CE





AMERICAN ELECTRICAL, INC.


INDUSTRIAL ELECTRICAL ACCESSORIES

425 SOUTHLAKE BLVD. • SUITE 9-B • RICHMOND, VA 23236 • (804) 379-2899 • FAX: (804) 379-8935

DIN RAIL MOUNTED CIRCUIT BREAKERS

UL 489 RATED



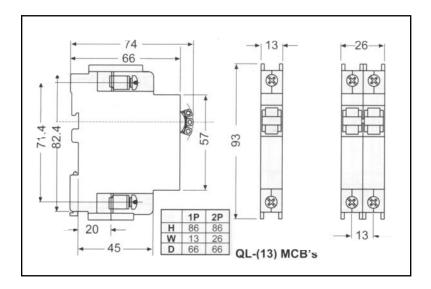

FEATURES:

- UL 489 APPROVED (UL 1077 ALSO AVAILABLE)
- DIN RAIL MOUNTED
- COMPACT 13 MM WIDTH
- ONE & TWO POLE ONLY
- CURRENT RATING UP TO 25 A
- 100% RATING CAPABILITY
- HYDRAULIC-MAGNETIC **TECHNOLOGY**

TECHNICAL DATA:


NUMBERS OF POLES 1 AND 2 POLE ONLY MAXIMUM VOLTAGE 120/240V 50/60 Hz MINIMUM AMP RATING 1 AMP

MAXIMUM AMP RATING 25 AMP 10,000 A INTERRUPTING CAP.

1500V 50/60 Hz DIELECTRIC STRENGTH 100 MEGAOHM INSULATION RESISTANCE -40°C TO +60°C

OPERATING TEMP. RANGE

PART NUMBERING SYSTEM:



E.G., 1 FOR 1 AMP, 15 FOR 15 AMP, ETC.

EXAMPLE: C10A1P-489 = 10A SINGLE POLE CIRCUIT BREAKER UL 489 RATED

