



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

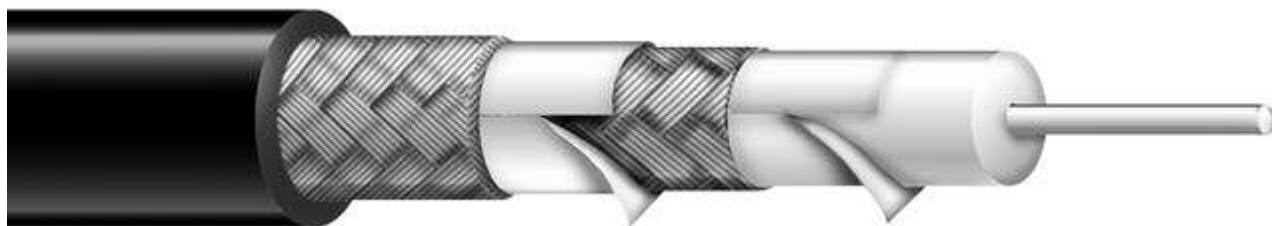
Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Product SKU:** C5044.41.01  
**Product Description:** C5044, Coaxial Cable, RG11/U Type, 14 AWG Solid Copper Clad Steel, (2) 100% Flexfoil® 1st Bonded (1) 61% (1) 40% Aluminum Braid(s), PVC Jacket - 1000 Ft. Reel  
**Product Category:** Electronics - Coaxial Cable - RG 11/U - Black

**Product Construction:**

- Conductor:
- Copper clad steel per ASTM B-869
- Insulation/Core:
- Cellular polyethylene
- Shield:
- Aluminum braid
  - Flexfoil® shield
  - Quad-Shield Design
- Jacket:
- Premium PVC compound

**Product Specification:**

- No. of Conductors:
- 1
- Conductor Size (AWG):
- 14
- Jacket Color:
- Black
- Insulation Material (in):
- Cellular Polyethylene 0.280
- Insulation Material (mm):
- Cellular Polyethylene 7.11
- Shield Coverage Nominal Shield DCR:
- (2) 100% Flexfoil® 1st Bonded (1) 61% (1) 40% Aluminum Braids 3.4 Ohm/M
- Nominal Outside Diameter (in):
- 0.405
- Nominal Outside Diameter (mm):
- 10.29

Nominal Capacitance (pF/ft):	• 16.20
Nominal Capacitance (pF/m):	• 53.15
Velocity of Propagation %:	• 85
Nominal Impedance Ohm:	• 75
Nominal Attenuation MHz/dB per 100 ft:	• 1/0.30
	• 50/0.90
	• 100/1.30
	• 500/3.00
	• 10/0.70
	• 200/1.90
	• 1000/4.40
Standard Packaging:	• 1000' Non-returnable Wood Reels
Standard Package Quantity:	• 1
UPC #:	• 079407742073
Put-up:	• 1000
SCC-14:	• 50079407742077
Cube:	• 4095.8125
Weight Per Unit of Measure:	• .07
ColorOption:	• Black

**Product Information:**

Applications:

- CATV
- Drop cable
- MATV
- Suitable for RF signal transmission

Compliances:

- NEC CL2, CATV, CM, CEC CM
- UL Style 1354 (UL:80°C,30V)
- NEC/CEC Type CMG (CSA: 80°C, 300V)

Packaging:

- 1000' (305 m) Reels
- Other put-ups available- consult Customer Service

**Technical Specifications**

Unit Conversion Factors

Cable Design Equations - Balanced Pair

Insulation and Jacket Properties

Temperature Conversion Chart

Decimal and Unit Conversion Factors

Cable Design Equations - Braid Shield

AWG Conductor Chart

Conduit Capacity Chart

Cable Design Equations - Coaxial Cable

Engineering Prefixes

Coax Connector Cross Reference

Glossary



**CAROL  
BRAND**