



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1 2 3 4 5 6 7

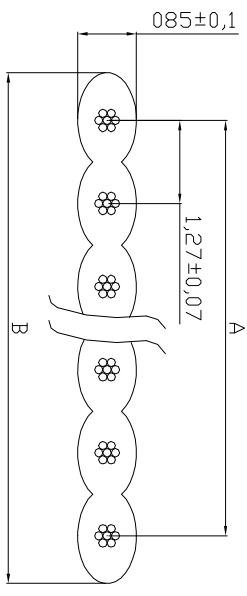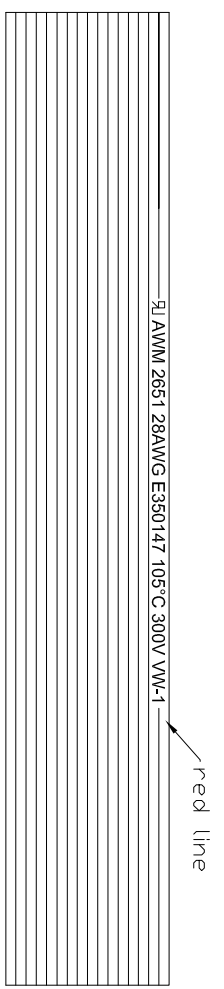

Cores	Size of conductor AWG	Composition	A①	B①	Cores	Size of conductor AWG	Composition	A①	B①
02	28	7/0.127	1.27±0.15	2.54±0.15	18	28	7/0.127	21.59±0.30	22.86±0.30
03	28	7/0.127	2.54±0.15	3.81±0.15	20	28	7/0.127	24.13±0.30	25.40±0.30
04	28	7/0.127	3.81±0.15	5.08±0.15	24	28	7/0.127	29.21±0.30	30.48±0.30
05	28	7/0.127	5.08±0.20	6.35±0.20	25	28	7/0.127	30.48±0.30	31.75±0.30
06	28	7/0.127	6.35±0.20	7.62±0.20	26	28	7/0.127	31.75±0.30	33.02±0.30
07	28	7/0.127	7.62±0.20	8.89±0.20	30	28	7/0.127	36.83±0.35	38.10±0.35
08	28	7/0.127	8.89±0.20	10.16±0.20	34	28	7/0.127	41.91±0.35	43.18±0.35
09	28	7/0.127	10.16±0.25	11.43±0.25	37	28	7/0.127	45.72±0.35	46.99±0.35
10	28	7/0.127	11.43±0.25	12.70±0.25	40	28	7/0.127	49.53±0.35	50.80±0.35
11	28	7/0.127	12.70±0.25	13.97±0.25	50	28	7/0.127	62.23±0.35	63.50±0.35
12	28	7/0.127	13.97±0.25	15.24±0.25	60	28	7/0.127	74.93±0.40	76.20±0.40
13	28	7/0.127	15.24±0.25	16.51±0.25	64	28	7/0.127	80.01±0.40	81.28±0.40
14	28	7/0.127	16.51±0.25	17.78±0.25					
15	28	7/0.127	17.78±0.25	19.05±0.25					
16	28	7/0.127	19.05±0.25	20.32±0.25					

RoHS compliant

Unit: mm

Material
 Insulation: PVC Grey cable Red Line
 Insulation thickness: 9mil ave ; 7mil min.

Conduction
 AWG size: 28AWG
 Number of stands in each conductor: 7/0.127mm TC
 Lay of strands in each conductor: 0.5 inch at least
 Cross section area: 156 circular mil

Electronic characteristics
 Spark test: 2500 V
 Dielectri strength test: 2000V min. in 1 minute
 Conductor resistance: 237Ω max./KM
 Insulation resistance: 100MΩ max./KM

Capacity: 40pF/M
 Inductance: 1.45µH/M
 Impedance: 100Ω
 Propagation delay time: 4.2ns/m

Cable physical properties
 After seven days air oven at 136°C
 Average tensile strength: 1500 Tbs/inch²
 Percent of original: 70% at least
 Average elongation: 200%
 Percent of original: 65% at least

UL style: 2651
 Rated temperature: 105°C
 Rated voltage: 300V
 Passes VW-1 vertical flame test

Scale	Free	Customer-No.	
TOLERANCE		Drawn	24.04.2015
		Approved	04.11.2015
DIM		ASSMANN WSW-No.	
TOL		AWG28-xx/G/300	
		Drawing-No.	
Update the tolerance		ASS 7306 CA	
Drawn		rev01	
Modification		Replace	
Date		Sheet	
Name			

1 2 3 4 5 6 7

H G F E D C B A