

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00112	Connector, dc plug, 3.5x1.35xL18.5 mm, brass nickel plated	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00050	Overmold, PVC, black	1	

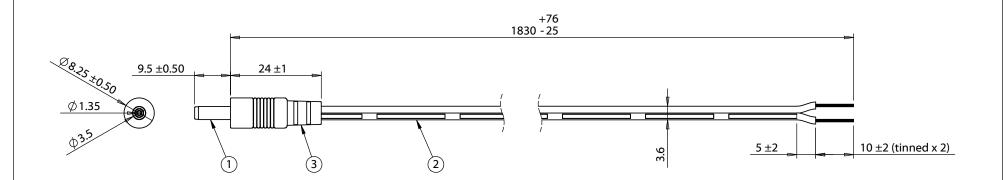

Notes:

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram						
50-00112	wire color					
center	black with stripe					
sleeve	black					

Revision:	Date:	Description:	Prepared:	Notes:						
Α	1/19/2009	Re-issue CUI spec as Tensility	GL 2016.05.05 17:00:10 -07'00'	RoHS and REACH compliant		TENSILITY				
A1	1/19/2011	Added overmold dimensions, and updated description	Verified: LA Digitally signed by LA Dit critical Associated by L	Function test: no open, no short circuit, no intermittent			tel 1.541.323.3228 800 877.670.7118			
A2	8/31/2011	Updated description, connector, and wire information	Dimensions are in			fax 1.541.323.4202 web tensility.com				
А3	10/9/2013	Changed connector to 50-00112	millimeters. Tolerances: X: ± 0.5 mm	Description: Cable, 1830 mm, 3.5x1.35x9.5 mm, 50-00112 dc		Size: Part number: A 053-0192R (CA-2193)				
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	plug to stripped tinned, 24 AWG, 30-00003 wire		Scale	: 1:1		Sheet 1 of 1	

5 4 3 2