



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00110	Connector, stereo plug, 2.5xL19 mm, brass nickel plated	1	
2	30-00005	Wire, 2C BC, 24 AWG, 300V, 80C, 3.7 mm, shielded, PVC, 76A	1	
3	24-00051	Overmold, PVC, black, 90°	1	
4	Heat Shrink	Heat shrink tube, Ø2.0, 30±2 mm, 105°C, black	1	

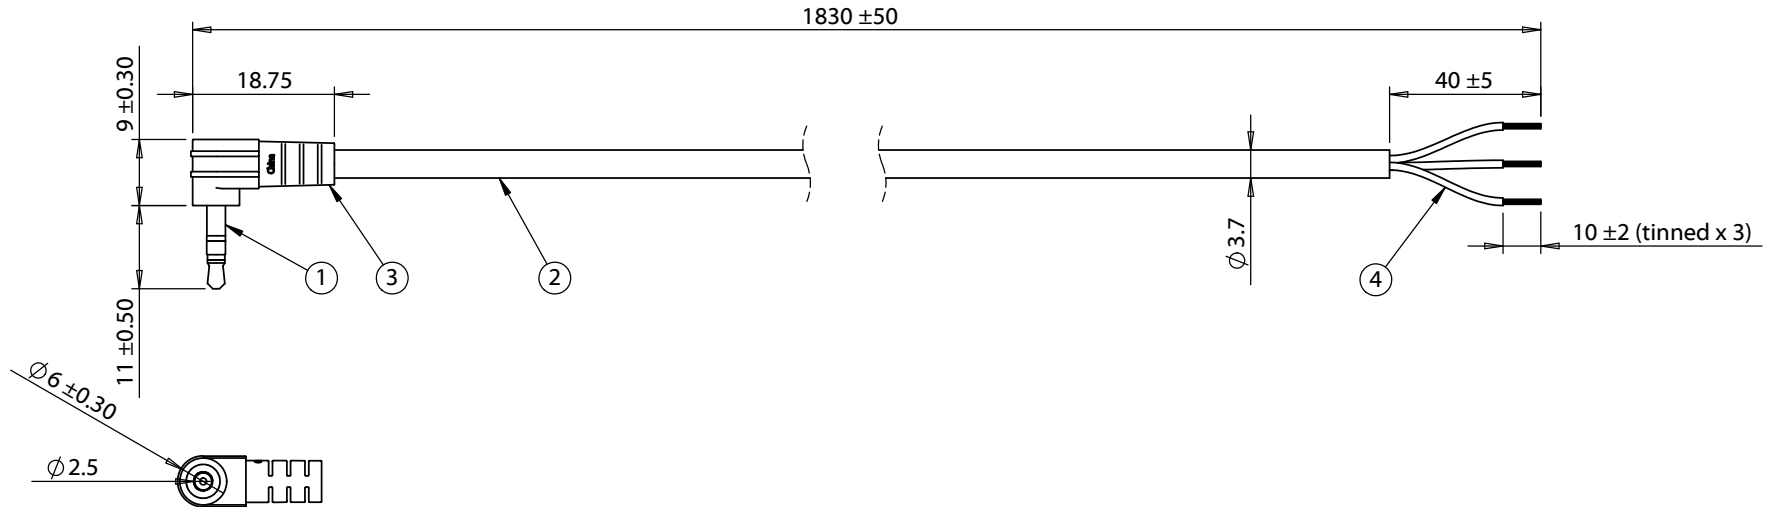

Wiring diagram 50-00110	
	Wire Color
A	Red
B	Black
C	Shield

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	1/19/2009	Re-issued CUI spec as Tensility	GL Digitally signed by GL Date: 2017.02.10 16:55:39 -08'00'	RoHS and REACH compliant	
A1	1/18/2010	Plug description corrected	Verified: PS Digitally signed by PS Date: 2017.02.13 14:46:23 -08'00'	Function test: no open, no short circuit, no intermittent	
A2	8/31/2011	Updated description, connector, and wire description.	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 2.5 mm 90° 50-00110 stereo plug to stripped tinned, 24 AWG, 30-00005 wire, shielded	
A3	1/8/2013	Added strain relief diameter dimension			Size: A
A4	2/10/2017	Updated notes			Part number: 053-0278R (CA-2204)
					Scale: 1:1
					Sheet 1 of 1