



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00007	Connector, 2.5xL20.2 mm, 4C audio plug, brass nickel plated	1	
2	30-00413	Wire, 4C TC, 26 AWG, 30V, 80C, 3.7 mm, shielded, PVC, 89A	1	
3	24-00075	Overmold, PVC, black	1	

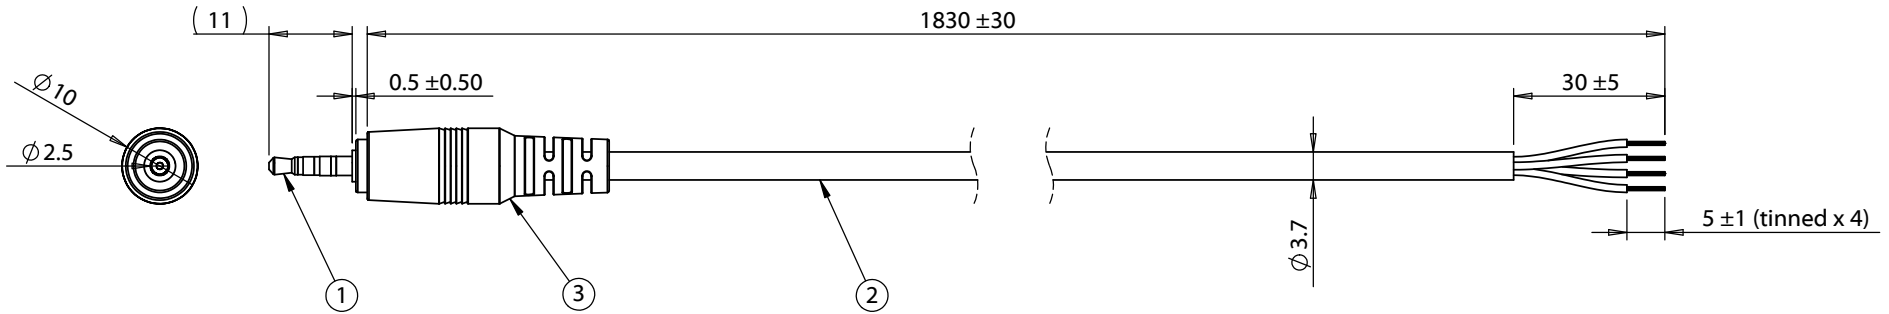

Wiring Diagram	
50-00007	wire color
A	Red
B	Black
C	Yellow
D	Green

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	1/19/2009	Re-issue CUI to Tensility template	GL <small>Digitally signed by GL Date: 2017.02.10 16:18:56 -08'00'</small>	RoHS and REACH compliant	
A1	5/11/2009	Added connector part number	PS <small>Digitally signed by PS Date: 2017.02.13 14:35:18 -08'00'</small>	Function test: no open, no short circuit, no intermittent	
A2	8/30/2011	Updated description and connector information	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	
A3	2/23/2016	Corrected barrel length dimensions		Cable, 1830 mm, 4C 2.5mm 50-00007 plug to stripped tinned, 26 AWG, 30-00413	
A4	2/10/2017	Updated notes			Part number:
					A 053-0111R (CA-254S) Scale: 1:2 Sheet 1 of 1