



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION

- Part No. : **CA.50**
- Product Name : 5150-5900 MHz Ceramic Chip Monopole
Antenna
Wi-Fi/ WHDMI / 5GHz ISM Band
- Feature : 3.2mm *1.6mm * 0.5mm
Low profile
Peak gain 3.4 dBi
Compact Size
RoHS Compliant

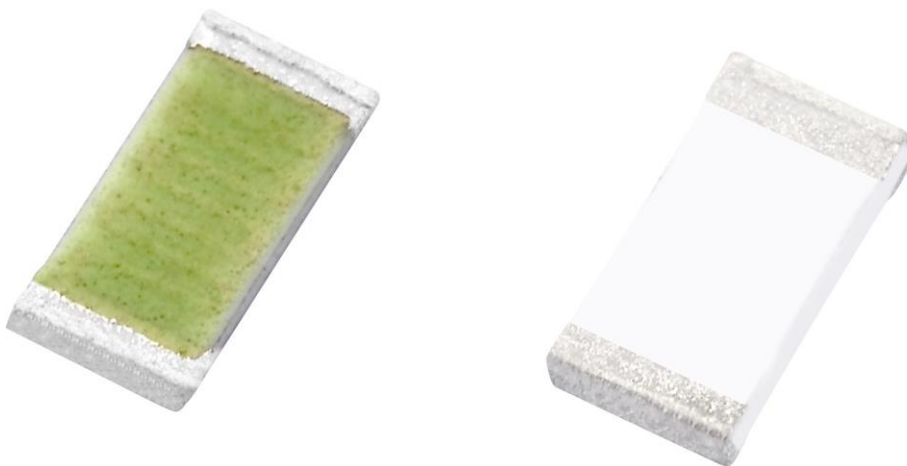

1. Introduction

Taoglas' 5150-5900 MHz ceramic chip antenna is specifically designed for Wi-Fi/ WHDMI/ High Bandwidth 5GHz band applications. It is a high efficiency miniature SMD edge mounted ceramic monopole antenna with small footprint requirement. This ceramic chip antenna uses the main PCB as its ground plane, thereby increasing antenna efficiency. It is tuned for different PCB sizes by simply changing the value of the matching circuit. CA.50 antenna electrical properties are symmetrical therefore the antenna can be soldered to the board from either side. At 3.2mm*1.6mm*0.5mm, it is one of the smallest antennas available worldwide. This antenna is delivered on tape and reel.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna

that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

Applications


IEEE802.11a (5150-5900 MHz)

WHDMI PCMCIA cards, USB dongles, High Bandwidth Video Transmission


2. Specification Table

Electrical	
Center Frequency (MHz)	5500
Bandwidth (MHz)	750 min.
Peak Gain (dBi)	3.4 (typical)
Efficiency (%)	79 (typical)
VSWR	2 max.
Impedance (Ω)	50 Ω
Polarization	Linear
Radiation Pattern	Omni
Input Power(W)	50
MECHANICAL	
Dimensions (mm)	3.2 x 1.6 x 0.5
Ground plane (mm)	40x40
Material	AS 6
ENVIRONMENTAL	
Temperature Range	-40°C to 85°C
Temperature Coefficient of Frequency (ppm/°C)	0 \pm 20 max. (@-40°C to 85°C)
Humidity	Non-condensing 65°C 95% RH


3. Return Loss

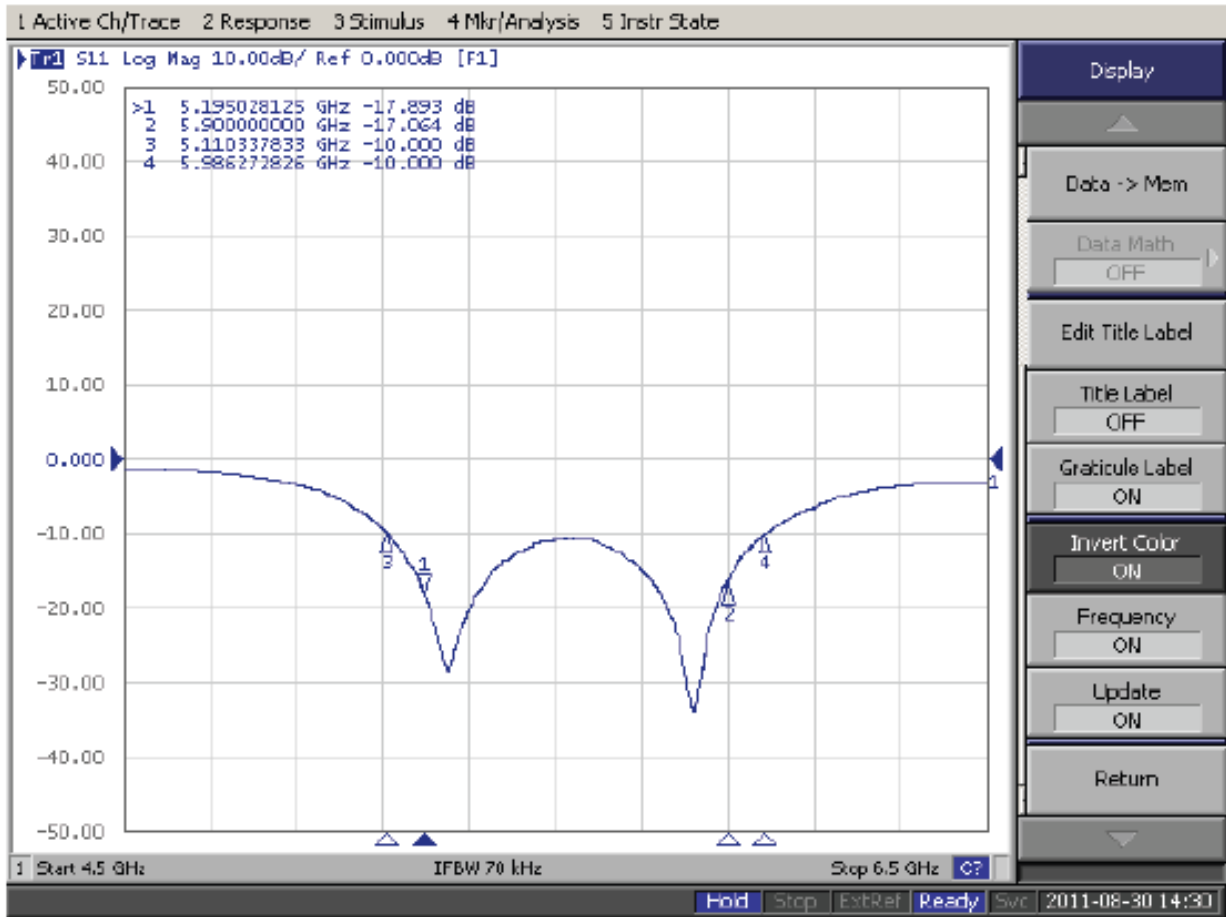

4. Smith Chart

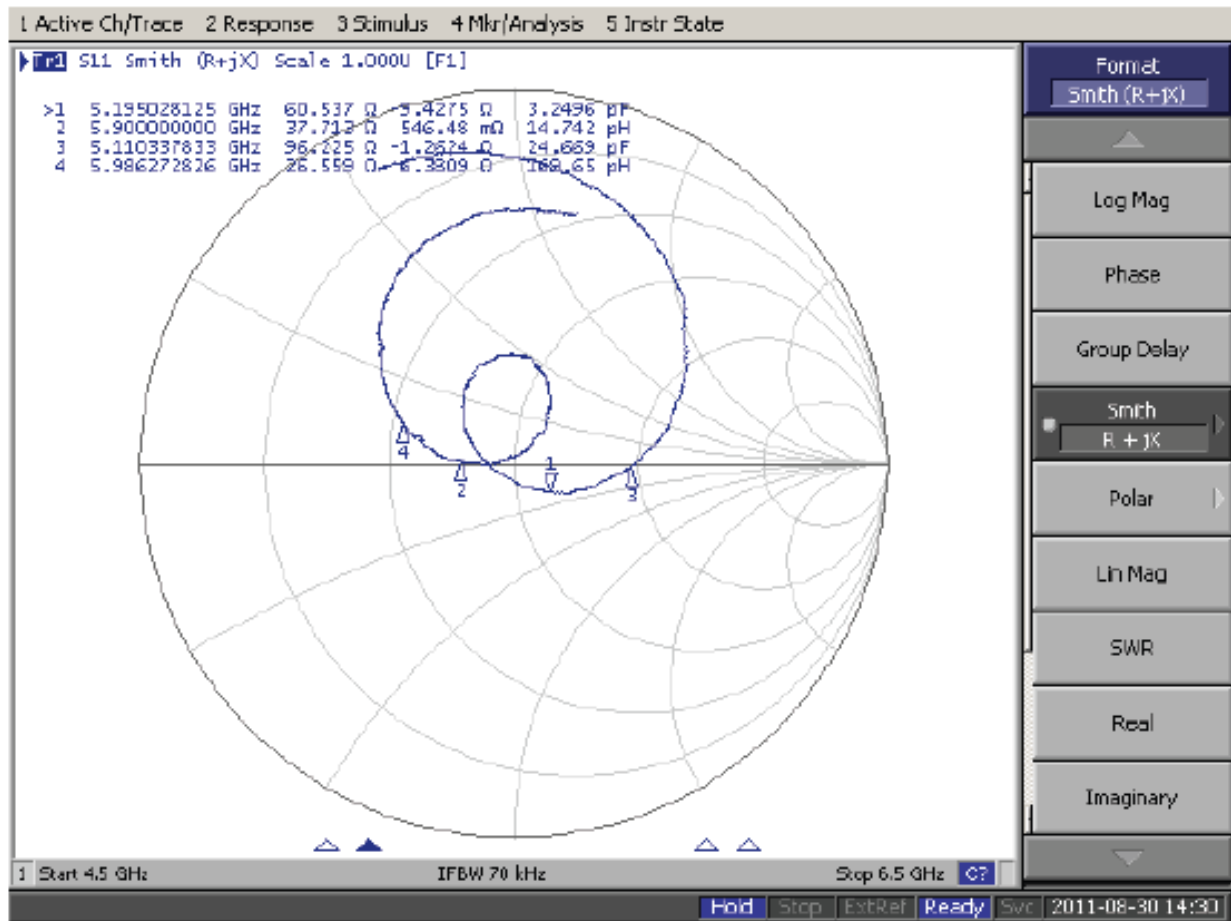


5. Efficiency

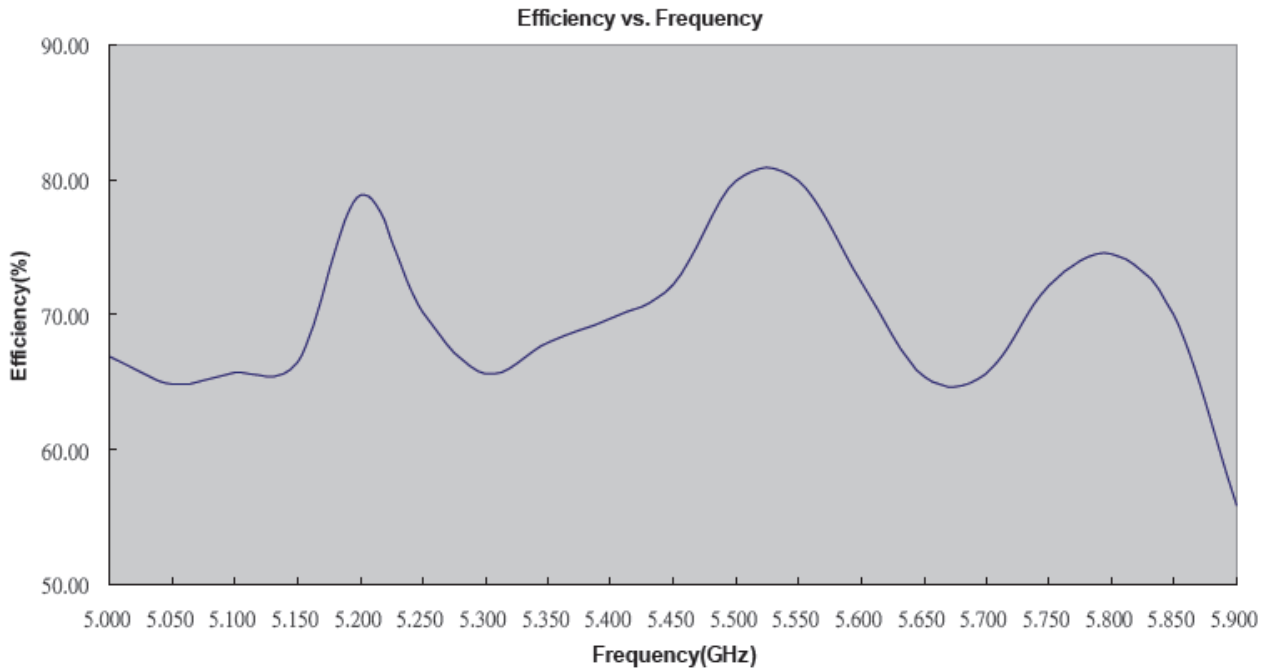


Frequency(GHz)	5.000	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450
Efficiency(dB)	-1.75	-1.88	-1.82	-1.77	-1.03	-1.54	-1.83	-1.68	-1.57	-1.41
Efficiency(%)	66.83	64.86	65.75	66.53	78.89	70.15	65.61	67.92	69.66	72.28
Gain(dBi)	2.66	2.22	2.00	2.76	3.22	2.56	2.25	2.53	2.77	3.45



Frequency(GHz)	5.500	5.550	5.600	5.650	5.700	5.750	5.800	5.850	5.900
Efficiency(dB)	-0.97	-0.97	-1.40	-1.84	-1.83	-1.42	-1.28	-1.55	-2.53
Efficiency(%)	79.98	79.98	72.44	65.46	65.61	72.11	74.47	69.98	55.85
Gain(dBi)	3.42	3.35	3.14	2.80	2.86	3.28	3.59	3.40	2.56

6. Antenna Radiation Patterns


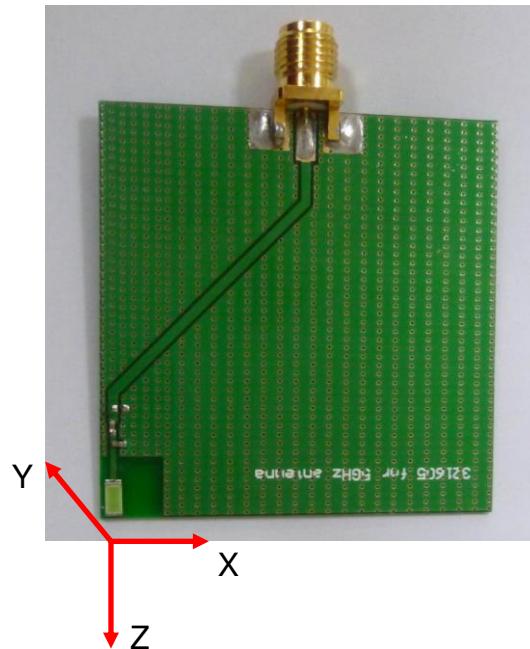



6.1 3D Gain pattern @ 5150 MHz

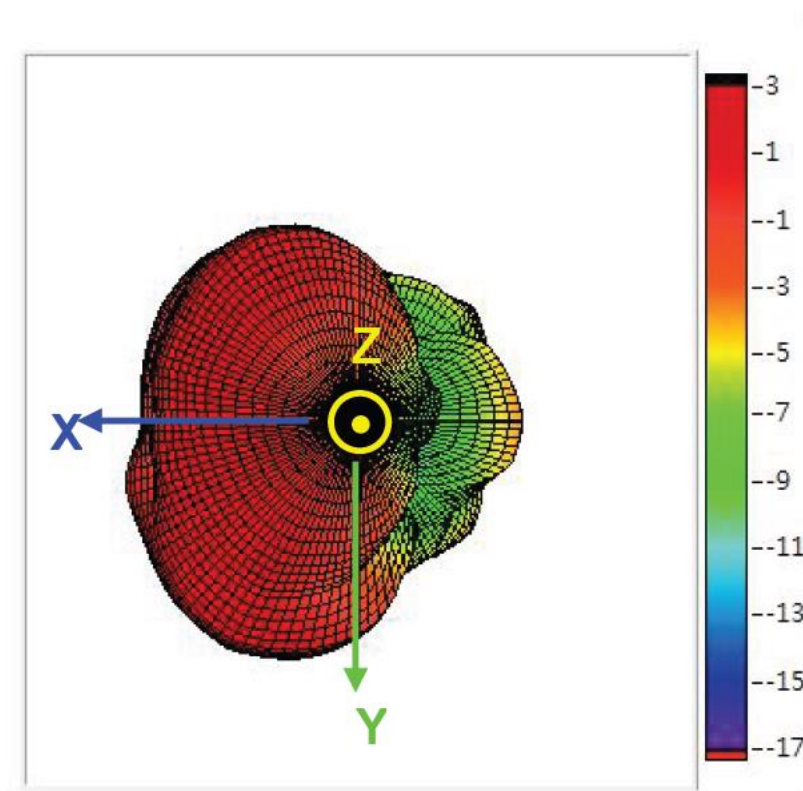

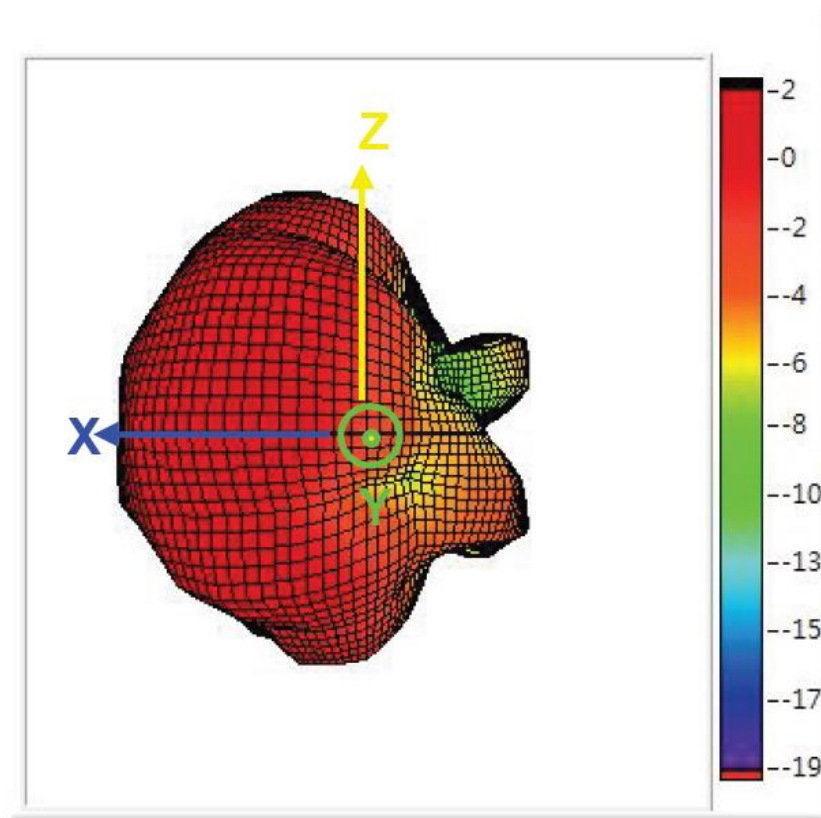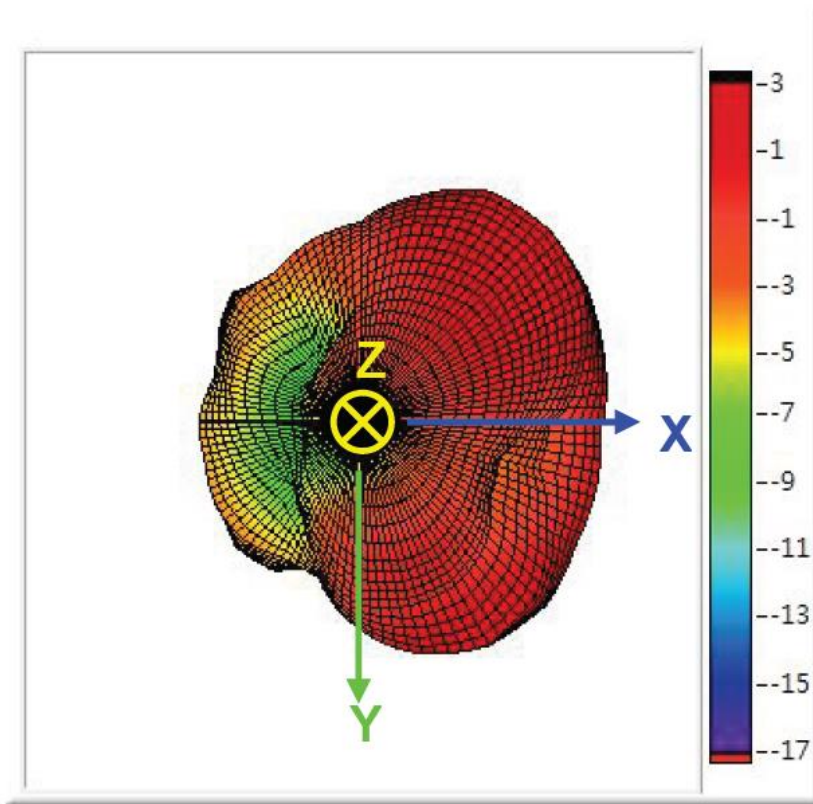




6.2 3D Gain pattern @ 5350 MHz

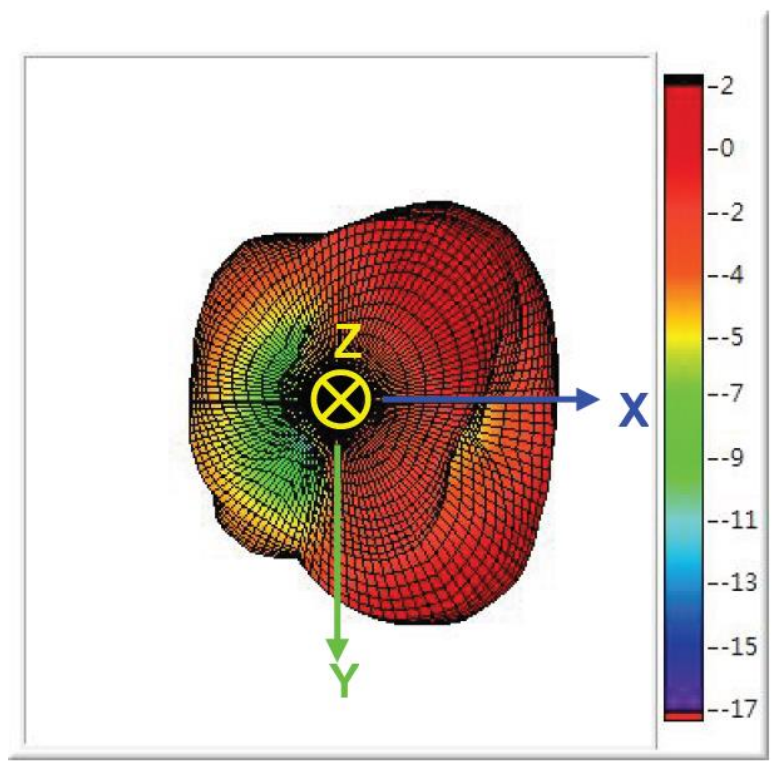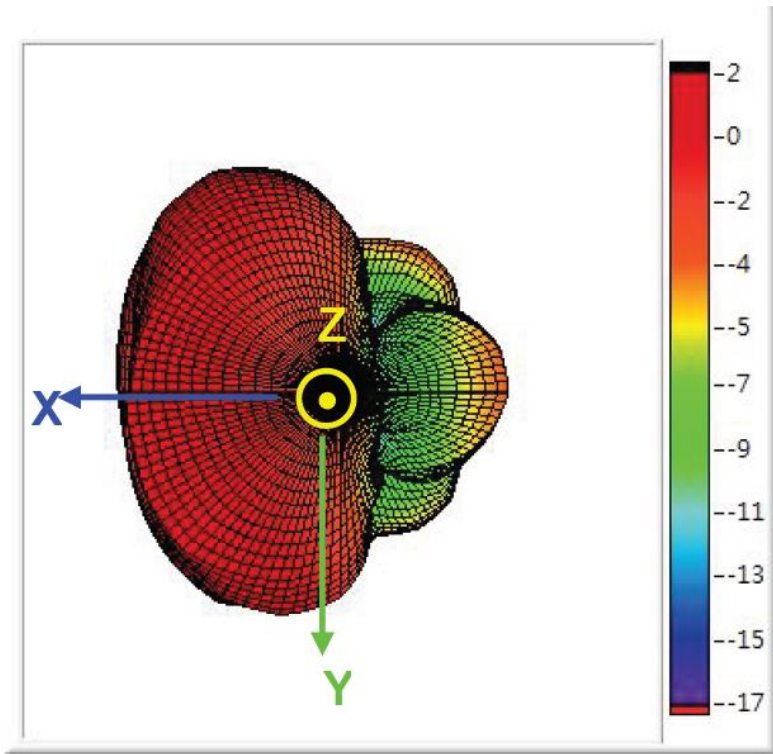


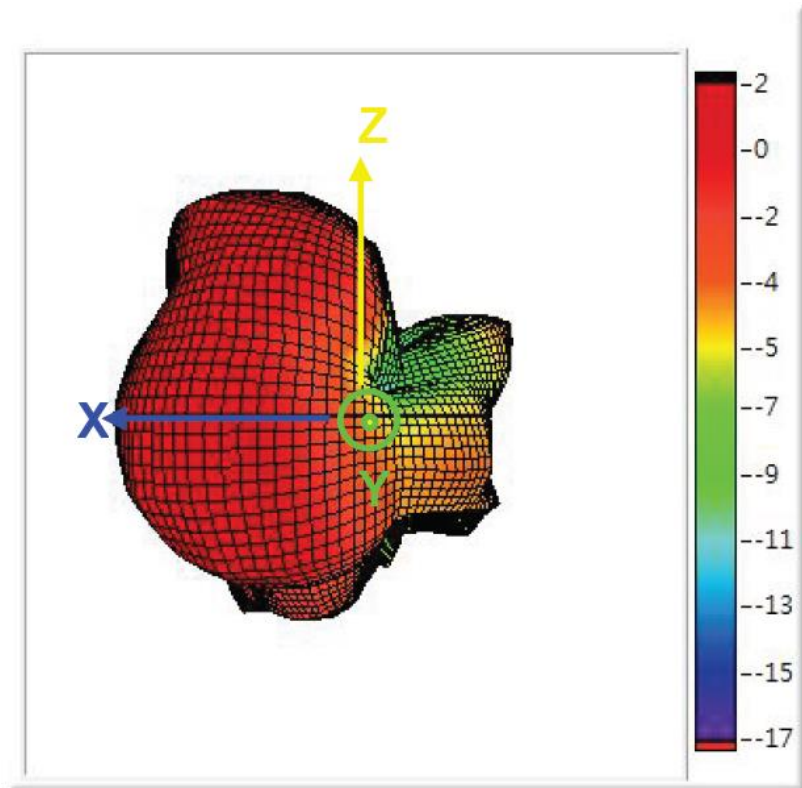



6.3 3D Gain pattern @ 5700 MHz

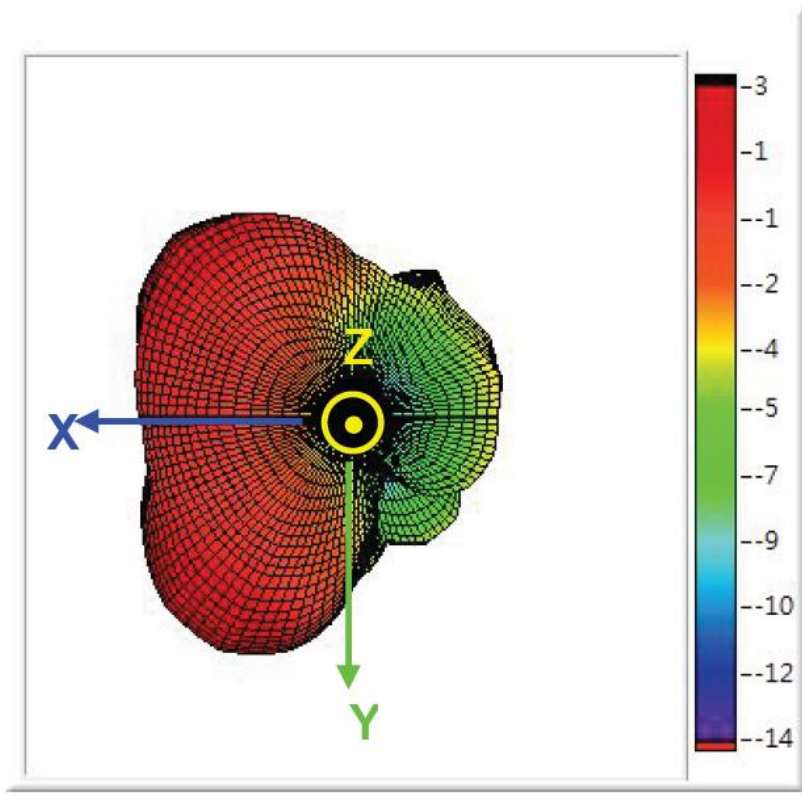

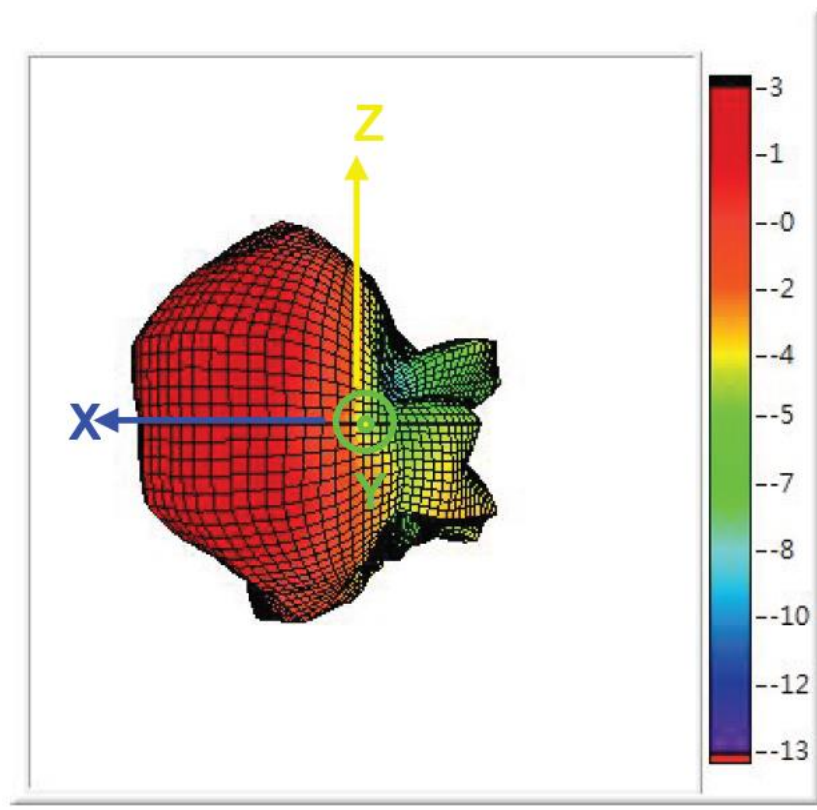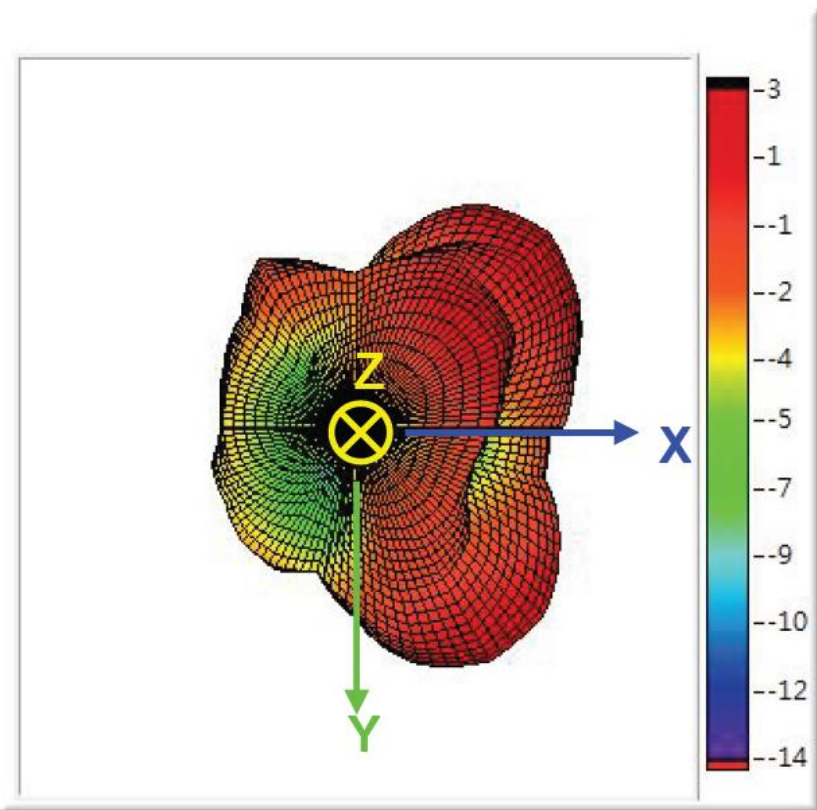



6.4 3D Gain pattern @ 5850 MHz

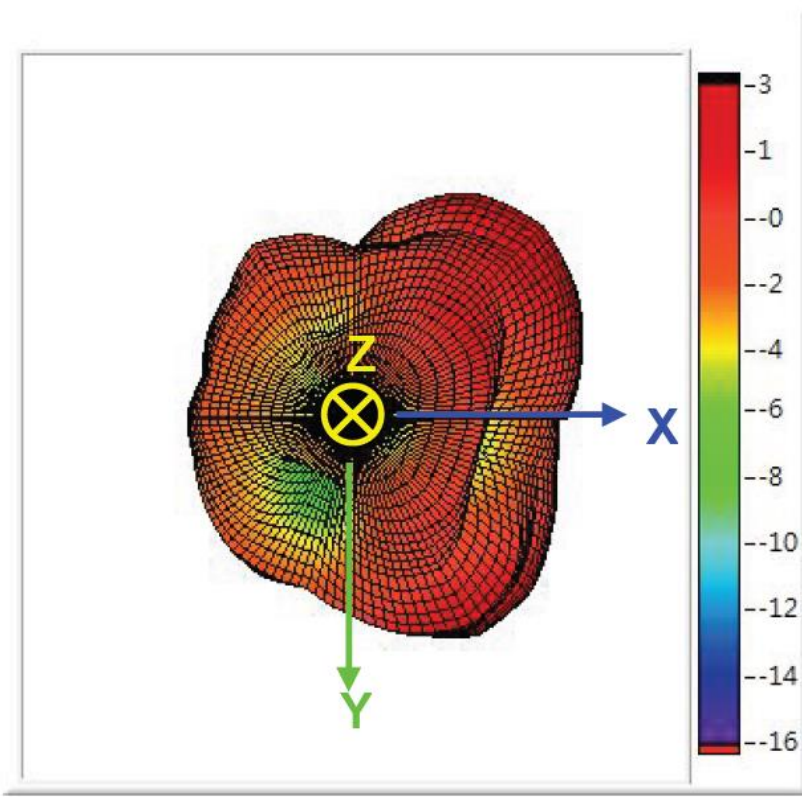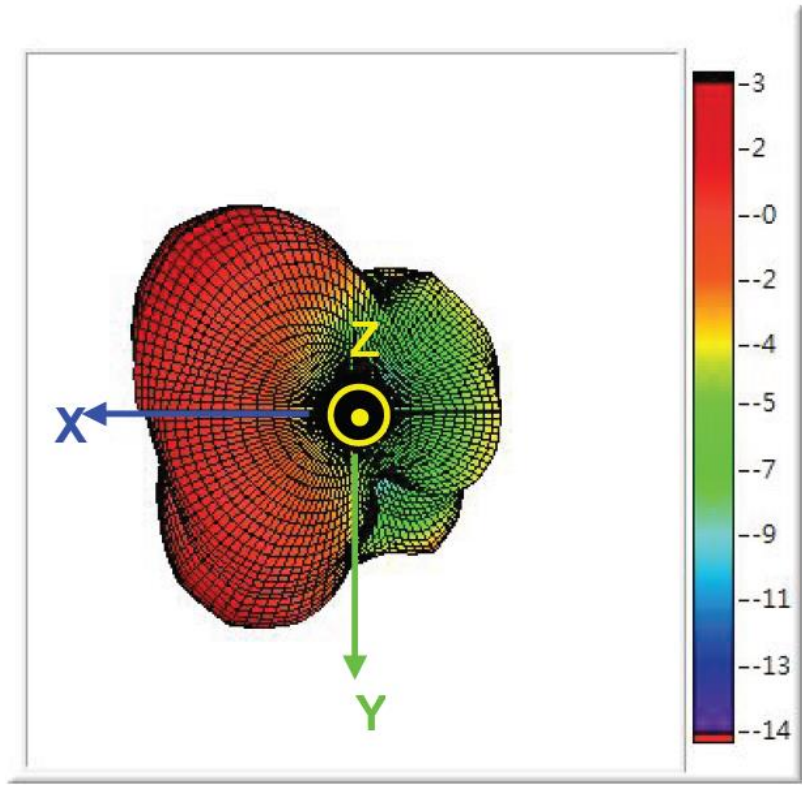

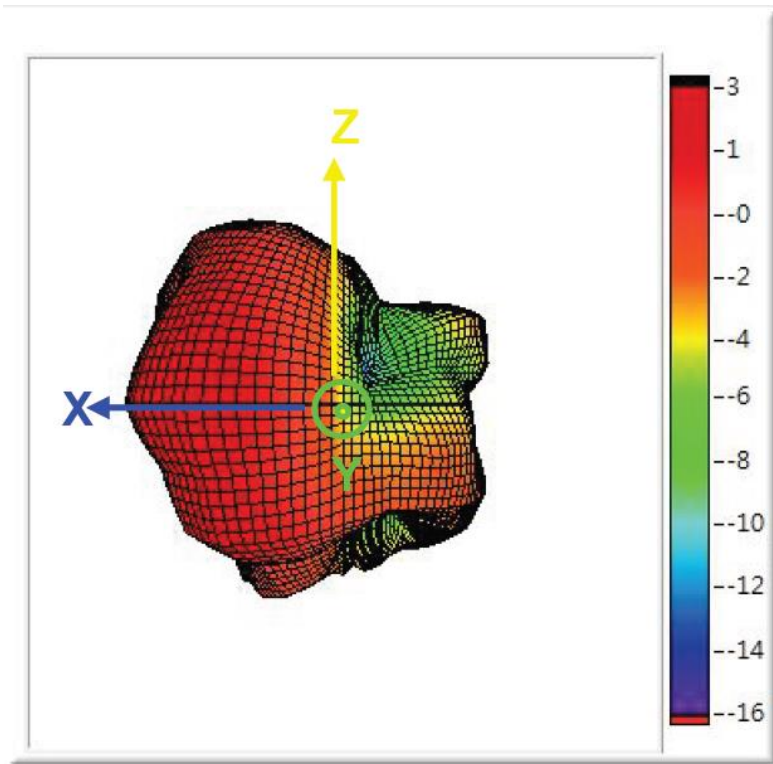

7. Mechanical Drawing

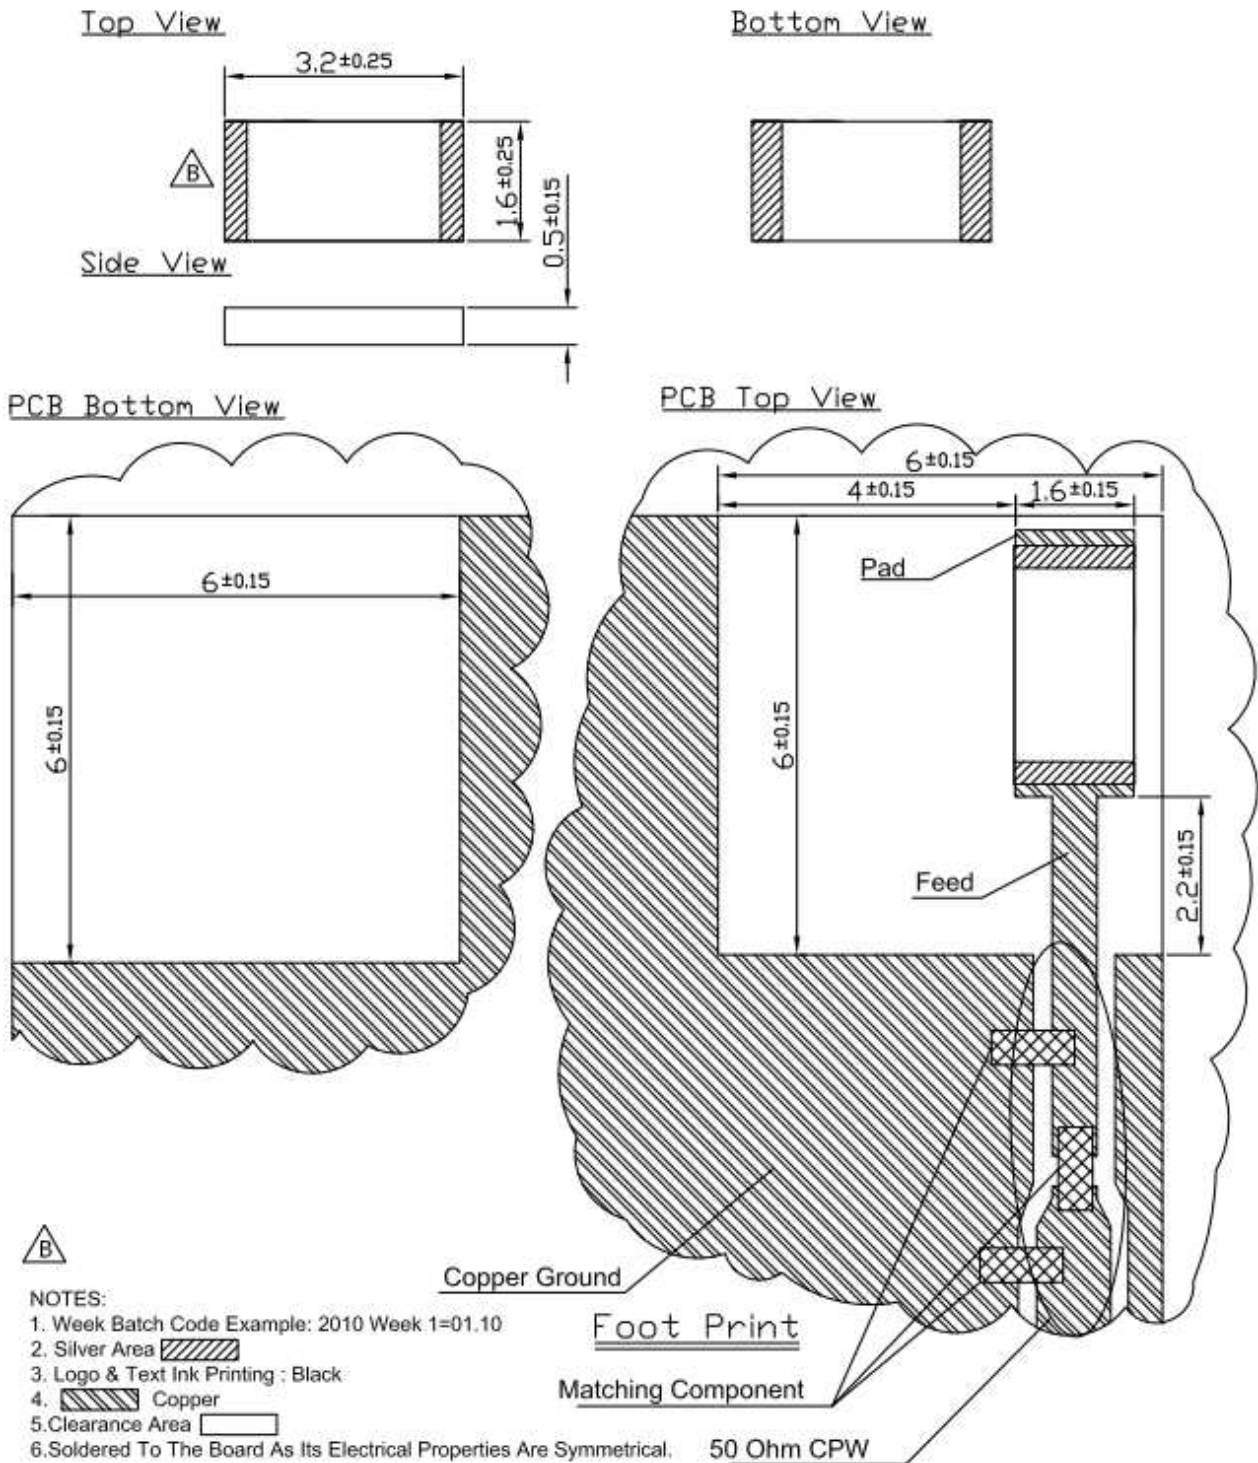


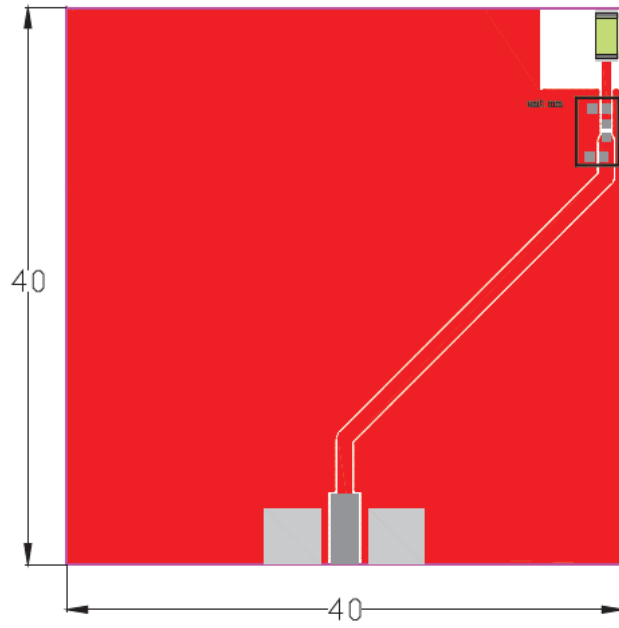

Unit : mm


8. Layout Guide

Solder Land Pattern:

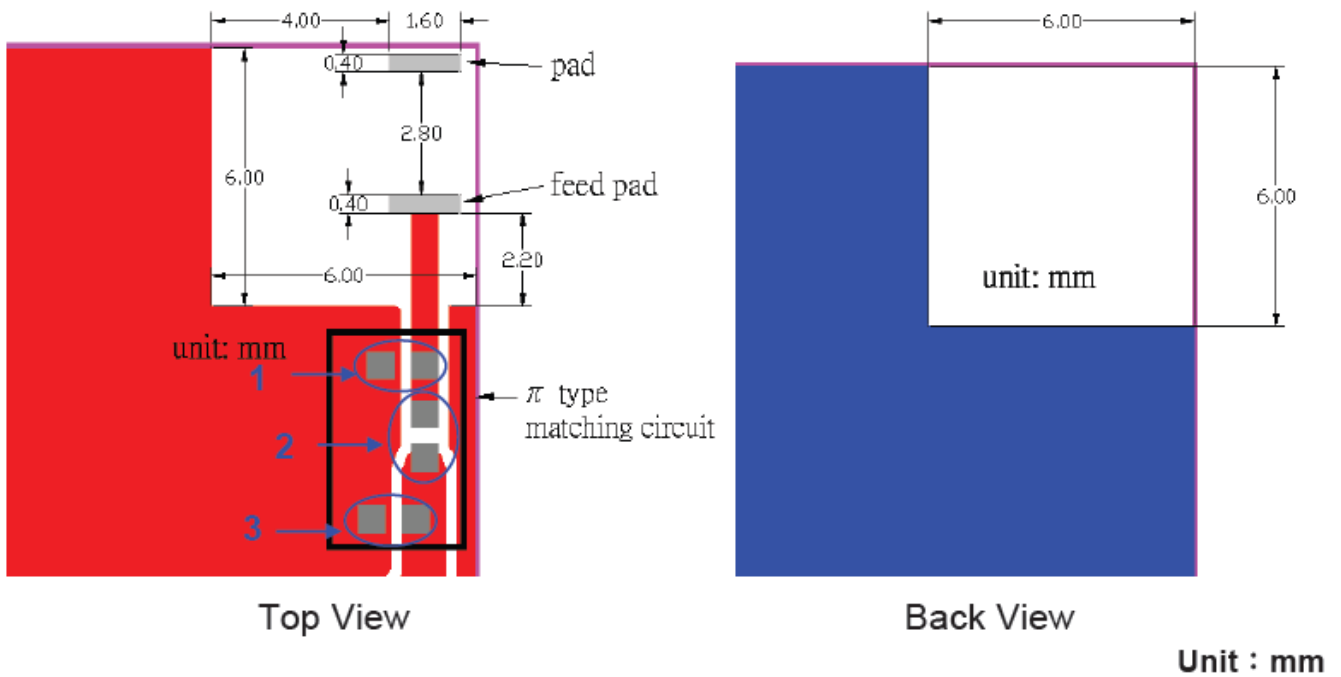

Matching circuit: (Center frequency is 5500MHz at 40x40mm ground plane)


Antenna

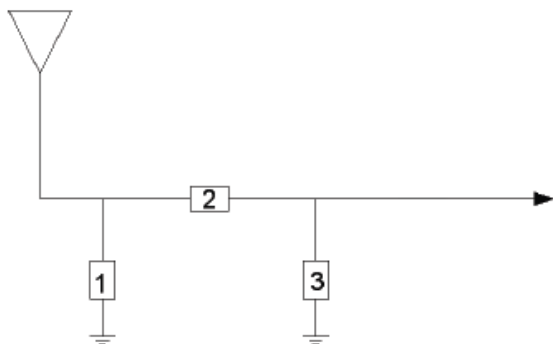

System Matching Circuit Component		
Location	Description	Vendor
1	0.3pF	DARFNO(0402)
2	4.7pF	DARFNO(0402)
3	0.47pF	DARFNO(0402)

9. Soldering Conditions

Typical Soldering profile for lead-free process:

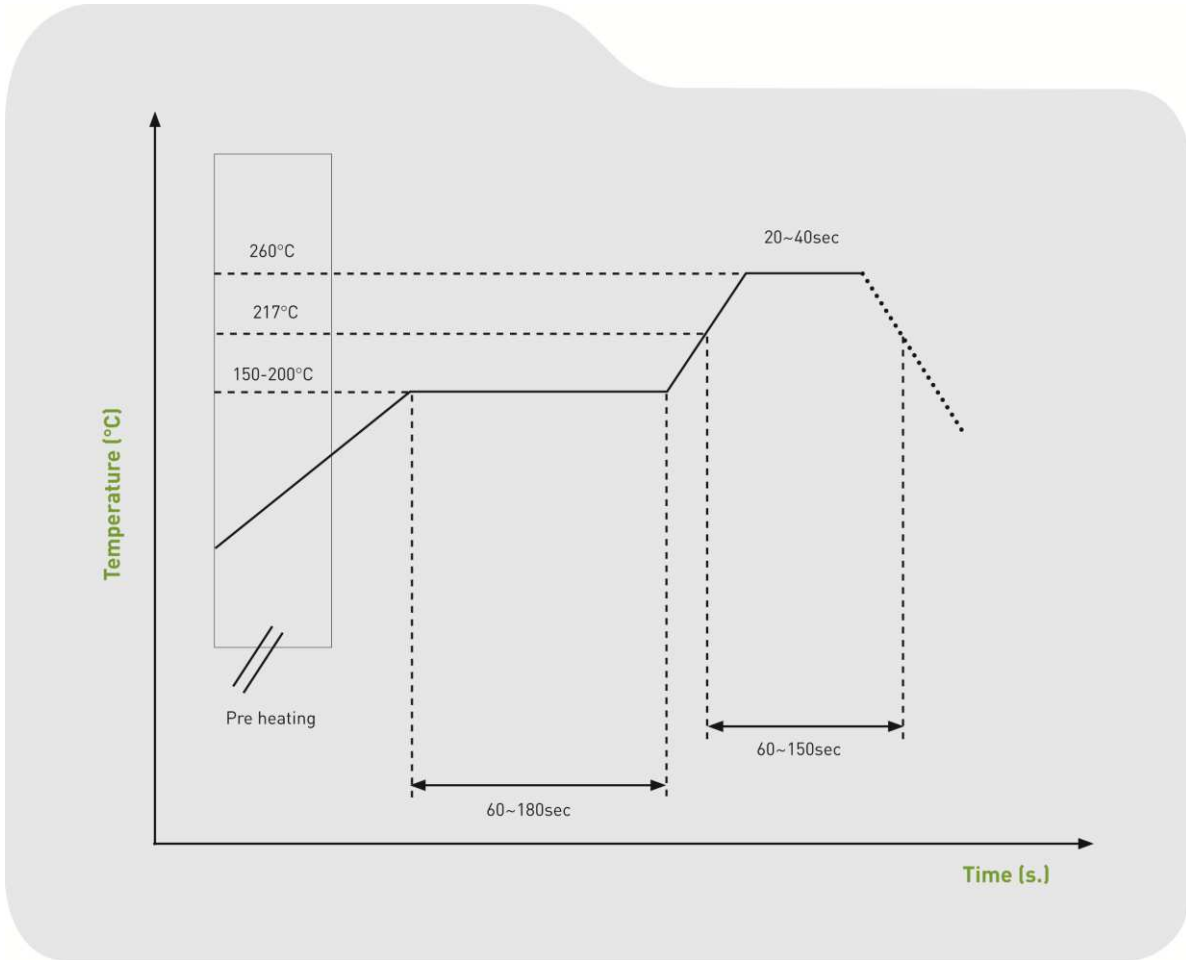

10. Packing

Quantity: 1000pcs/ Reel

H: Reel Height =

