



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CATTEN-01R5-BNC

1.5dB Attenuator

BNC 50 Ohm

DC to 1 GHz



Temperature Range: -40°C to +85°C
 Rated Power: 2 Watts Max
 Frequency Range: DC to 1 GHz
 VSWR: 1:1.3 Max
 Impedance: 50 Ohms
 Attenuation Tolerance: ±0.3 dB

The Attenuator offers end users a rugged BNC attenuator housing for easy connection. The CATTEN-01R5-BNC provides 2 Watts of power dissipation. Tolerance matching is used to provide superior temperature tracking to individual components. Attenuator frequency range is from DC to 1 GHz.

Product Control:

Crystek Part Number:	CATTEN-01R5-BNC	Release Date:	02-Feb-2016
Revision Level:	C	Responsible:	K. Piotrowicz

CATTEN-01R5-BNC

1.5dB Attenuator


BNC 50 Ohm



DC to 1 GHz

Part Number	Attenuation (dB)	Max Power (Watts)
CATTEN-01R0-BNC	1.0	2
CATTEN-01R5-BNC	1.5	2
CATTEN-02R0-BNC	2.0	2
CATTEN-03R0-BNC	3.0	2
CATTEN-04R0-BNC	4.0	2
CATTEN-05R0-BNC	5.0	2
CATTEN-06R0-BNC	6.0	2
CATTEN-07R0-BNC	7.0	2
CATTEN-08R0-BNC	8.0	2
CATTEN-09R0-BNC	9.0	2
CATTEN-0100-BNC	10.0	2
CATTEN-0150-BNC	15.0	2
CATTEN-0200-BNC	20.0	2

1.5 dB Data		Return Loss (dB)
Freq. (MHz)	Atten (dB)	
0.3	1.4	45.2
5.3	1.4	42.8
40.3	1.4	40.8
70.3	1.4	38.6
90.3	1.4	37.2
100.3	1.4	36.6
110.3	1.4	36.0
160.3	1.4	33.5
200.2	1.4	32.0
250.2	1.5	30.4
300.2	1.5	29.0
350.2	1.5	27.6
400.2	1.5	26.2
450.2	1.5	24.9
500.2	1.6	23.8
550.1	1.6	22.8
600.1	1.6	22.1
650.1	1.6	21.6
700.1	1.6	21.4
800.1	1.7	21.1
900.0	1.7	20.4
1000.0	1.7	19.2

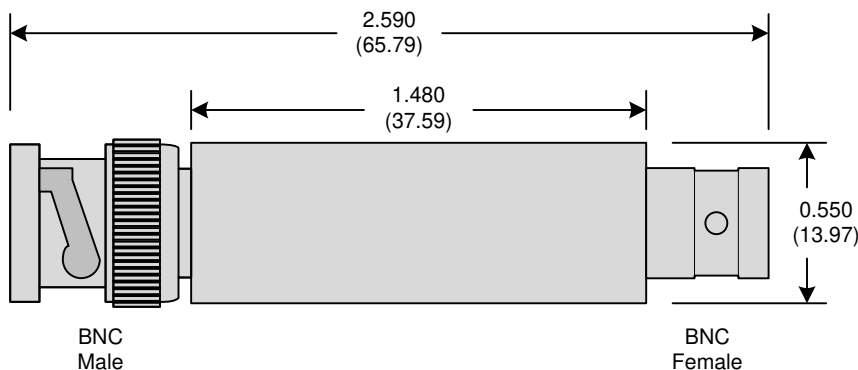

Rev C