



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

CATTEN-07R0 7dB Attenuator SMA 50 Ohm DC to 3GHz



Actual Size

Temperature Range:	-40°C to +85°C
Rated Power:	1 Watt Max
Freq Range:	DC - 3GHz
VSWR:	1:1.3 Max
Impedance:	50 Ohms
Attenuation Tolerance:	±0.4 dB Typical

The Attenuator offers end users a rugged SMA attenuator housing for easy connection. The CATTEN-07R0 provides 1 Watt of power dissipation. Tolerance matching is used to provide superior temperature tracking to individual components. Attenuator frequency range is from DC to 3GHz.



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev: C
Date: 08-27-08



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

CATTEN-07R0


7dB Attenuator

SMA 50 Ohm

DC to 3GHz

Part Number	Attenuation	Power (Max)
CATTEN-01R0	1 dB	1 Watt
CATTEN-01R5	1.5 dB	1 Watt
CATTEN-02R0	2 dB	1 Watt
CATTEN-03R0	3 dB	1 Watt
CATTEN-04R0	4 dB	1 Watt
CATTEN-05R0	5 dB	1 Watt
CATTEN-06R0	6 dB	1 Watt
CATTEN-07R0	7dB	1 Watt
CATTEN-08R0	8dB	1 Watt
CATTEN-09R0	9dB	1 Watt
CATTEN-0100	10 dB	1 Watt
CATTEN-0150	15 dB	0.5 Watt
CATTEN-0200	20 dB	0.5 Watt

7 dB Data		Return Loss	
Freq. (MHz)	Atten (dB)	Male (dB)	Female (dB)
0.3	7.06	63	62
0.5	7.06	62	62
0.8	7.06	62	62
1.0	7.07	62	61
5.0	7.07	61	61
10.0	7.08	59	59
20.0	7.08	56	56
50.0	7.08	50	51
100.0	7.08	45	45
200.0	7.09	40	40
300.0	7.10	37	36
400.0	7.15	35	34
500.0	7.11	34	32
600.0	7.10	33	31
700.0	7.10	32	30
800.0	7.11	31	28
900.0	7.12	30	28
1000.0	7.13	29	27
1500.0	7.16	25	23
2000.0	7.25	22	21
2500.0	7.30	20	19
3000.0	7.39	18	17

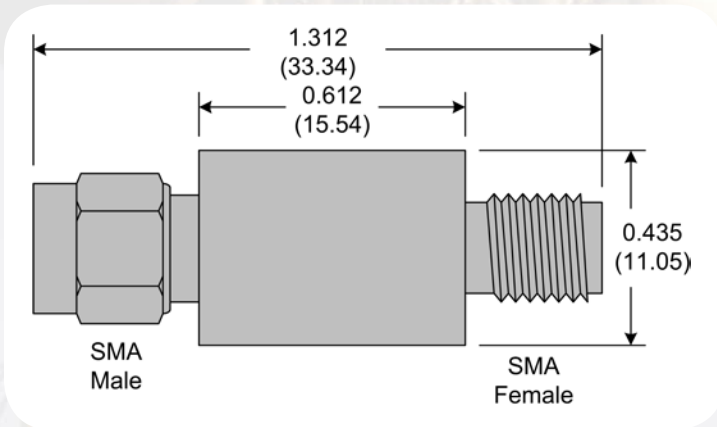

TEST	Condition of Test	Test Results	
		0.5dB to 5dB	6dB to 20dB
Endurance Test at 70°C per EIA 575-3.14	1000 hours at 70°C, 1.5 hrs "ON", 0.5 hrs "OFF"	± 0.2 dB	± 0.3 dB
Overload per EIA 575-3.6	Short time overload	± 0.2 dB	± 0.3 dB
Thermal Shock	per EIA 575-3.5	± 0.2 dB	± 0.3 dB
Moisture Resistance	per EIA 575-3.10	± 0.2 dB	± 0.3 dB
High Temperature Exposure	per EIA 575-3.7	± 0.2 dB	± 0.3 dB
Low Temperature Exposure	per EIA 575-3.12	± 0.2 dB	± 0.3 dB



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913

PHONE: 239-561-3311 • 800-237-3061

FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: C
Date: 08-27-08