

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Features

- RoHS compliant*
- 2/4 isolated resistors in an 0404/0804 size package
- E24 series from 10 ohms to 1 megohm
- Convex termination style
- Resistance tolerance ±5 %
- Suitable for all types of soldering processes

■ Paper tape on reel for automatic placement

Model CAY10 - Chip Resistor Array

Specifications

| Requirement | Characteristics | Test Method |
|-------------------------|-----------------|--|
| Short Time Overload | ±2 % | Rated Voltage X 2.5, 5 seconds |
| Soldering Heat | ±1 % | 260 °C ±5 °C, 10 seconds ±1 second |
| Temperature Cycling (5) | ±1 % | 125 °C (30 minutes) - normal (15 minutes) -30 °C (30 minutes) - normal (15 minutes) |
| Moisture Load Life | ±3 % | 1000 hours |
| Load Life | ±3 % | 1000 hours |

Characteristics

| Characteristics | CAY10-xxxJ2 | CAY10-xxxJ4 |
|--|------------------------|-------------|
| Number of Elements (Isolated) | 2 | 4 |
| Power Rating @ 70 °C per Resistor | 0.0625 W | 0.0625 W |
| Package Power Rating @ 70 °C | 0.125 W | 0.250 W |
| Resistance Tolerance | ±5 % | |
| Resistance Range (E24) plus Zero-ohm Jumper | 10 ohms - 1 megohm | |
| T.C.R. | ±250 ppm/°C | |
| Max. Overload Voltage | 50 V | |
| Max. Working Voltage | 25 V | |
| Operating Temp. Range | -55 °C to +125 °C | |
| Rating Temperature | +70 °C | |
| Packaging | 10,000 pieces per reel | |

How To Order

CA Y 10 - 103 J 4 LF Chip Arrays Type • Y = Convex Model • 10 = 04 Package Width Resistance Code • <10 ohms: "R" represents decimal point (example: 4R7 = 4.7 ohms). · ≥10 ohms: First two digits are signifi-

- cant, third digit represents number of zeros to follow (example: 474 = 470k ohms
- 000 = Zero-ohm Jumper

Resistance Tolerance • $J = \pm 5 \%$

Resistors -

• 2 = 2 Resistors


• 4 = 4 Resistors

Terminations


• LF = Tin-plated (RoHS compliant)

For Standard Values Used in Capacitors, Inductors, and Resistors, click here.

Characteristics



Derating Curve



Typical Part Marking


None on part. Label on reel will include part number.

Isolated Circuit

CAY10-xxxJ2



CAY10-xxxJ4




^{*}RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011. Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.


Model CAY10 - Chip Resistor Array


BOURNS®


Soldering Profile for RoHS Compliant Chip Resistors and Arrays

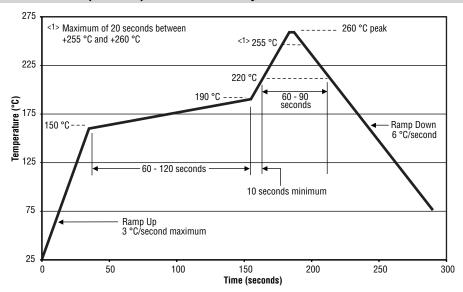

Product Dimensions

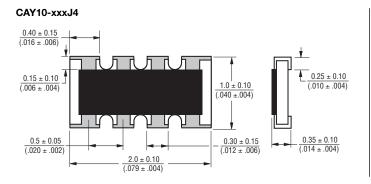







Land Pattern



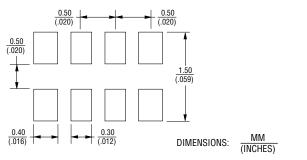


CAY10-xxxJ2




Model CAY10 - Chip Resistor Array

BOURNS®

Packaging Dimensions

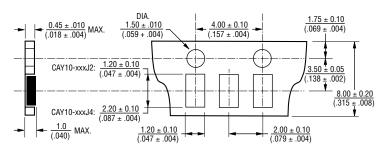

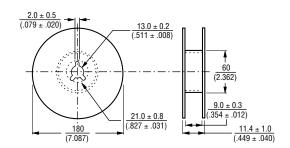

DIMENSIONS: $\frac{MM}{(INCHES)}$