



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Through-Hole Ceramic Capacitors

150°C Aximax



Why Choose KEMET

KEMET Corporation is a leading global supplier of electronic components. We offer our customers the broadest selection of capacitor technologies in the industry, along with an expanding range of electromechanical devices, electromagnetic compatibility solutions and supercapacitors. Our vision is to be the preferred supplier of electronic component solutions for customers demanding the highest standards of quality, delivery and service.

Features & Benefits

- Automotive Grade available
- Pb-Free and RoHS compliant
- Base metal electrode (BME) dielectric system
- Low ESR and ESL
- High thermal stability
- Flex crack resistance
- Improved piezoelectric properties over surface mount technology
- SnPb lead finish option available upon request
- Ultra-Stable X8R dielectric:
 - No capacitance change with respect to applied DC voltage
 - Negligible capacitance change with respect to temperature


Product Checklist

- What is the end application?
- Do you require an axial footprint?
- What are the dimensional requirements?
- Is board space constrained?
- Is the application temperature above 125°C?
- Does your application require a voltage and temperature stable dielectric solution?
- What capacitance is required at operating temperature?
- What is the application voltage at operating temperature?

For more information, samples and engineering kits, please visit us at www.kemet.com or call 1.877.myKEMET.

Programs Supported

- Power supplies
- Security/alarms
- Consumer appliances
- Automotive
- Medical
- Telecommunications
- Test and industrial equipment
- Bypass
- Signal coupling
- Switching mode power supply
- Decoupling
- Noise filters
- Snubbers
- Down-hole exploration
- Automotive (under-the-hood)

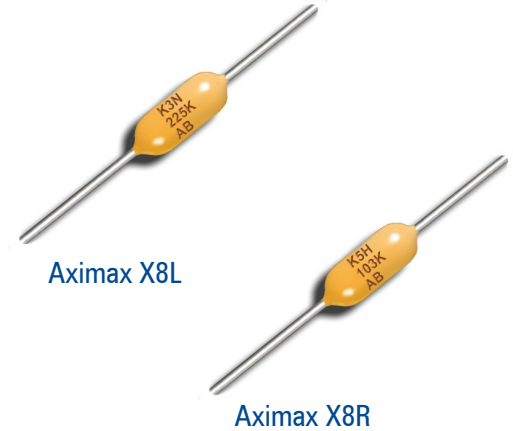

Electrical/Physical Characteristics

Style/Size	Tolerances	Dielectric	Temperature Range	Voltage Options	Values
410	F	Ultra-Stable	-55°C to 150°C	25	100 pF to 0.82 μF
430	G	X8R, X8L		50	
	J			100	
	K			200	
	M				

Ordering Information

C	410	C	105	K	3	H	5	T	A	7200
Ceramic	Style/Size	Specification/Series	Capacitance Code (pF)	Capacitance Tolerance	Voltage	Dielectric	Design	Lead Finish	Failure Rate	Packaging/Grade (C-Spec)
	410 430	C = Standard	2 Sig. Digits + Number of Zeros.	F = ±1% G = ±2% J = ±5% K = ±10% M = ±20%	3 = 25 V 5 = 50 V 1 = 100 V 2 = 200 V	H = Ultra-Stable X8R N = X8L	5 = Multilayer	T = 100% Matte Sn H = SnPb (60/40)	A = N/A	Blank = Bulk 7200 = 12" Reel AUTO = Automotive Grade

Dimension Table

Style/Size	L Max.	D Max.	LD +0.001 (0.025) -0.003 (0.076)	LL Min.
C410	0.170 (4.32)	0.100 (2.54)	0.020 (0.51)	1.0 (25.4)
C430	0.240 (6.10)	0.150 (3.81)	0.020 (0.51)	1.0 (25.4)

