



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





CRYSTEK
MICROWAVE
 A DIVISION OF CRYSTEK CORPORATION

12 GHz HAND FORMABLE .086 COAX CABLES




50 Ohm DC-12 GHz Hand Formable Coaxial Cables

Features:

- Center Conductor:** Silver-plated copper clad steel wire
- Outer Braid:** Tin-soaked copper braid, 100% coverage
- Insulation:** PTFE (Polytetrafluoroethylene) dielectric
- Cable Outer Dia.:** 0.086" (2.2mm)
- Connectors:** Gold plated brass
- Center Pin:** Gold plated brass
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 0.24" (6mm) single bend
0.99" (25mm) multiple bends

Electrically Matched Pairs Available

PN: CCSMA-MM-086-3
 INSERTION LOSS

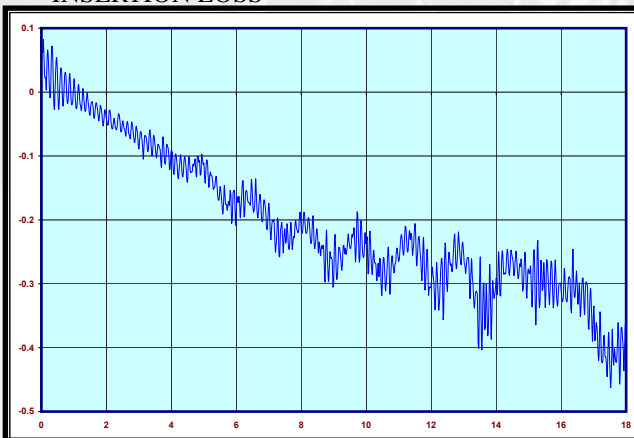

Electrical Specifications:

- Impedance:** 50 Ohms
- Frequency:** DC to 12 GHz
- Insertion Loss:** <0.82 dB/ft at 12 GHz
- VSWR:** <1.3, DC to 12 GHz
- Nominal Capacitance:** 28.6 pF/ft
- Velocity of Propagation:** 70%
- RF Shielding:** < -130 dB
- Attenuation (dB/ft):** 0.30 Typ. at 2 GHz
0.46 Typ. at 4 GHz
0.70 Typ. at 8 GHz
0.76 Typ. at 10 GHz
0.82 Typ. at 12 GHz

- Avg. Power in (Watts):** 900 @ 100 MHz
200 @ 1 GHz
50 @ 10 GHz

- Applications:** Jumpers
Instrumentation
High Frequency Interconnects



SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCSMA-MM-086-3	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	3"
CCSMA-MM-086-4	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	4"
CCSMA-MM-086-5	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	5"
CCSMA-MM-086-6	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	6"
CCSMA-MM-086-7	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	7"
CCSMA-MM-086-8	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	8"
CCSMA-MM-086-10	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	10"
CCSMA-MM-086-12	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	12"
CCSMA-MM-086-18	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	18"
CCSMA-MM-086-24	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	24"



CRYSTEK
 CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913

PHONE: 239-561-3311 • 800-237-3061 Rev.: F

FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 07-18-11