



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

18 GHz HAND FORMABLE .141 COAX CABLES

50 Ohm DC-18 GHz Hand Formable Coaxial Cables



Features:

- Center Conductor:** Silver-plated copper clad steel wire
- Outer Braid:** Tin-soaked copper braid, 100% coverage
- Insulation:** PTFE (Polytetrafluoroethylene) dielectric
- Cable Outer Dia.:** 0.141 (3.58mm)
- Connectors:** Gold plated brass
- Center Pin:** Gold plated brass
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 0.39" (10mm) single bend
1.57" (40mm) multiple bends

Electrical Specifications:

- Impedance:** 50 Ohms
 - Frequency:** DC to 18 GHz
 - Insertion Loss:** <.67 dB/ft at 18 GHz
 - VSWR:** <1.3, DC to 18 GHz
 - Nominal Capacitance:** 28.6 pF/ft
 - Velocity of Propagation:** 70%
 - RF Shielding:** < -130 dB Typical
 - Attenuation (dB/ft):** 0.12 Typ. at 1 GHz
0.23 Typ. at 3 GHz
0.31 Typ. at 5 GHz
0.46 Typ. at 10 GHz
0.65 Typ. at 18 GHz
- *connector loss not included
(refer to actual cable plot (see below))

- Avg Power in (Watts):** 686 @ 400 MHz
419 @ 1 GHz
122 @ 10 GHz
83 @ 18 GHz
- *as specified at 40°C


- Applications:** Jumpers
Instrumentation
High Frequency Interconnects



Custom Lengths Available

Electrically Matched Pairs Available

Actual Plot

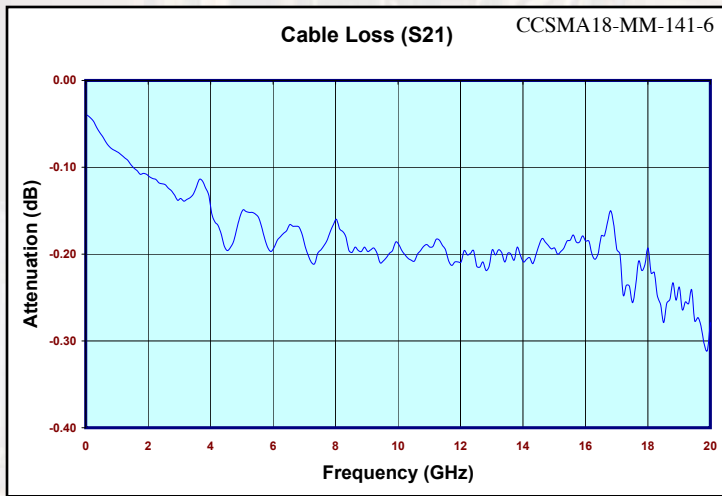

SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCSMA18-MM-141-3	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	3"
CCSMA18-MM-141-4	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	4"
CCSMA18-MM-141-5	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	5"
CCSMA18-MM-141-6	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	6"
CCSMA18-MM-141-7	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	7"
CCSMA18-MM-141-8	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	8"
CCSMA18-MM-141-10	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	10"
CCSMA18-MM-141-12	.141 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	12"



12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: A
Date: 07-29-11