



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



*RoHS COMPLIANT



BOURNS®

Features

- Lead free
- RoHS compliant*
- Low profile package
- Surface mount
- Very low forward voltage drop



This series is currently available but not recommended for new designs.

CD1607-B140 / B140L Schottky Barrier Rectifier Chip Diode

General Information

The markets of portable communications, computing and video equipment are challenging the semiconductor industry to develop increasingly smaller electronic components.

Bourns offers Schottky Rectifier Diodes for rectification applications, in compact chip package 1607 (Mini-SMA) size format, which offer PCB real estate savings and are considerably smaller than competitive parts. The Schottky Rectifier Diodes offer a forward current of 1 A with a repetitive peak reverse voltage of 40 V.

Bourns® Chip Diodes conform to JEDEC standards, easy to handle on standard pick and place equipment and their flat configuration makes roll away much more difficult.

Electrical Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	CD1607-		Unit
		B140	B140L	
Forward Voltage (Max.) (I _f = 1 A)	V _F	0.5	0.4	V
Typical Junction Capacitance*	C _T	110	110	pF
Reverse Current (Max.) at Rated V _R	I _R	0.5	1.0	mA

* Measured at 1.0 MHz and applied reverse voltage of 4.0 V DC.

Absolute Ratings (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	CD1607-		Unit
		B140	B140L	
Repetitive Peak Reverse Voltage	V _{RRM}	40	40	V
Reverse Voltage	V _R	40	40	V
Maximum RMS Voltage	V _{RMS}	28	28	V
Avg. Forward Current	I _O	1		A
Forward Current, Surge Peak (60 Hz, 1 cycle)	I _{surge}	30*		A
Typical Thermal Resistance**	R _{θJL}	20		°C/W
Storage Temperature	T _{STG}	-55 to +150		°C
Junction Temperature	T _J	-55 to +125		°C

** Thermal resistance junction to lead.

* Condition: 8.3 ms single half sine-wave superimposed on rate load (JEDEC method).

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

EMEA: Tel: +36 88 520 390 • Fax: +36 88 520 211

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

How To Order


Common Code	_____	CD 1607 - B 1 40 L LF
Chip Diode	_____	
Package	_____	
• 1607 = Mini-SMA		
Model	_____	
B = Schottky Barrier Series		
Average Forward Current (I _O) Code	_____	
1 = 1 A (Code x 1000 mA = Average Forward Current)		
Reverse Voltage (V _R) Code	_____	
40 = 40 V		
Forward Voltage Suffix	_____	
L = Low Forward Voltage V _f		
Terminations	_____	
LF = 100 % Sn (lead free)		

Applications

- Cellular phones
- PDAs
- Desktop PCs and notebooks
- Digital cameras
- MP3 players

CD1607-B140 / B140L Schottky Barrier Rectifier Chip Diode **BOURNS®**


Product Dimensions

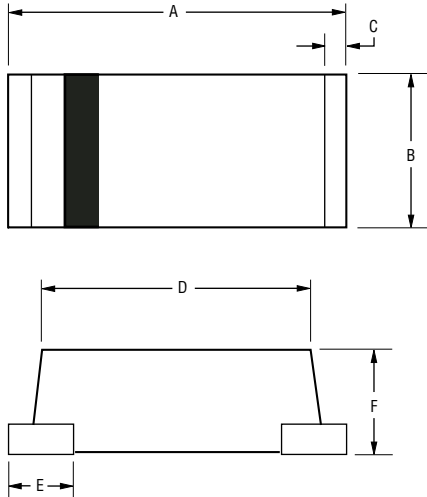

Dimension	Mini-SMA
A	$\frac{3.70 - 4.10}{(0.146 - 0.161)}$
B	$\frac{1.40 - 1.80}{(0.055 - 0.071)}$
C	$\frac{0.30}{(0.012)}$ TYP.
D	$\frac{2.40 - 2.80}{(0.094 - 0.110)}$
E	2 PLCS. $\frac{0.90}{(0.035)}$ TYP.
F	$\frac{1.40 - 1.60}{(0.055 - 0.063)}$

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Recommended Pad Layout

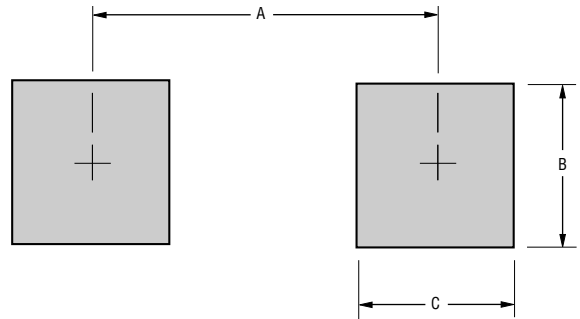

Dimension	Mini-SMA
A (Max.)	$\frac{3.50}{(0.138)}$
B (Min.)	$\frac{1.50}{(0.059)}$
C (Min.)	$\frac{1.50}{(0.059)}$

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Physical Specifications

Case.....1607 Molded plastic
 PolarityColor band denotes cathode end
 Terminals.....Solderable per MIL-STD-750, Method 206
 WeightApproximately 0.04 grams

Typical Part Marking

CD1607-B140I4
 CD1607-B140LI4


Specifications are subject to change without notice.
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
 Users should verify actual device performance in their specific applications.

CD1607-B140 / B140L Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD1607-B140


Forward Characteristics

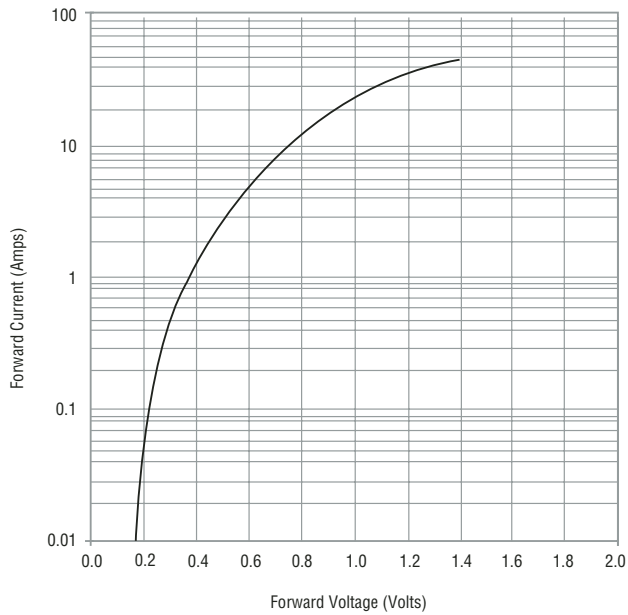


Reverse Characteristics

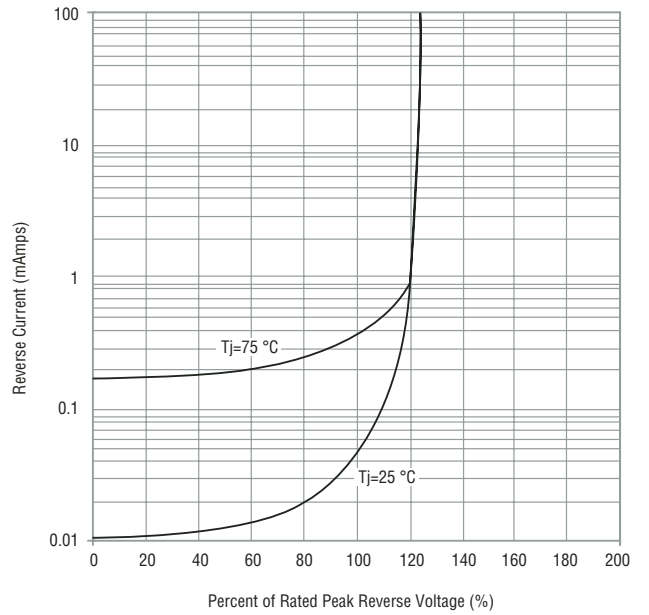

Derating Curve

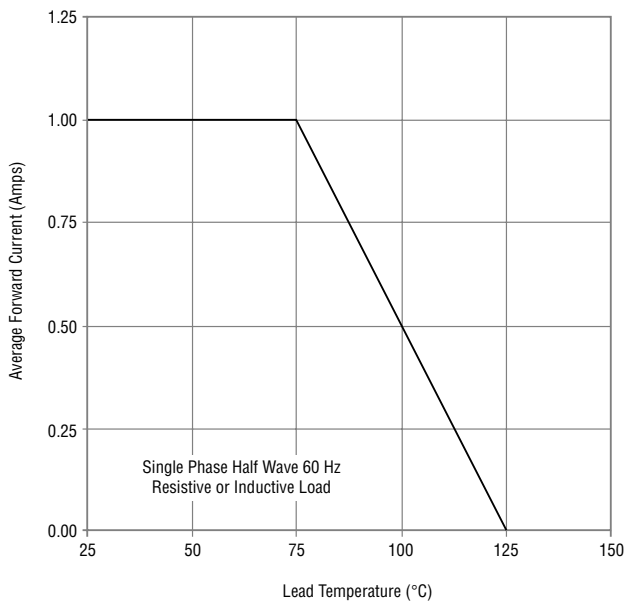

Capacitance Between Terminals

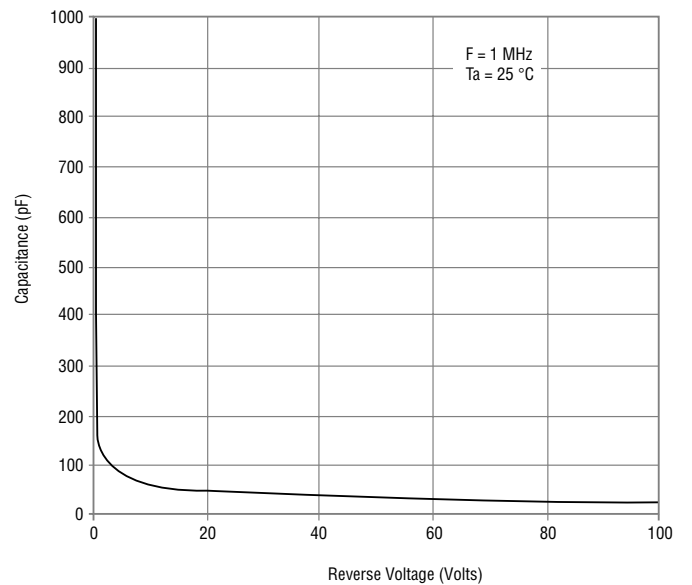


Specifications are subject to change without notice.
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
 Users should verify actual device performance in their specific applications.

CD1607-B140 / B140L Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD1607-B140L


Forward Characteristics

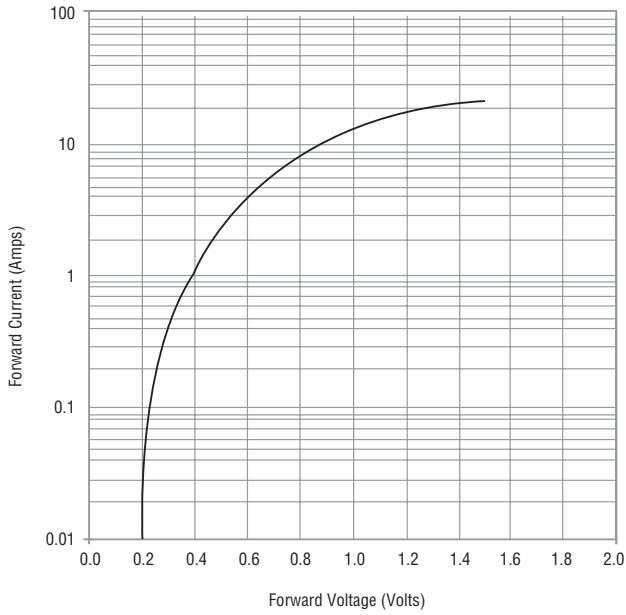


Reverse Characteristics

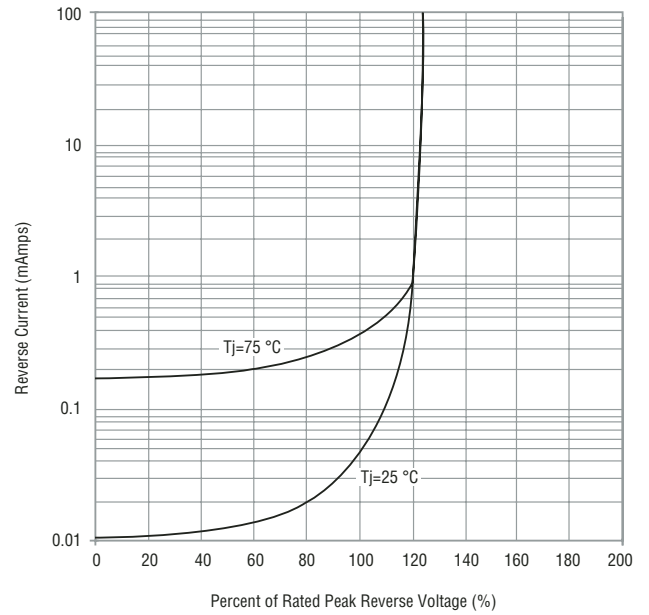

Derating Curve

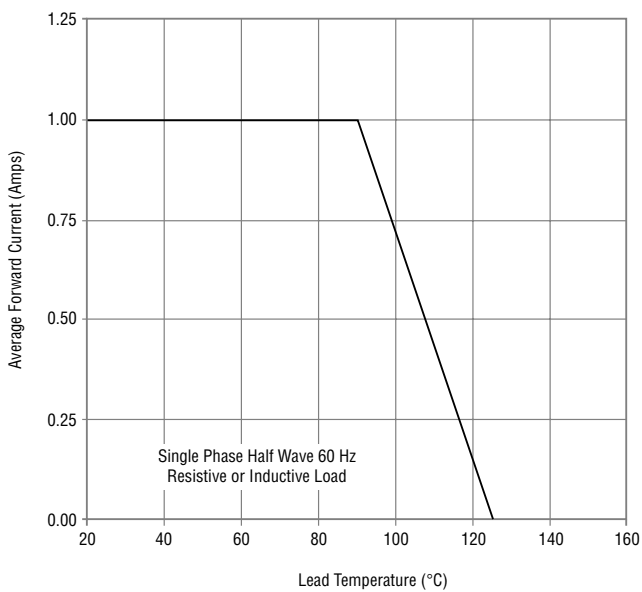

Capacitance Between Terminals

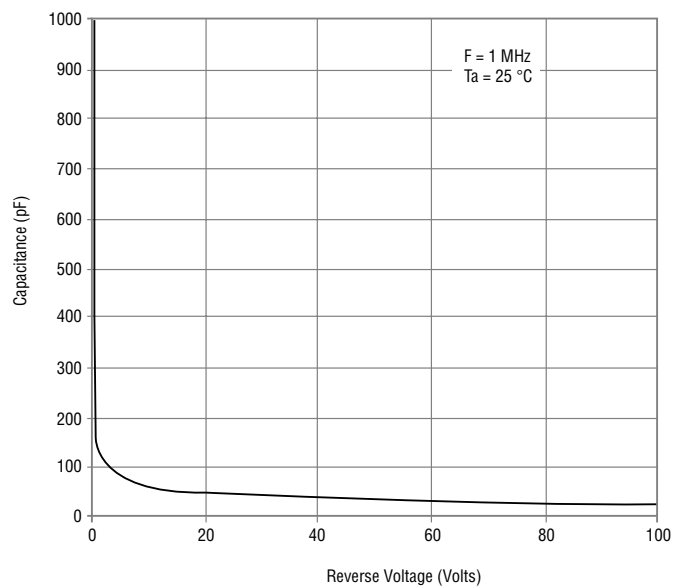


Specifications are subject to change without notice.
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
 Users should verify actual device performance in their specific applications.

CD1607-B140 / B140L Schottky Barrier Rectifier Chip Diode

BOURNS®

Packaging Information

The product will be dispensed in Tape and Reel format (see diagram below).

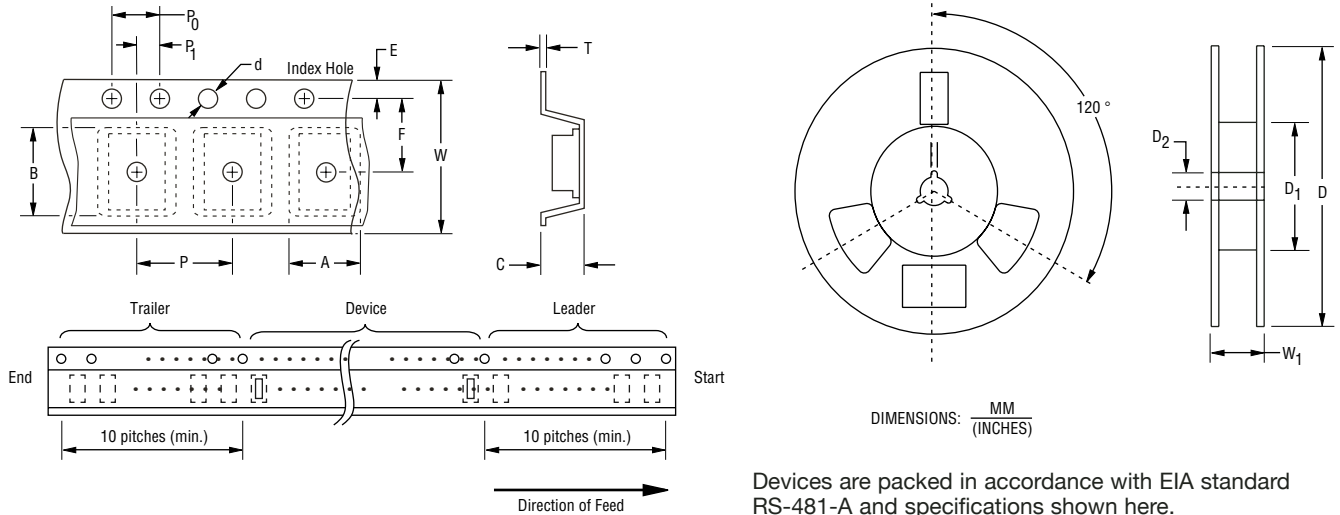

Item	Symbol	1607
Carrier Width	A	$\frac{1.90 \pm 0.10}{(0.075 - 0.004)}$
Carrier Length	B	$\frac{4.30 \pm 0.10}{(0.169 - 0.004)}$
Carrier Depth	C	$\frac{1.80 \pm 0.10}{(0.071 - 0.004)}$
Sprocket Hole	d	$\frac{1.55 \pm 0.05}{(0.061 - 0.002)}$
Reel Outside Diameter	D	$\frac{178}{(7.008)}$
Reel Inner Diameter	D ₁	$\frac{80.0}{(3.150)}$ MIN.
Feed Hole Diameter	D ₂	$\frac{13.0 \pm 0.20}{(0.512 - 0.008)}$
Sprocket Hole Position	E	$\frac{1.75 \pm 0.10}{(0.069 - 0.004)}$
Punch Hole Position	F	$\frac{3.50 \pm 0.05}{(0.138 - 0.002)}$
Punch Hole Pitch	P	$\frac{4.00 \pm 0.10}{(0.157 - 0.004)}$
Sprocket Hole Pitch	P ₀	$\frac{4.00 \pm 0.10}{(0.157 - 0.004)}$
Embossment Center	P ₁	$\frac{2.00 \pm 0.05}{(0.079 - 0.002)}$
Overall Tape Thickness	T	$\frac{0.20 \pm 0.10}{(0.008 - 0.004)}$
Tape Width	W	$\frac{8.00 \pm 0.20}{(0.315 - 0.008)}$
Reel Width	W ₁	$\frac{13.5}{(0.531)}$ MAX.
Quantity per Reel	--	2,500

REV. 12/15

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.