



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CS1501 90W, High-efficiency PFC Demonstration Board

Features


- ❑ Variable On Time, Variable Frequency, DCM PFC Controller
- ❑ Line Voltage Range: 90 to 265 VAC RMS
- ❑ Output voltage: 400 V
- ❑ Rated Pout: 90 W
- ❑ Efficiency: 97% @ 90 W, 230 VAC
- ❑ No-load Power Dissipation: <0.3 W
- ❑ Low Component Count
- ❑ Supports Cirrus Logic Product CS1501

General Description

The CDB150x-01 board demonstrates the performance of the CS1501 digital PFC controller with a 90 watt output at a link voltage of 400 volts.

ORDERING INFORMATION

CDB150x-01 PFC Demonstration Board - Supports CS1501

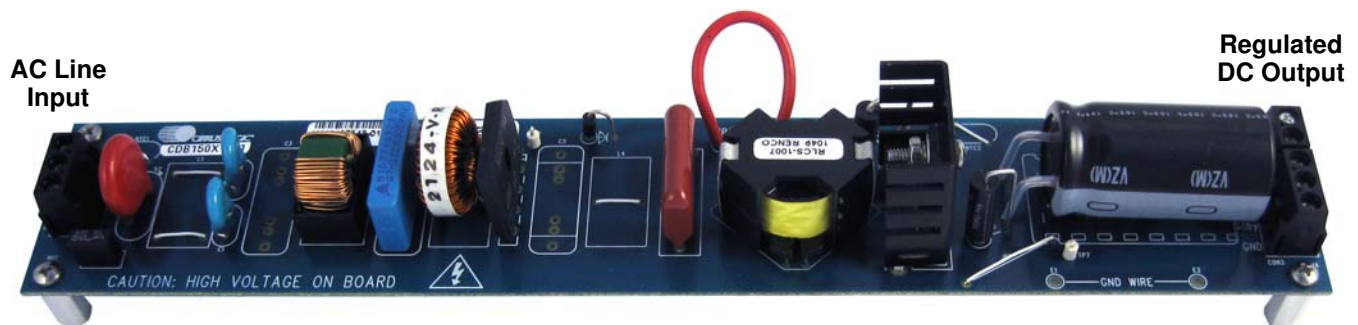

Actual Size:
254mm x 44mm



IMPORTANT SAFETY INSTRUCTIONS

Read and follow all safety instructions prior to using this demonstration board.

This Engineering Evaluation Unit or Demonstration Board must only be used for assessing IC performance in a laboratory setting. This product is not intended for any other use or incorporation into products for sale.

This product must only be used by qualified technicians or professionals who are trained in the safety procedures associated with the use of demonstration boards.

⚠ DANGER Risk of Electric Shock

- The direct connection to the AC power line and the open and unprotected boards present a serious risk of electric shock and can cause serious injury or death. Extreme caution needs to be exercised while handling this board.
- Avoid contact with the exposed conductor or terminals of components on the board. High voltage is present on exposed conductor and it may be present on terminals of any components directly or indirectly connected to the AC line.
- Dangerous voltages and/or currents may be internally generated and accessible at various points across the board.
- Charged capacitors store high voltage, even after the circuit has been disconnected from the AC line.
- Make sure that the power source is off before wiring any connection. Make sure that all connectors are well connected before the power source is on.
- Follow all laboratory safety procedures established by your employer and relevant safety regulations and guidelines, such as the ones listed under, OSHA General Industry Regulations - Subpart S and NFPA 70E.

⚠ WARNING Suitable eye protection must be worn when working with or around demonstration boards. Always comply with your employer's policies regarding the use of personal protective equipment.

⚠ WARNING All components, heat sinks or metallic parts may be extremely hot to touch when electrically active.

⚠ WARNING Heatsinking is required for Q1. The end product should use tar pitch or an equivalent compound for this purpose. For lab evaluation purposes, a fan is recommended to provide adequate cooling.

Contacting Cirrus Logic Support

For all product questions and inquiries contact a Cirrus Logic Sales Representative. To find the one nearest to you go to www.cirrus.com

IMPORTANT NOTICE

Cirrus Logic, Inc. and its subsidiaries ("Cirrus") believe that the information contained in this document is accurate and reliable. However, the information is subject to change without notice and is provided "AS IS" without warranty of any kind (express or implied). Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. No responsibility is assumed by Cirrus for the use of this information, including use of this information as the basis for manufacture or sale of any items, or for infringement of patents or other rights of third parties. This document is the property of Cirrus and by furnishing this information, Cirrus grants no license, express or implied under any patents, mask work rights, copyrights, trademarks, trade secrets or other intellectual property rights. Cirrus owns the copyrights associated with the information contained herein and gives consent for copies to be made of the information only for use within your organization with respect to Cirrus integrated circuits or other products of Cirrus. This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). CIRRUS PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN PRODUCTS SURGICALLY IMPLANTED INTO THE BODY, AUTOMOTIVE SAFETY OR SECURITY DEVICES, LIFE SUPPORT PRODUCTS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF CIRRUS PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK AND CIRRUS DISCLAIMS AND MAKES NO WARRANTY, EXPRESS, STATUTORY OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, WITH REGARD TO ANY CIRRUS PRODUCT THAT IS USED IN SUCH A MANNER. IF THE CUSTOMER OR CUSTOMER'S CUSTOMER USES OR PERMITS THE USE OF CIRRUS PRODUCTS IN CRITICAL APPLICATIONS, CUSTOMER AGREES, BY SUCH USE, TO FULLY INDEMNIFY CIRRUS, ITS OFFICERS, DIRECTORS, EMPLOYEES, DISTRIBUTORS AND OTHER AGENTS FROM ANY AND ALL LIABILITY, INCLUDING ATTORNEYS' FEES AND COSTS, THAT MAY RESULT FROM OR ARISE IN CONNECTION WITH THESE USES.

Cirrus Logic, Cirrus, and the Cirrus Logic logo designs are trademarks of Cirrus Logic, Inc. All other brand and product names in this document may be trademarks or service marks of their respective owners.

1. INTRODUCTION

The CS1501 is a high-performance Variable Frequency Discontinuous Conduction Mode (VF-DCM), active Power Factor Correction (PFC) controller, optimized to deliver the lowest system cost in switched mode power supply (SMPS) applications. The CS1501 uses a digital control algorithm that is optimized for high efficiency and near-unity power factor over a wide input voltage range (90-265 VAC).

Using an adaptive digital control algorithm, both the ON time and the switching frequency are varied on a cycle-by-cycle basis over the entire AC line to achieve close-to-unity power factor. The feedback loop is closed through an integrated digital control system within the IC.

The variation in switching frequency also provides a spread-frequency spectrum, thus minimizing the conducted EMI filtering requirements. Burst mode control minimizes the light-load/standby losses. Protection features such as overvoltage, overcurrent, overpower, open circuit, overtemperature, and brownout help protect the device during abnormal transient conditions. Details of these features are provided in the CS1501 data sheets.

The CDB150x-01 board demonstrates the performance of the CS1501 with input voltage range of 90-265 VAC, typically seen in universal input applications. This board has been designed for 400V V_{link} , 90 Watts, full load.

Extreme caution needs to be exercised while handling this board. This board is to be used by trained professionals only. Prior to applying AC power to the CDB150x-01 board, the CS1501 needs to be biased using an external 13 VDC power supply.

This document provides the schematic for the board. It includes oscilloscope screen shots that indicate operating waveforms. Graphs are also provided that document the performance of the board in terms of Efficiency vs. Load, Total Harmonic Distortion vs. Load, and Power Factor vs. Load for the CS1501 PFC controller IC.




CIRRUS LOGIC®

CDB150X-01


2. SCHEMATIC

ECO#	REV	DESCRIPTION	INC BY/DATE	CHK BY/DATE
ECO806	A	INITIAL RELEASE	9/17/10	9/17/10
ECO819	B	CHANGED L5 TO NEW FOOTPRINT		12/9/10
ECO819	B1	CHANGED R6 FROM 17.8K TO 48.7K	01/05/11	

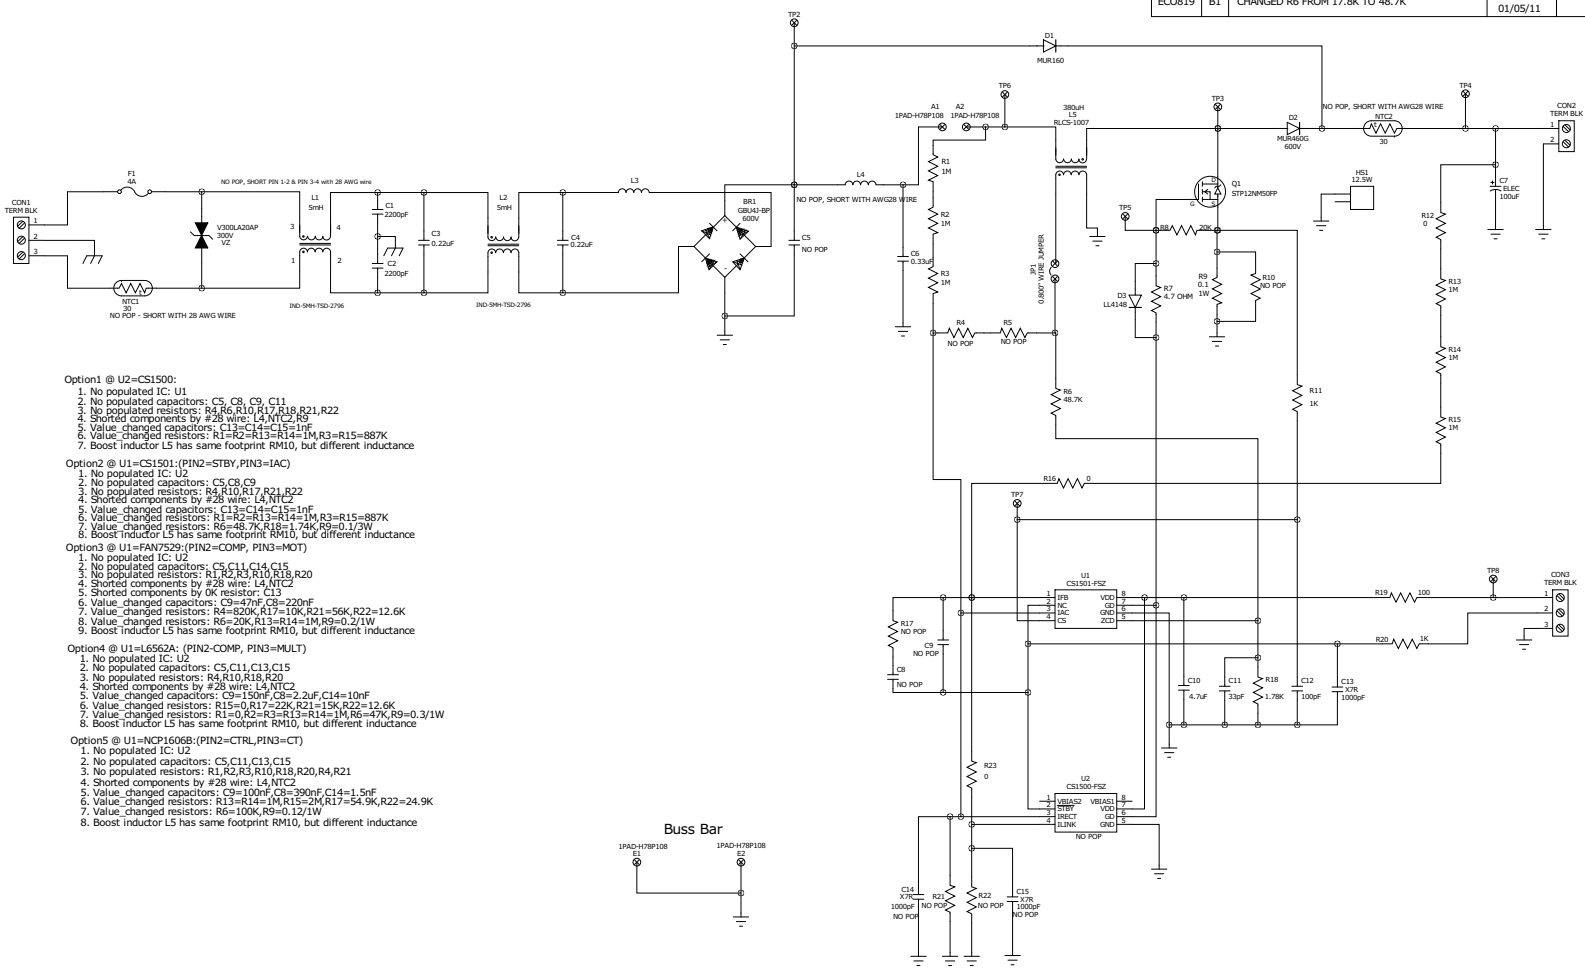

- Option1 @ U2=CS1500:
1. No populated IC: U1
 2. No populated capacitors: C5, C8, C9, C11
 3. No populated resistors: R4, R6, R10, R17, R18, R21, R22
 4. Shorted components by #28 wire: L4, NTC2
 5. Value changed capacitors: C13=C14=C15=1nF
 6. Value changed resistors: R1=R2=R13=R14=1M, R3=R15=887K
 7. Boost inductor L5 has same footprint RM10, but different inductance
- Option2 @ U1=CS1501:(PIN2=STBY, PIN3=IAC)
1. No populated IC: U2
 2. No populated capacitors: C5, C8, C9
 3. No populated resistors: R4, R10, R17, R21, R22
 4. Shorted components by #28 wire: L4, NTC2
 5. Value changed capacitors: C13=C14=C15=1nF
 6. Value changed resistors: R1=R2=R13=R14=1M, R3=R15=887K
 7. Value changed resistors: R6=48.7K, R18=1.74K, R9=0.1/3W
 8. Boost inductor L5 has same footprint RM10, but different inductance
- Option3 @ U1=FAN525:(PIN2=COMP, PIN3=MOT)
1. No populated IC: U2
 2. No populated capacitors: C5, C11, C14, C15
 3. No populated resistors: R1, R2, R3, R10, R18, R20
 4. Shorted components by #28 wire: L4, NTC2
 5. Shorted components by 0K resistor: C13
 6. Value changed capacitors: C9=47nF, C8=220nF
 7. Value changed resistors: R4=820K, R17=10K, R21=56K, R22=12.6K
 8. Value changed resistors: R6=20K, R13=R14=1M, R9=0.2/1W
 9. Boost inductor L5 has same footprint RM10, but different inductance
- Option4 @ U1=L6562A:(PIN2=COMP, PIN3=MULT)
1. No populated IC: U2
 2. No populated capacitors: C5, C11, C13, C15
 3. No populated resistors: R1, R2, R3, R10, R18, R20, R4, R21
 4. Shorted components by #28 wire: L4, NTC2
 5. Value changed capacitors: C9=150nF, C8=2.2uF, C14=10nF
 6. Value changed resistors: R15=0, R17=22K, R21=15K, R2=12.6K
 7. Value changed resistors: R1=0, R2=R3=R13=R14=1M, R6=47K, R9=0.3/1W
 8. Boost inductor L5 has same footprint RM10, but different inductance
- Option5 @ U1=NCP1606B:(PIN2=CTRL, PIN3=CT)
1. No populated IC: U2
 2. No populated capacitors: C5, C11, C13, C15
 3. No populated resistors: R1, R2, R3, R10, R18, R20, R4, R21
 4. Shorted components by #28 wire: L4, NTC2
 5. Value changed capacitors: C9=100nF, C8=390nF, C14=1.5nF
 6. Value changed resistors: R13=R14=1M, R15=2M, R17=54.9K, R22=24.9K
 7. Value changed resistors: R6=100K, R9=0.12/1W
 8. Boost inductor L5 has same footprint RM10, but different inductance

NOTES: UNLESS OTHERWISE SPECIFIED;
 1. ALL RESISTOR VALUES ARE IN OHMS.



SCHEMATIC: 600-00473-ZZ
 ASSY DWG: 603-00473-Z1
 PCB DWG: 240-00473-Z1

SDREW: PHILIPS-440TR-PH-5/16-L-Z
 XHS: J2020-INDL-INDY-HEATSH-4T
 JBL SUBSIDIARY PROD ID AND REV
 JBL SUBSIDIARY PROD NUMBER

PART #: 600-00473-Z2	REV B1
DESCRIPTION: SCHEM., CDB150X-01	
SHEET TITLE: CS1501	
DRAWN BY: _____	ENGINEER: _____
DATE: 12/3/2010	SIZE C SHEET 1 OF 1

Figure 1. Schematic

CIRRUS LOGIC
CDB150X-01_Rev_C

BILL OF MATERIAL (Page 1 of 2)

Item	Cirrus P/N	Rev	Description	Qty	Reference Designator	MFG	MFG P/N	Notes
1	070-00157-Z1	A	DIODE RECT BRIDGE 600V 4A NPb GBU	1	BR1	MICRO COMMERCIAL CO	GBU4J-BP	
2	011-00042-Z1	A	CAP 2200pF ±10% 2000V CER NPb RAD	2	C1 C2	MURATA	DEBB33D222KA2B	
3	011-00055-Z1	A	CAP 0.22uF ±20% 305V PLY FLM NPb TH	0	C3	EPCOS	B32923C3224M	DO NOT POPULATE
4	011-00064-Z1	A	CAP 0.22uF ±20% 330V PLY FLM NPb TH	1	C4	EPCOS	B32912B3224M	ECO0841
5	011-00040-Z1	A	CAP 0.47uF ±20% 305V PLY FLM NPb TH	0	C5	EPCOS	B32922C3474M	DO NOT POPULATE
6	013-00034-Z1	A	CAP 0.33uF ±10% 630V POLY NPb RAD	1	C6	PANASONIC	ECQE6334KF	
7	012-00191-Z1	A	CAP 100UF ±20% 450V ELEC NPb RAD	1	C7	NICHICON	UVZ2W101MRD	
8	000-00009-Z1	A	NO POP CAP NPb 1206	0	C8 C9	NO POP	NP-CAP-1206	DO NOT POPULATE
9	001-10233-Z1	A	CAP 4.7uF ±20% 25V X7R NPb 1206	1	C10	TDK	C3216X7R1E475M	
10	001-05280-Z1	A	CAP 33pF ±5% 50V C0G NPb 1206	1	C11	KEMET	C1206C330J5GAC	
11	001-05542-Z1	A	CAP 100pF ±5% 50V C0G NPb 1206	1	C12	KEMET	C1206C101J5GAC	
12	001-06035-Z1	A	CAP 1000pF ±5% 50V X7R NPb 1206	1	C13	KEMET	C1206C102J5RAC	
13	001-06035-Z1	A	CAP 1000pF ±5% 50V X7R NPb 1206	0	C14 C15	KEMET	C1206C102J5RAC	DO NOT POPULATE
14	110-00301-Z1	A	CON 3POS TERM BLK 5.08mm SPR NPb RA	2	CON1 CON3	WEIDMULLER	1716030000	
15	110-00302-Z1	A	CON 2POS TERM BLK 5.08mm SPR NPb RA	1	CON2	WEIDMULLER	1716020000	
16	070-00132-Z1	A	DIODE RECT 800V 1A 200mA NPb DO-41	1	D1	DIODES INC	1N4006G-T	
17	070-00154-Z1	A	DIODE RECT 600V 4A NPb DO-201AD TH	1	D2	ON SEMICONDUCTOR	MUR460G	
18	070-00001-Z1	A	DIODE SS 75V 500mW NPb SOD80	1	D3	DIODES INC	LL4148	
19	180-00025-Z1	A	FUSE 4A SLO BLO 250V NPb RAD	1	F1	BELFUSE	RST 4	
20	311-00019-Z1	A	HTSNK W LOCK TAB .5" TO220 NPb	1	HS1	AAVID THERMALLOY	6021BG	REQUIRES 1 SCREW, 300-00025-Z1, 1 WASHER, 301-00013-Z1, 1 NUT, 302-00007-Z1
21	080-00013-Z1	A	WIRE 24 AWG SOLID PVC INS BLK NPb	1	JP1	ALPHA WIRE COMPANY	3050/1 BK005	SEE ASSY DWG FOR LENGTH
22	050-00039-Z1	A	XFMR 5mH 1:1 1500Vrms 4PIN NPb TH	0	L1	PREMIER MAGNETICS	TSD-2796	DO NOT POPULATE, SHORT PIN 1-2 & PIN 3-4 with 28 AWG wire
23	050-00039-Z1	A	XFMR 5mH 1:1 1500Vrms 4PIN NPb TH	1	L2	PREMIER MAGNETICS	TSD-2796	
24	040-00127-Z1	A	IND 1mH 1.3A ±15% TOR VERT NPb TH	1	L3	BOURNS	2124-V-RC	
25	040-00127-Z1	A	IND 1mH 1.3A ±15% TOR VERT NPb TH	0	L4	BOURNS	2124-V-RC	DO NOT POPULATE, SHORT WITH AWG28 WIRE
26	050-00051-Z1	A	XFMR 380uH 10:1 PFC BOOST NPb TH	1	L5	RENCO	RLCS-1007	ECO806
27	304-00004-Z1	A	SPCR STANDOFF 4-40 THR .500"L NPb	4	MH1 MH2 MH3 MH4	KEYSTONE	2203	REQUIRES SCREW 4-40X5X16" PH STEEL 300-00025-Z1
28	036-00008-Z1	A	THERM 30 OHM 1.5A 5% NPb RAD	0	NTC1	GE SENSING	CL-210	DO NOT POPULATE, SHORT WITH 28 AWG WIRE
29	036-00008-Z1	A	THERM 30 OHM 1.5A 5% NPb RAD	0	NTC2	GE SENSING	CL-210	DO NOT POPULATE, SHORT WITH AWG28 WIRE
30	071-00083-Z1	A	TRAN MOSFET nCH 12A 500V NPb TO220	1	Q1	ST MICROELECTRONICS	STP12NM50FP	
31	020-06374-Z1	A	RES 1M OHM 1/4W ±1% NPb 1206	6	R1 R2 R3 R13 R14 R15	DALE	CRCW12061M00FKEA	
32	000-00004-Z1	A	NO POP RES NPb 1206	0	R4 R5 R17 R21 R22	NO POP	NP-RES-1206	DO NOT POPULATE
33	020-06376-Z1	A	RES 48.7K OHM 1/4W ±1% NPb 1206	1	R6	DALE	CRCW120648K7FKEA	ECO819
34	020-06389-Z1	A	RES 4.7 OHM 1/4W ±1% NPb 1206	1	R7	DALE	CRCW12064R70FKEA	ECO805
35	020-06310-Z1	A	RES 20K OHM 1/4W ±1% NPb 1206 FILM	1	R8	DALE	CRCW120620K0FKEA	
36	030-00092-Z1	A	RES 0.1 OHM 3W ±1% WW ISEN NPb AXL	1	R9	OHMITE	13FR100E	
37	021-01186-Z1	A	RES 1 OHM 1W ±5% NPb 2512 FILM	0	R10	DALE	CRCW25121R00JNEG	DO NOT POPULATE
38	020-02616-Z1	A	RES 1k OHM 1/4W ±1% NPb 1206 FILM	2	R11 R20	DALE	CRCW12061K00FKEA	
39	020-02273-Z1	A	RES 0 OHM 1/4W NPb 1206 FILM	3	R12 R16 R23	DALE	CRCW12060000Z0EA	
40	020-06391-Z1	A	RES 1.78K OHM 1/4W ±1% NPb 1206	1	R18	DALE	CRCW12061K78FKEA	

3. BILL OF MATERIALS



CIRRUS LOGIC®

CDB150X-01

CIRRUS LOGIC
CDB150X-01_Rev_C


BILL OF MATERIAL (Page 2 of 2)

Item	Cirrus P/N	Rev	Description	Qty	Reference Designator	MFG	MFG P/N	Notes
41	020-02502-Z1	A	RES 100 OHM 1/4W ±1% NPb 1206 FILM	1	R19	DALE	CRCW1206100RFKEA	
42	110-00025-Z1	A	CON TEST PT .1" TIN PLATE WHT NPb	7	TP2 TP3 TP4 TP5 TP6 TP7 TP8	KEYSTONE	5002	
43	065-00328-Z3	A2	IC CRUS LPWR FACTOR CORR NPb SOIC8	1	U1	CIRRUS LOGIC	CS1501-FSZ/A2	ECO0841
44	065-00276-Z5	C1	IC CRUS LPWR FACTOR CORR NPb SOIC8	0	U2	CIRRUS LOGIC	CS1500-FSZ/C1	DO NOT POPULATE
45	036-00006-Z1	A	VARISTOR 300V 400pF 14mm NPb RAD	1	VZ	LITTELFUSE	V300LA20AP	
46	311-00025-Z1	A	HTSNK TO220 MOUNTING KIT NPb	1	XHS1	AAVID THERMALLOY	4880G	INCLUDES ALL MOUNTING HARDWARE
47	300-00025-Z1	A	SCREW 4-40X5/16" PH MACH SS NPb	4	XMH1 XMH2 XMH3 XMH4	BUILDING FASTENERS	PMSSS 440 0031 PH	
48	422-00013-01	C	LBL SUBASSY PRODUCT ID AND REV	1		CIRRUS LOGIC	422-00013-01	
49	422-00037-01	C	LBL SUBASSY PRODUCT NUMBER	1		CIRRUS LOGIC	422-00037-01	SEE ASSYDWG FOR LABEL PLACEMENT
50	603-00473-Z1	C	ASSY DWG CDB150X-0X-Z-NPb	REF		CIRRUS LOGIC	603-00473-Z1	ECO805/ECO824/ECO0841
51	240-00473-Z1	C	PCB CDB150X-0X-Z-NPb	1		CIRRUS LOGIC	240-00473-Z1	ECO805/ECO824/ECO0841
52	600-00473-Z2	C	SCHEM CDB150X-01-Z-NPb	REF		CIRRUS LOGIC	600-00473-Z2	ECO819/EC 00841
	080-00036-Z1	A	WIRE 22AWG 19/34 STR BLK 105C NP	1		ALPHA WIRE COMPANY	5855 BK005	ECO824, SEE ASSY DWG
	080-00002-01	A	WIRE 28/1 AWG, KYNAR MOD, 500FT	1		SQUIRES	L 500 UL1422 28/1 BLU	ECO824, SEE ASSY DWG



CIRRUS LOGIC®

CDB150X-01

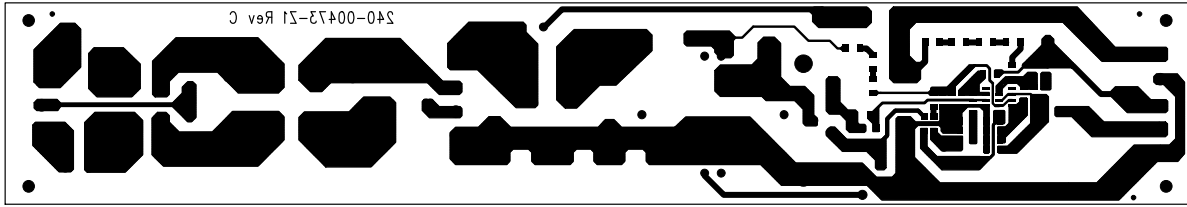

PCB 240-00473-Z1 REV C

BOTTOM SIDE

Figure 3. Bottom Routing



PCB 240-00473-Z1 REV C

SILKSCREEN BOTTOM

Figure 4. Bottom Silkscreen



PCB 240-00473-Z1 REV C


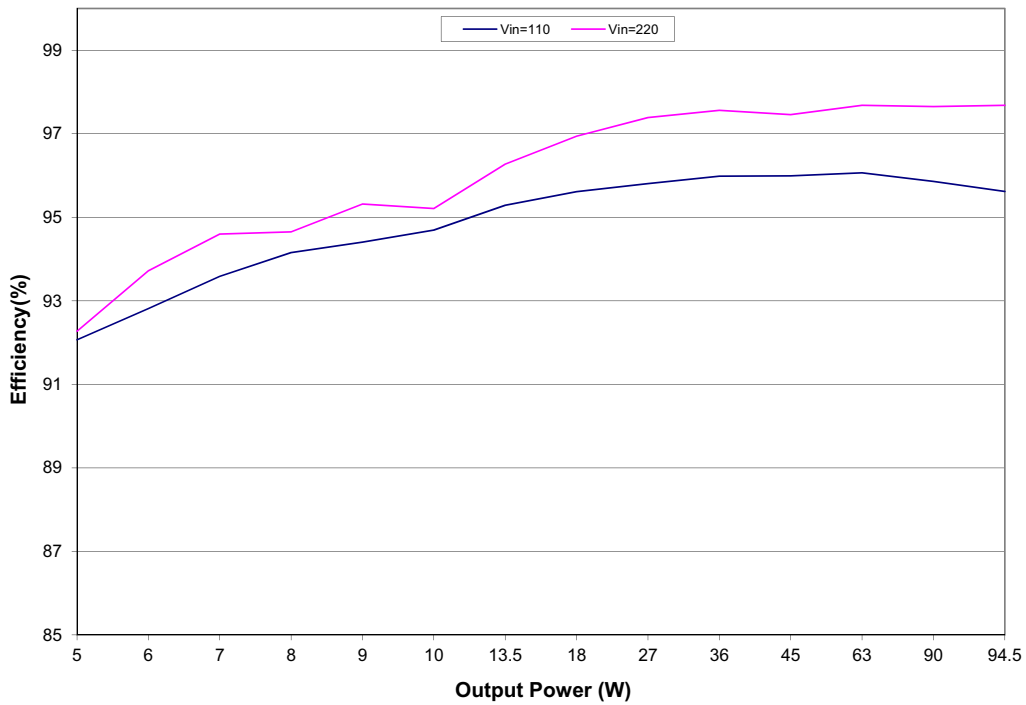
PASTE MASK BOTTOM

Figure 5. Bottom Solder Paste Mask

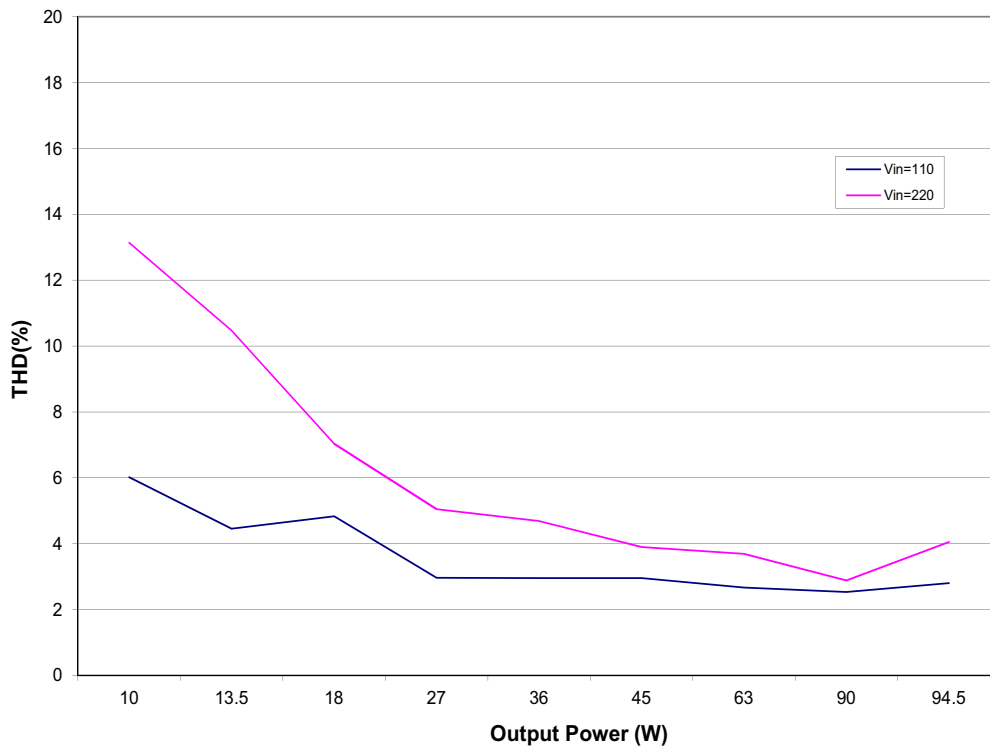

CIRRUS LOGIC®

CDB150X-01

5. PERFORMANCE PLOTS

Figure 6. Efficiency vs. Load at 110 VAC, 220 VAC

Figure 7. Distortion vs. Load at 110 VAC, 220 VAC

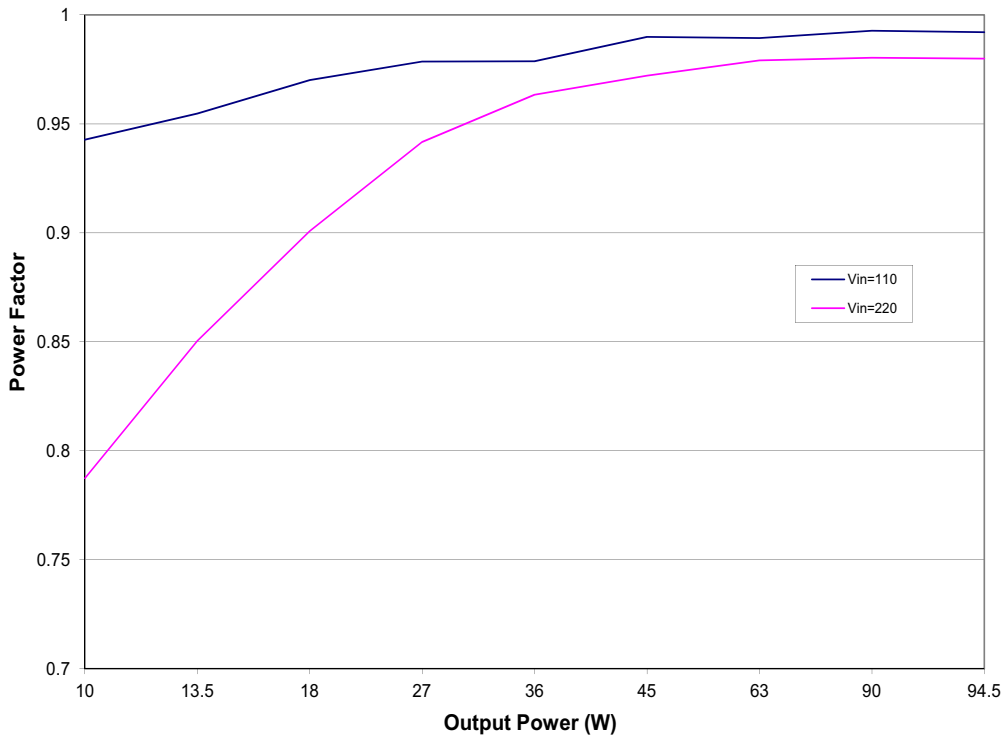


Figure 8. Power Factor vs. Load at 110 VAC, 220 VAC

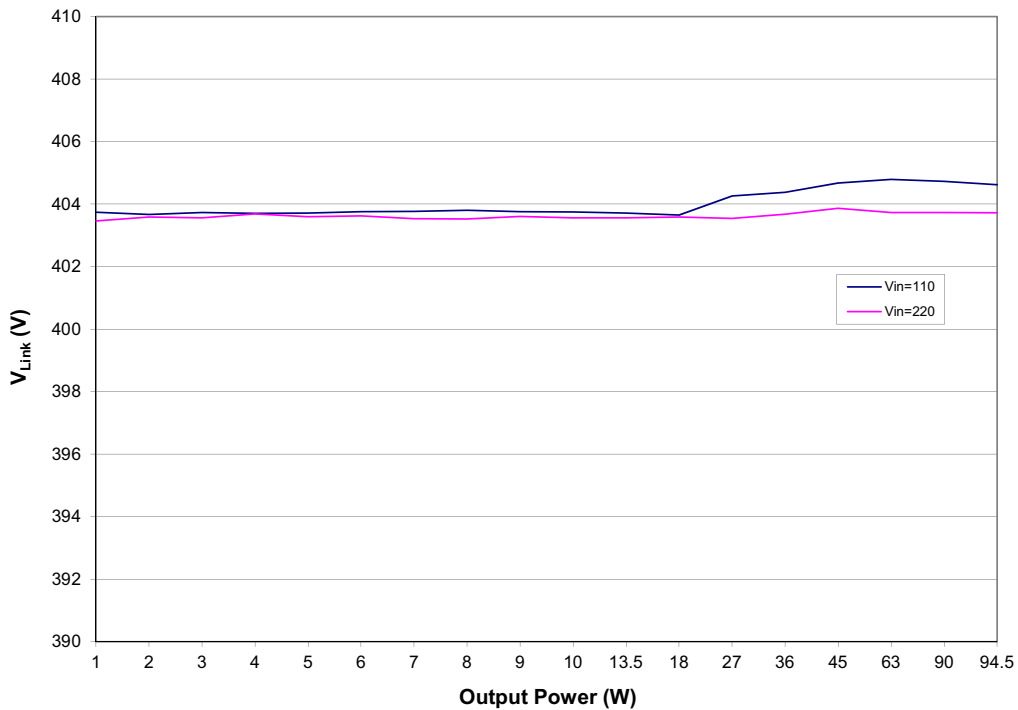


Figure 9. V_{Link} vs. Output Power at 110 VAC, 220 VAC

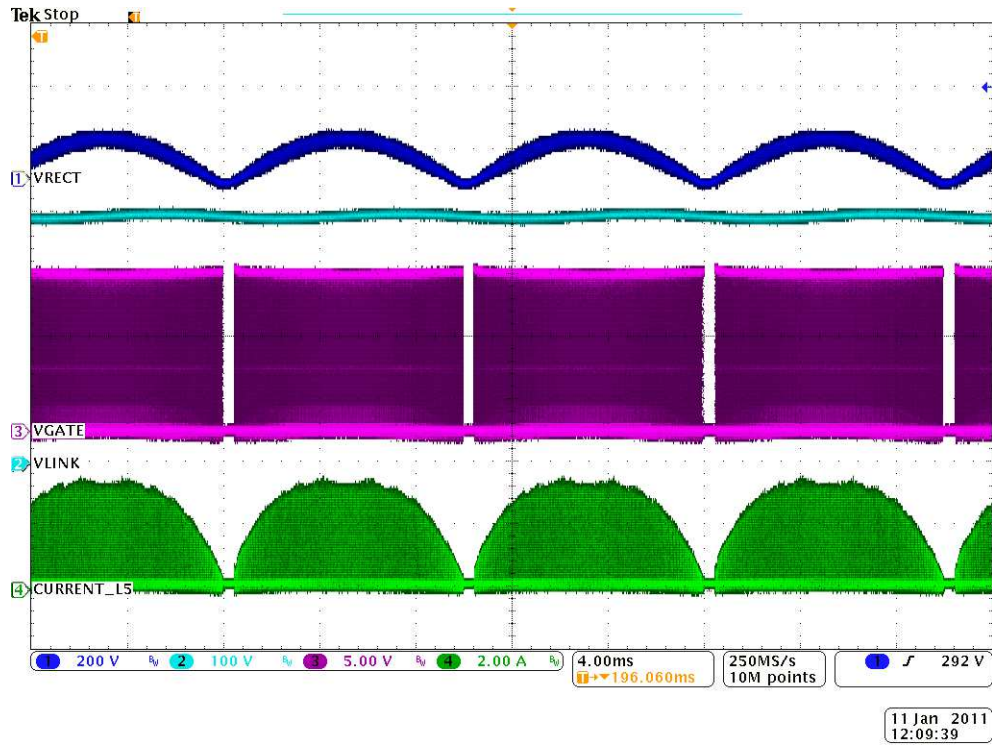


Figure 10. Steady State Waveforms — 110 VAC

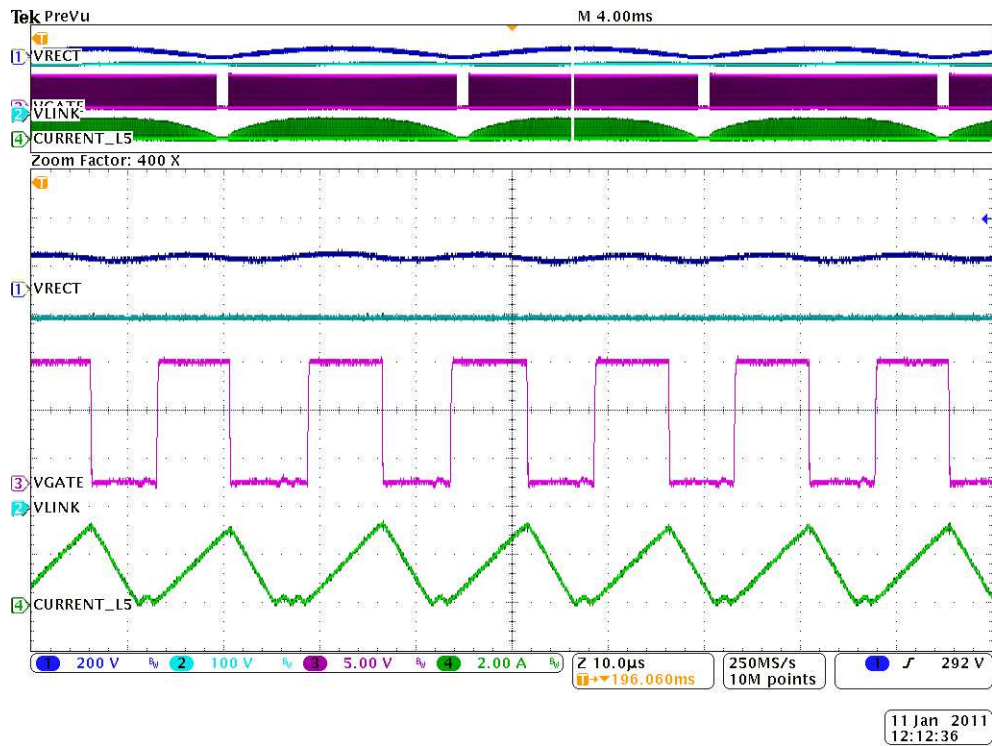


Figure 11. Switching Frequency Profile at Peak of AC Line Voltage — 110 VAC

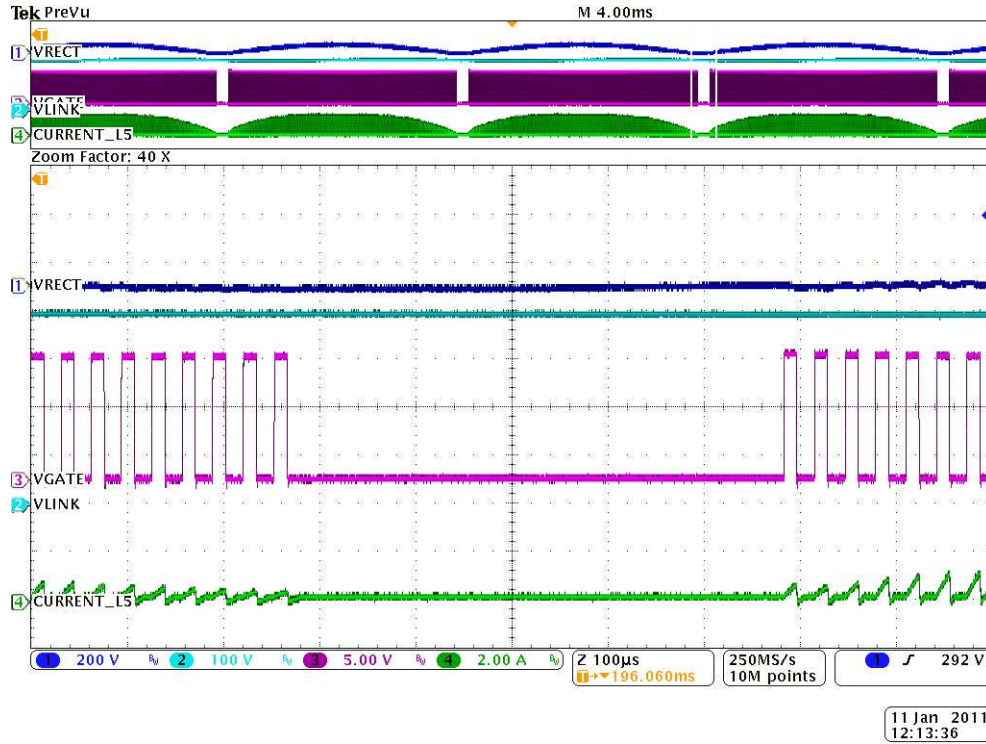


Figure 12. Switching Frequency Profile at Trough of AC Line Voltage — 110 VAC

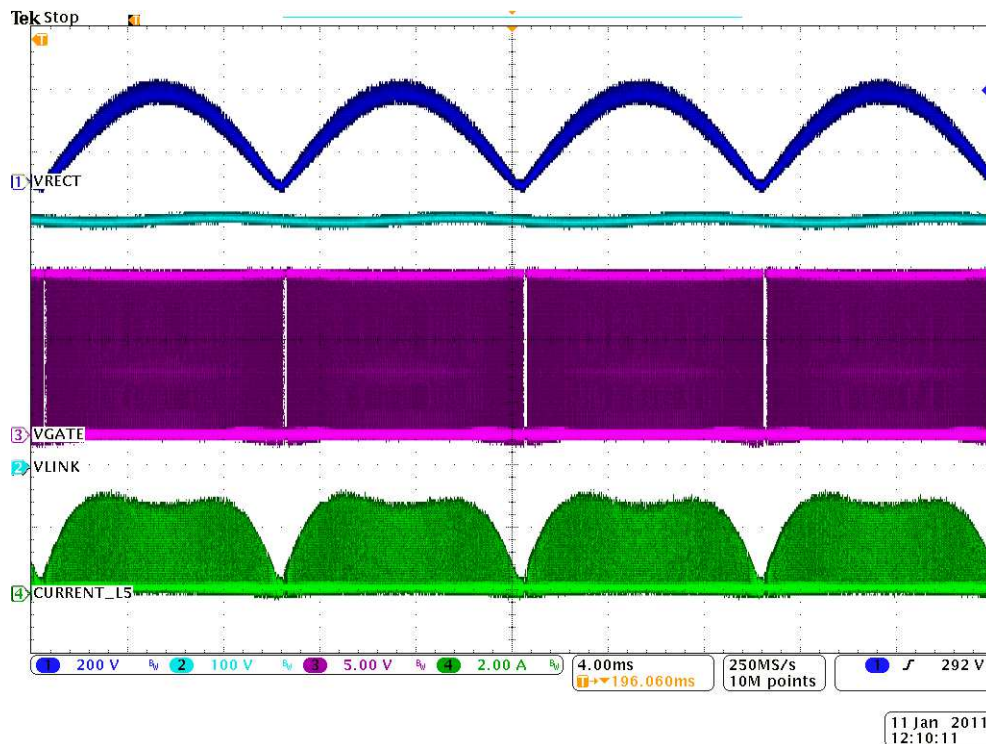


Figure 13. Steady State Waveforms — 220 VAC

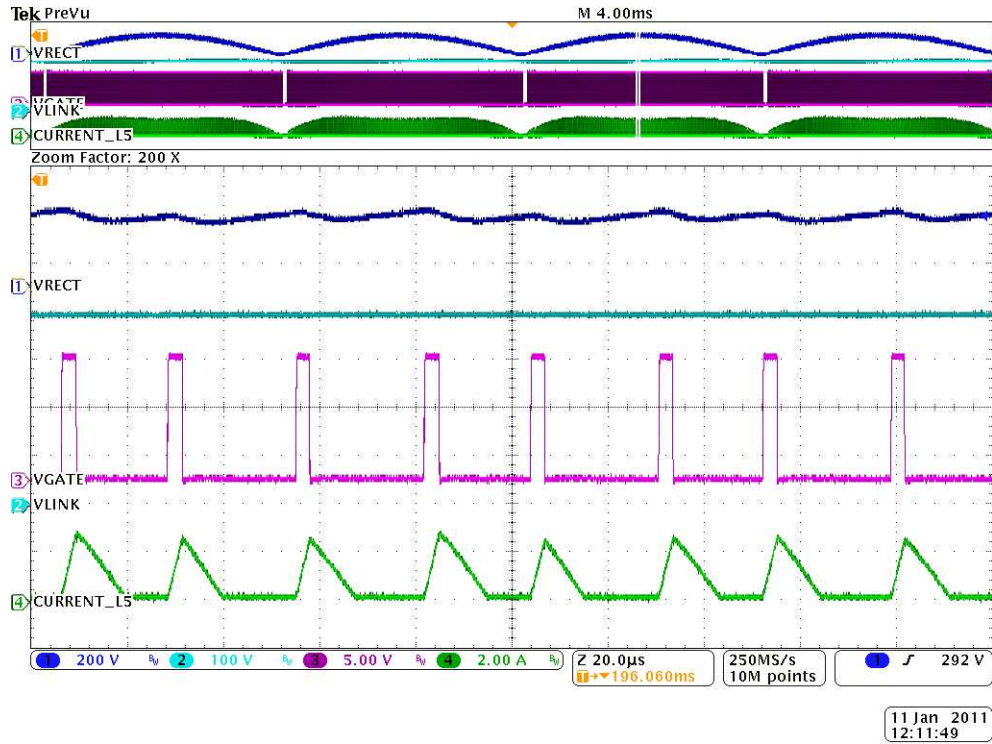


Figure 14. Switching Frequency Profile at Peak of AC Line Voltage — 220 VAC

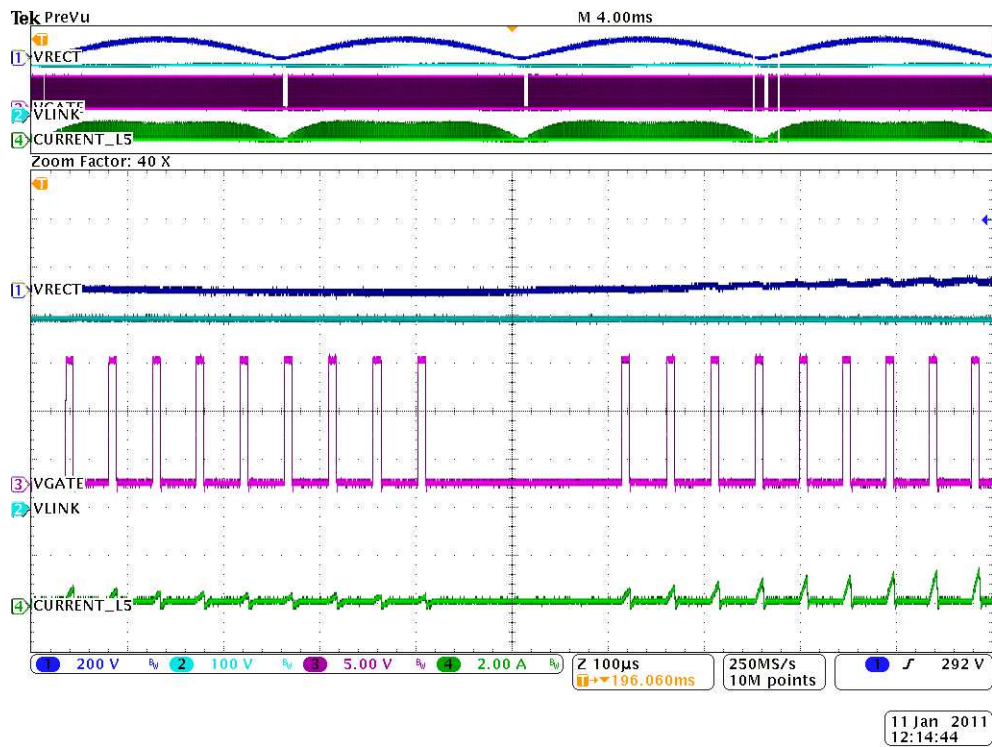


Figure 15. Switching Frequency Profile at Trough of AC Line Voltage — 220 VAC

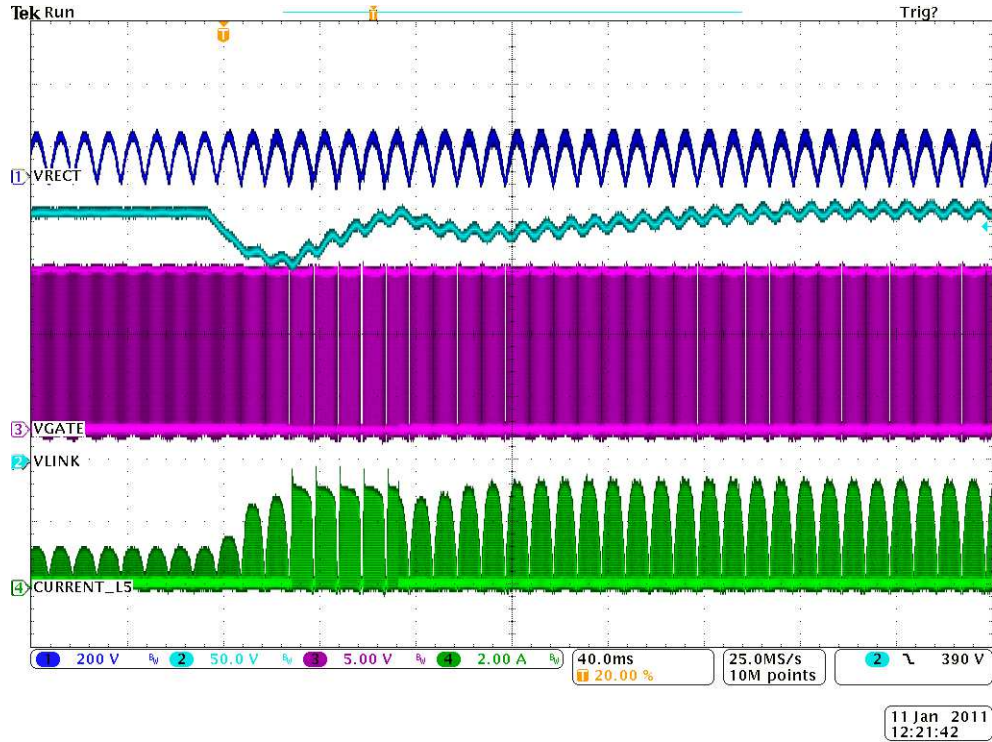


Figure 16. Load Transient — 9 W to 90 W, 1 W/uS, 110 VAC

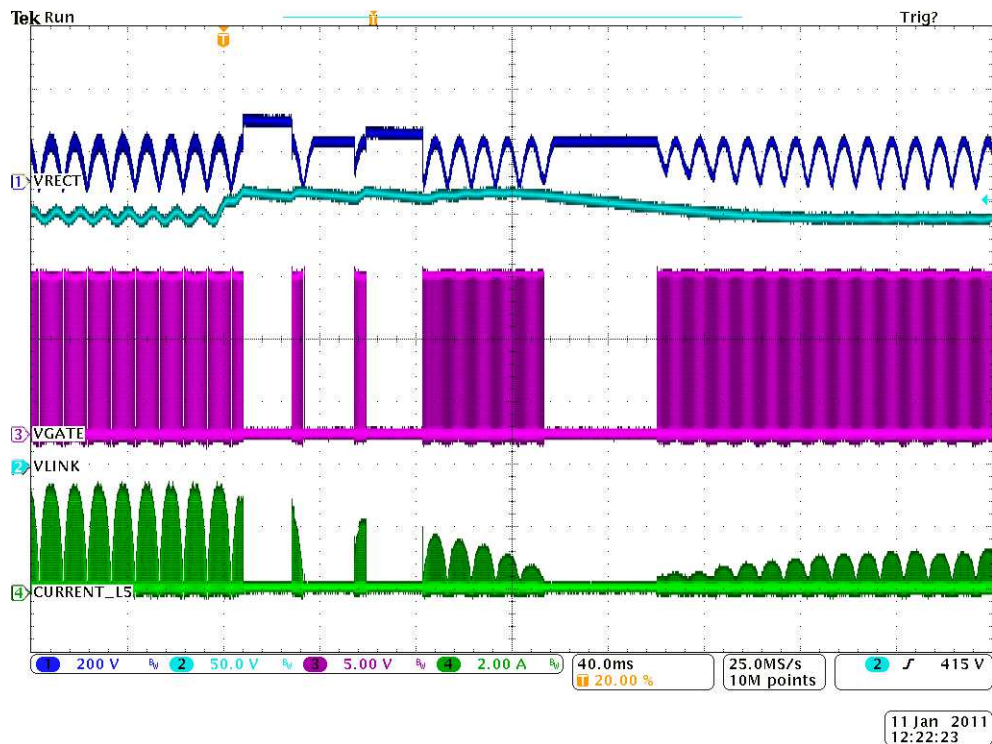


Figure 17. Load Transient — 90 W to 9 W, 1 W/uS, 110 VAC

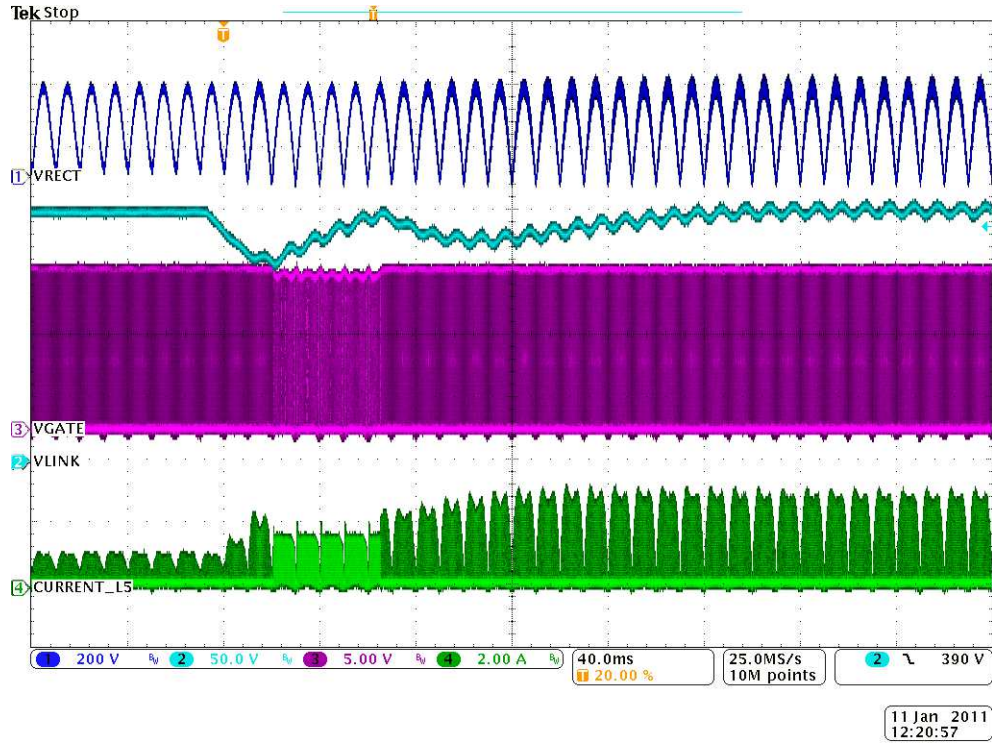


Figure 18. Load Transient — 9 W to 90 W, 1 W/uS, 220 VAC

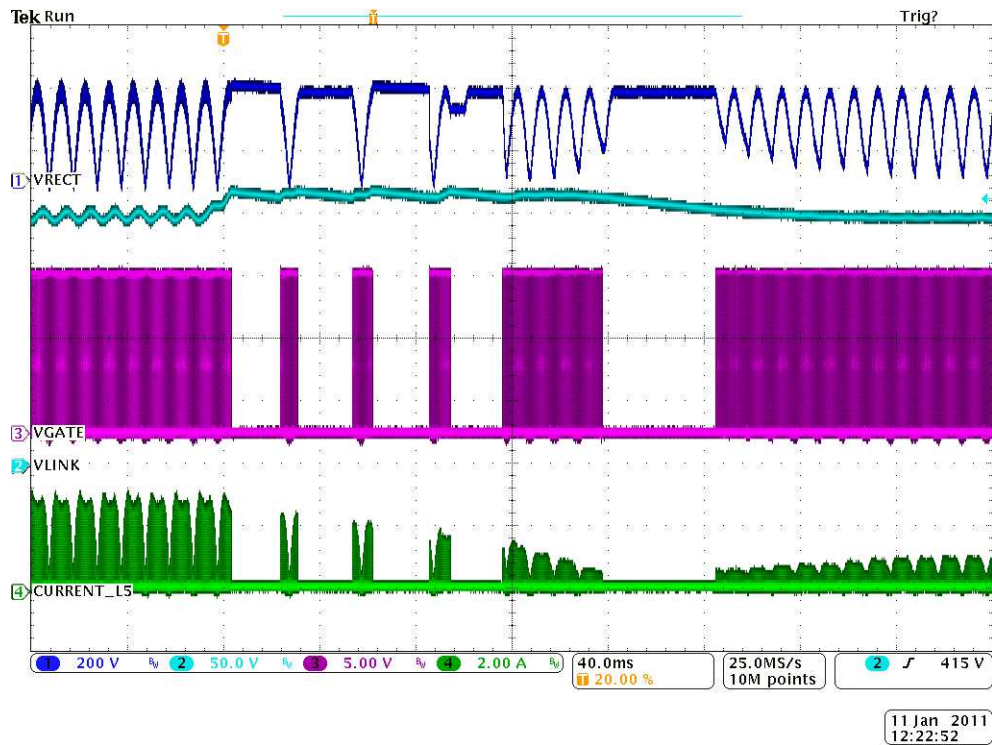


Figure 19. Load Transient — 90 W to 9 W, 1 W/uS, 220 VAC

6. REVISION HISTORY

Revision	Date	Changes
DB1	FEB 2011	Initial Release.
DB2	FEB 2011	Updated Efficiency vs. Load plot with more current data.
DB3	MAR 2011	Updated BOM & Layers to rev C.