



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Schottky Bridge Rectifiers

**COMCHIP**  
SMD DIODE SPECIALIST


## CDBHD280-G Thru 2100-G

Reverse Voltage: 80 - 100 Volts

Forward Current: 2.0 Amp

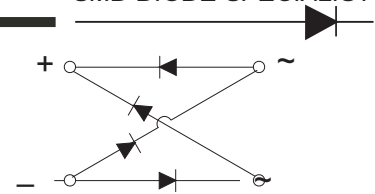

### Mini-DIP

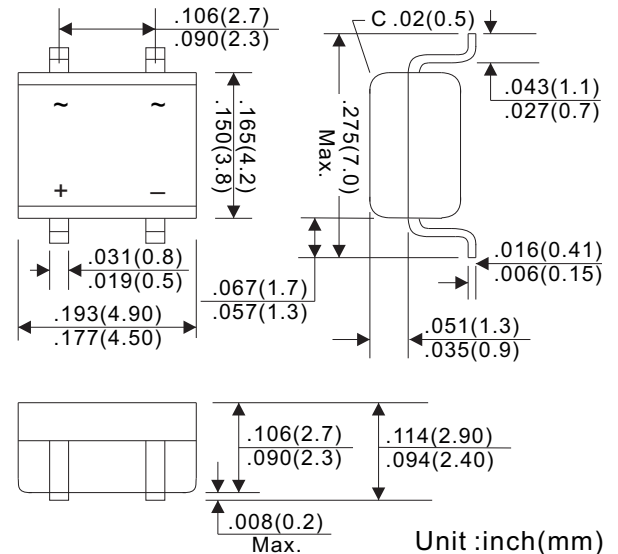

### Features

- Schottky barrier chips in bridge
- Metal-Semiconductor junction with guard ring
- Highsurge current capability
- Silicon epitaxial planar chips
- For use in low voltage, high efficiency inverters, free wheeling, and polarity protection applications
- Lead-free part, meet RoHS requirements

### Mechanical Data

- Case: Mini-Dip bridge (TO-269AA) plastic molded case
- Epoxy: UL94-V0 rated flame retardant
- Terminals: Solderable per MIL-STD-750 Method 2026
- Polarity: As marked on body
- Mounting Position: Any
- Weight: 0.0078 ounces, 0.22 grams

## MAXIMUM RATING AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

<i>CDBHD</i> - Symbols	280	290	2100	Units	
Maximum Recurrent Peak Reverse Voltage	VRRM	80	90	100	Volts
Maximum RMS Voltage	VRMS	56	63	70	Volts
Maximum DC Blocking Voltage	VDC	80	90	100	Volts
Maximum Average Forward Rectified Current 0.2x0.2" (5.0x5.0mm) copper pad area, see Figure 1	I <sub>AV</sub>	2.0		Amps	
Peak Forward Surge Current 8.3mS single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	50.0		Amps	
Maximum Forward Voltage at 1.0A (Note 1)	V <sub>F</sub>	0.85		Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>	0.5 20.0		mA	
Typical Junction Capacitance (Note 2)	C <sub>J</sub>	125		pF	
Typical Thermal Resistance (Note 3)	R <sub>θJA</sub> R <sub>θJL</sub>	85.0 20.0		°C/W	
Operating Junction Temperature Range	T <sub>J</sub>	-55 ~ +125		°C	
Storage Temperature Range	T <sub>STG</sub>	-55 ~ +150		°C	

Note 1. Pulse test: 300μS pulse width, 1% duty cycle

2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts

3. Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2x0.2"(5.0x5.0mm) copper pad areas.

# Schottky Bridge Rectifiers

Fig. 1 - Forward Current Derating Curve

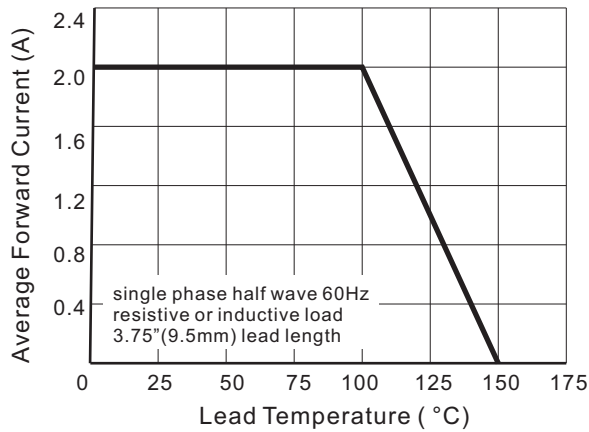


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

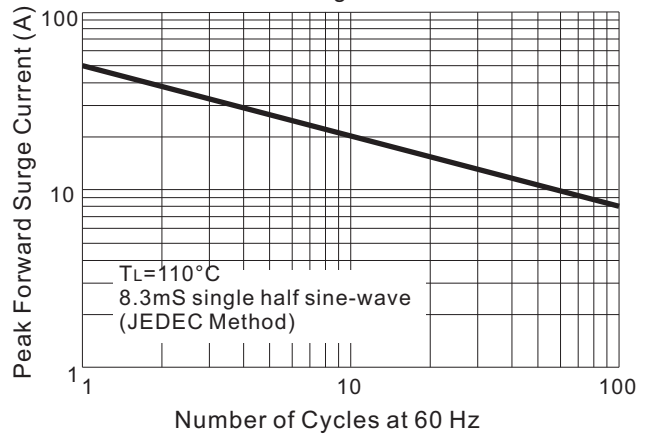


Fig. 3 - Typical Instantaneous Forward Characteristics

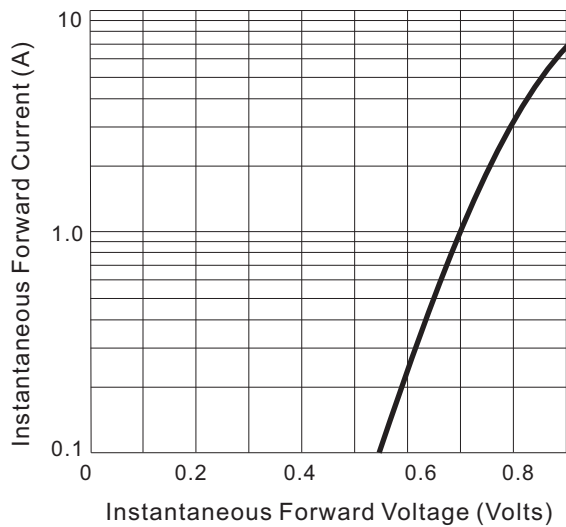


Fig. 4 - Typical Reverse Characteristic

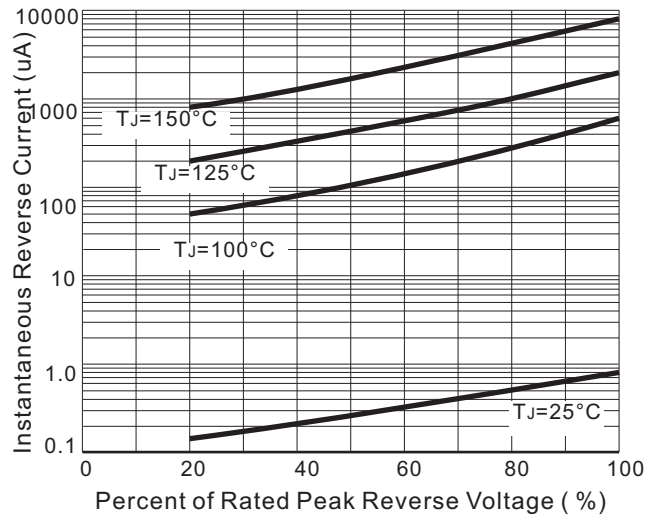


Fig. 5 - Typical Junction Capacitance

