



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SMD Power Inductor CDEP85

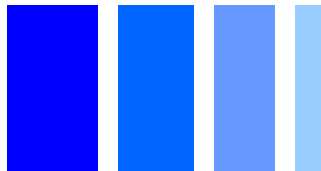

## Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 8.4 × 8.4 × 5.5 mm Max.
- Product weight: 1.2 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +125°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 1000pcs per reel


## Applications

- Ideally used in portable computer CPU power supply.

## Dimension - [mm]

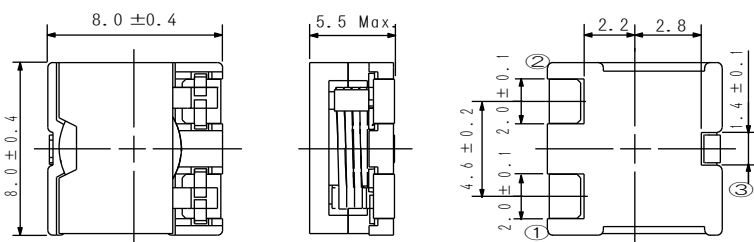

## Land pattern and Schematics - [mm]

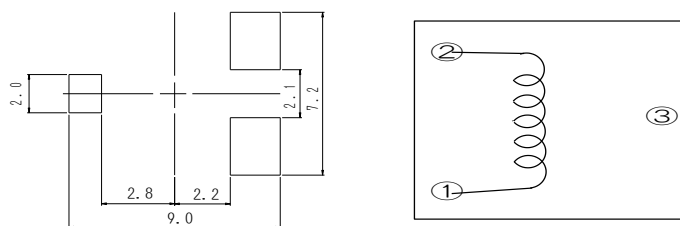

## Electrical Characteristics

### Electrical characteristics - Low D.C.R. Type

Part No.	Stamp	Inductance [Within]※1	D.C.R. (mΩ)[Max.] (at20°C)	Saturation current (A)※2		Temperature Rise Current (A)※3
				(at 20°C)	(at105°C)	
CDEP85NP-R5ØMC-125	R50ML	0.5µH±20%	2.5(2.1)	12.0(15.0)	10.4(13.0)	18.0
CDEP85NP-1R1MC-125	1R1ML	1.1µH±20%	3.4(2.8)	7.8(9.8)	6.8(8.5)	17.0
CDEP85NP-2RØMC-125	2R0ML	2.0µH±20%	4.8(4.0)	5.3(6.6)	4.7(5.9)	13.5
CDEP85NP-3R1MC-125	3R1ML	3.1µH±20%	7.0(5.9)	4.4(5.5)	3.7(4.6)	10.8
CDEP85NP-4R5MC-125	4R5ML	4.5µH±20%	8.1(6.8)	3.6(4.5)	3.2(4.0)	9.7
CDEP85NP-6R1MC-125	6R1ML	6.1µH±20%	9.8(8.2)	3.4(4.2)	2.9(3.6)	8.3
CDEP85NP-8RØMC-125	8R0ML	8.0µH±20%	11.7(9.8)	2.9(3.6)	2.6(3.2)	7.5
CDEP85NP-1ØØMC-125	100ML	10.0µH±20%	15.1(12.6)	2.6(3.2)	2.2(2.8)	6.5



## Electrical characteristics - Standard Type

Part No.	Stamp	Inductance [Within] ※1	D.C.R.(mΩ) [Max.] (at 20°C)	Saturation current · (A)※2		Temperature Rise current (A)※3
				(at 20°C)	(at105°C)	
CDEP85NP-R35MC-88	R35MS	0.35μH±20%	2.5(2.1)	18.4(23.0)	15.2(19.0)	18.0
CDEP85NP-R80MC-88	R80MS	0.8μH±20%	3.4(2.8)	11.4(14.2)	10.0(12.5)	17.0
CDEP85NP-1R4MC-88	1R4MS	1.4μH±20%	4.8(4.0)	8.8(11.0)	7.6(9.5)	13.5
CDEP85NP-2R2MC-88	2R2MS	2.2μH±20%	7.0(5.9)	7.0(8.7)	5.8(7.3)	10.8
CDEP85NP-3R2MC-88	3R2MS	3.2μH±20%	8.1(6.8)	5.8(7.2)	5.0(6.2)	9.7
CDEP85NP-4R3MC-88	4R3MS	4.3μH±20%	9.8(8.2)	5.0(6.2)	4.1(5.1)	8.3
CDEP85NP-5R6MC-88	5R6MS	5.6μH±20%	11.7(9.8)	4.3(5.4)	3.6(4.5)	7.5
CDEP85NP-7R1MC-88	7R1MS	7.1μH±20%	15.1(12.6)	3.8(4.8)	3.3(4.1)	6.5

## Electrical characteristics - High Power Type


Part No.	Stamp	Inductance [Within] ※1	D.C.R.(mΩ) [Max.] (at 20°C)	Saturation current (A) ※2		Temperature Rise current (A) ※3
				(at 20°C)	(at105°C)	
CDEP85NP-R20MC-50	R20MH	0.2μH±20%	2.5(2.1)	32.0(40.0)	26.0(32.5)	18.0
CDEP85NP-R45MC-50	R45MH	0.45μH±20%	3.4(2.8)	22.0(27.5)	18.0(22.5)	17.0
CDEP85NP-R80MC-50	R80MH	0.8μH±20%	4.8(4.0)	16.0(20.0)	13.2(16.5)	13.5
CDEP85NP-1R2MC-50	1R2MH	1.2μH±20%	7.0(5.9)	12.8(16.0)	10.6(13.2)	10.8
CDEP85NP-1R8MC-50	1R8MH	1.8μH±20%	8.1(6.8)	10.8(13.5)	8.8(11.0)	9.7
CDEP85NP-2R4MC-50	2R4MH	2.4μH±20%	9.8(8.2)	9.3(11.6)	7.7(9.6)	8.3
CDEP85NP-3R2MC-50	3R2MH	3.2μH±20%	11.7(9.8)	8.0(10.0)	6.5(8.1)	7.5
CDEP85NP-4R0MC-50	4R0MH	4.0μH±20%	15.1(12.6)	7.2(9.0)	5.9(7.4)	6.5

※1. Measuring condition: at 100 kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 75% of it's nominal value.













※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDEP85

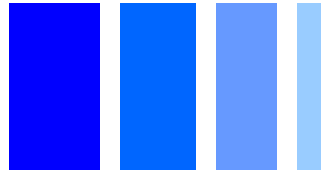

## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$

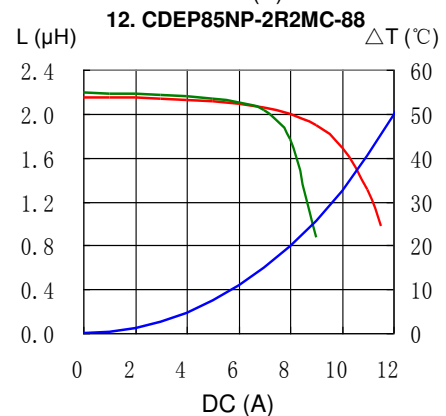
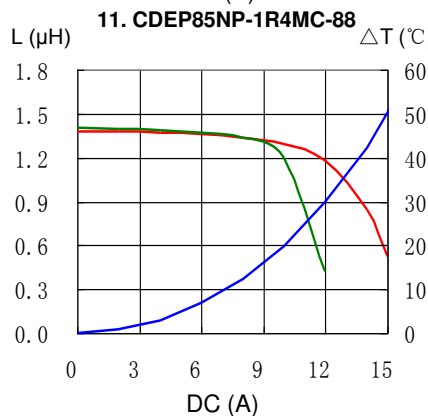
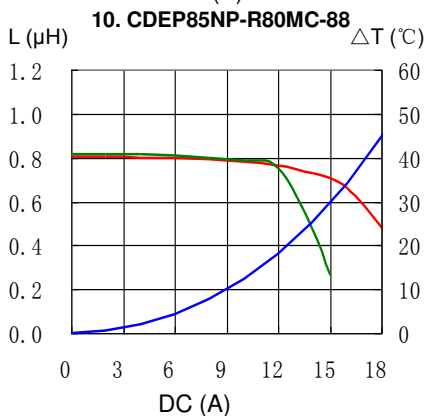
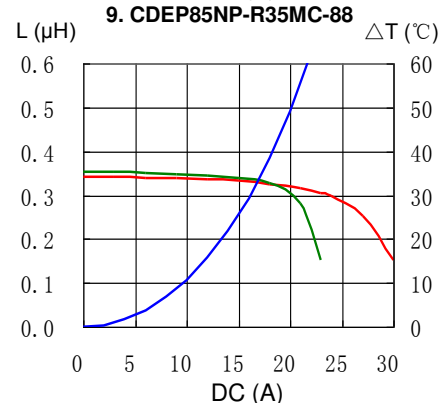
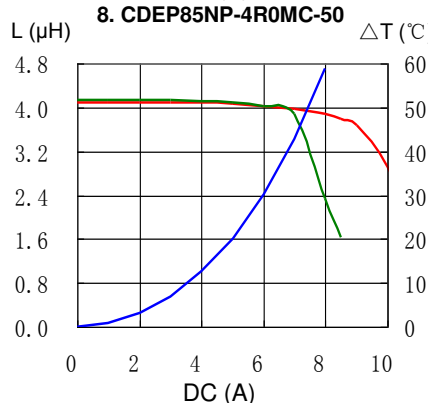
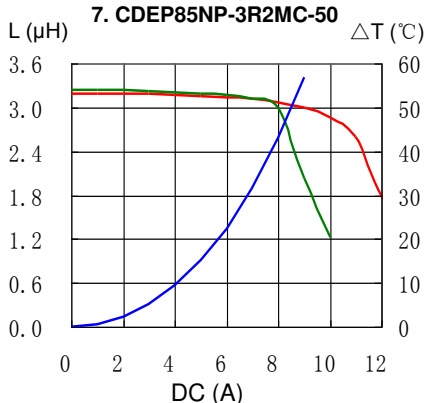
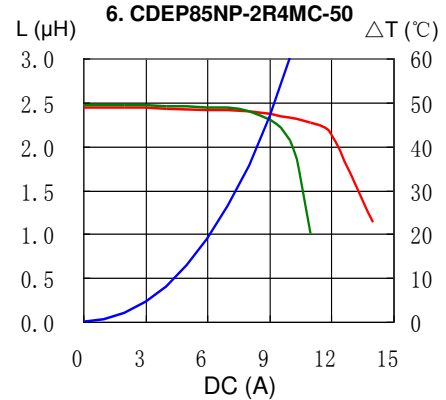
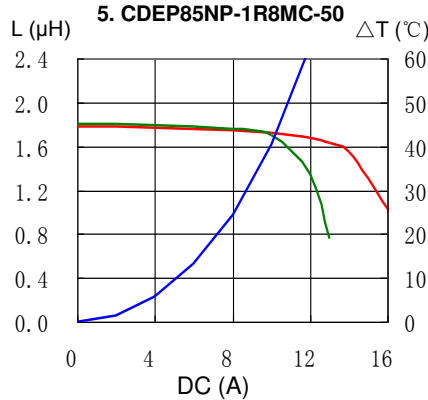
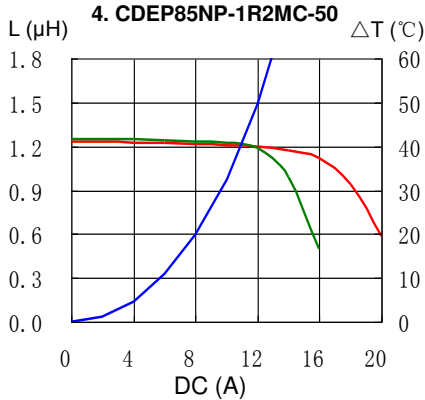
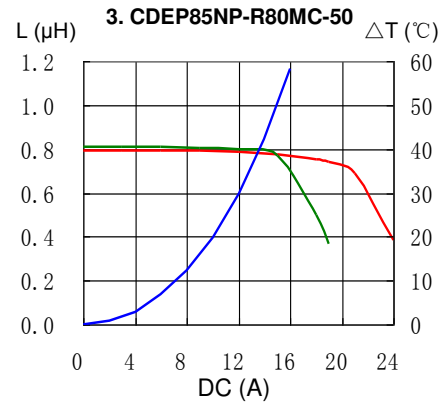
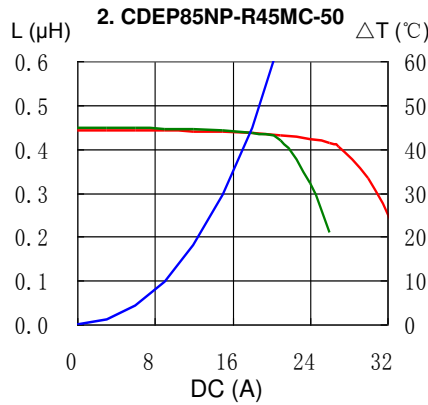
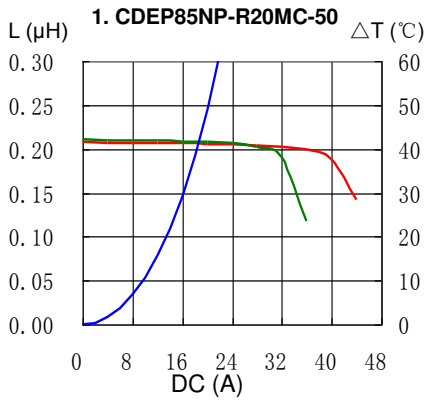


# SMD Power Inductor CDEP85



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$

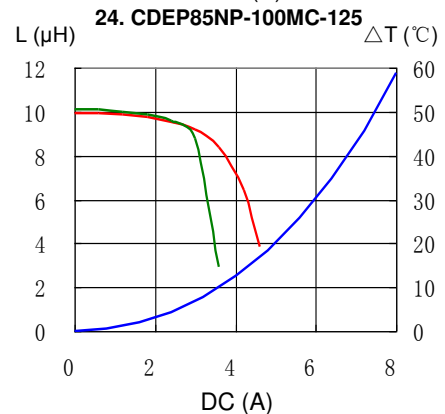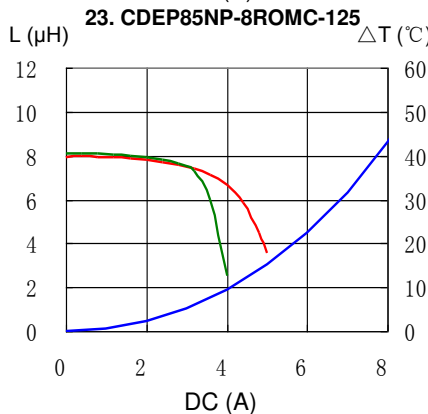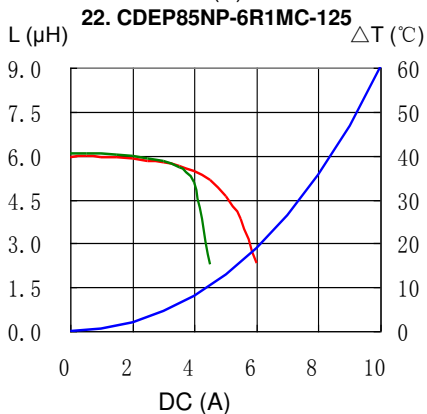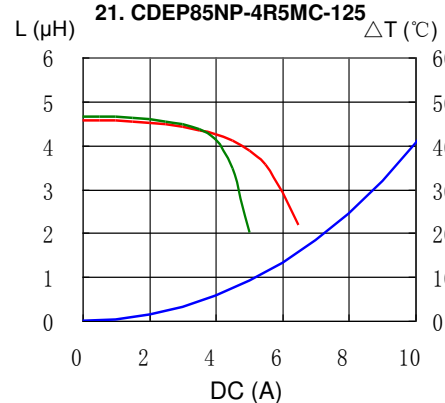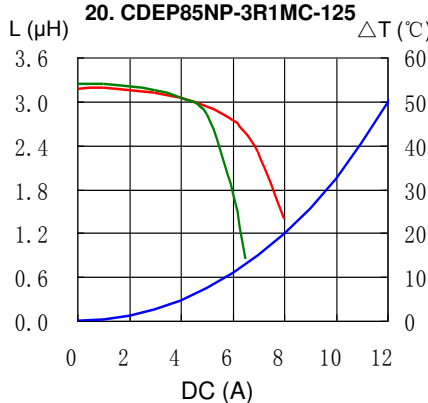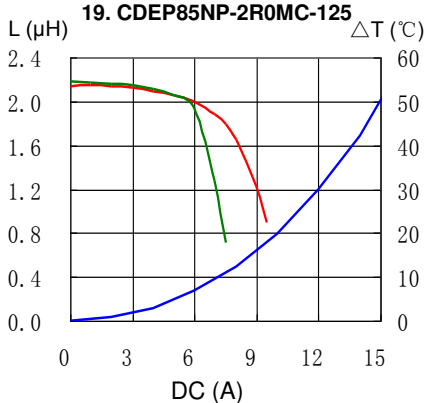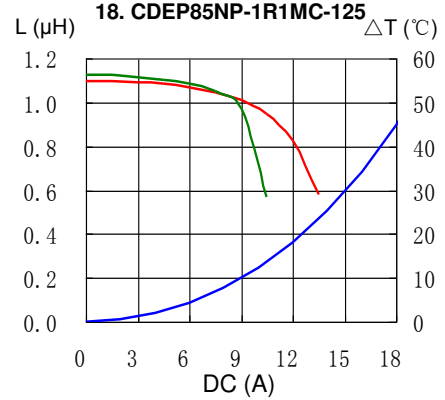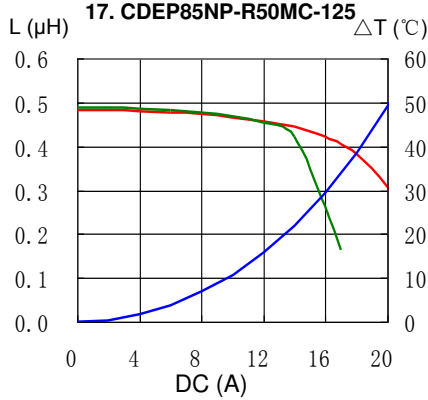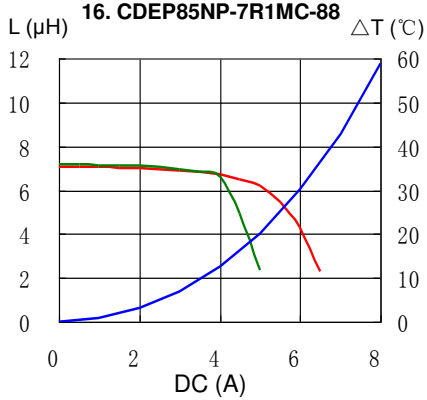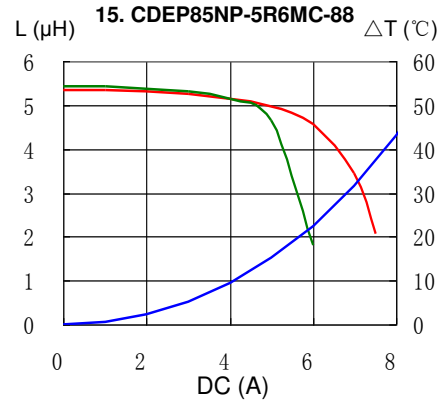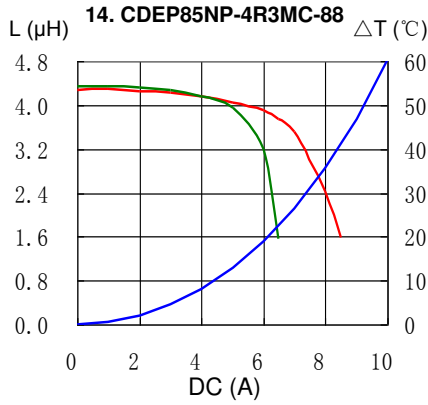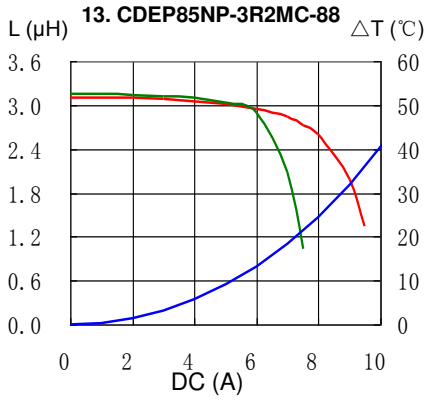


# SMD Power Inductor CDEP85




## Solder Reflow Condition

Heat Endurance

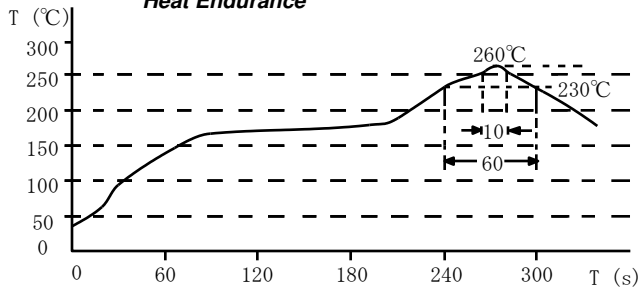

Temperature Chart

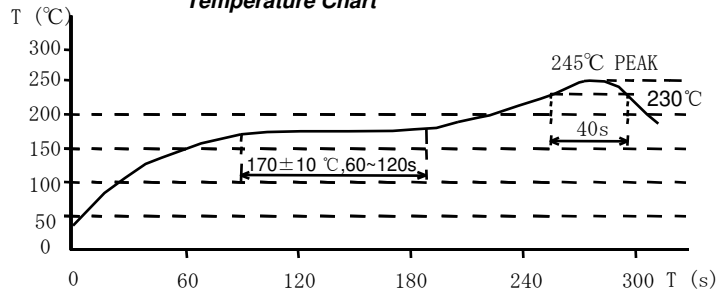

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)