



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- TEMPERATURE COMPENSATED ZENER REFERENCE DIODES
- LEADLESS PACKAGE FOR SURFACE MOUNT
- 19.2 VOLT NOMINAL ZENER VOLTAGE $\pm 5\%$
- LOW NOISE
- DOUBLE PLUG CONSTRUCTION
- METALLURGICALLY BONDED

CDLL4916
thru
CDLL4932A

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C
DC Power Dissipation: 500mW @ +50°C
Power Derating: 4 mW / °C above +50°C

REVERSE LEAKAGE CURRENT

$I_R = 15\mu A$ @ 25°C & $V_R = 12V_{dc}$


ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

CDI TYPE NUMBER (Note 3)	TEST CURRENT I_{ZT}	VOLTAGE TEMPERATURE STABILITY ${}^3V_{ZT}$ (Note 2)	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT	MAXIMUM DYNAMIC IMPEDANCE Z_{ZT} (Note 1)	MAXIMUM NOISE DENSITY N_D
	mA	mV	°C	%/°C	OHMS	$\mu V/Hz$
CDLL4916	0.5	144	+25 to +100	0.01	600	1.0
CDLL4916A	0.5	298	-55 to +100	0.01	600	1.0
CDLL4917	0.5	72	+25 to +100	0.005	600	1.0
CDLL4917A	0.5	149	-55 to +100	0.005	600	1.0
CDLL4918	0.5	29	+25 to +100	0.002	600	1.0
CDLL4918A	0.5	60	-55 to +100	0.002	600	1.0
CDLL4919	1.0	144	+25 to +100	0.01	300	0.5
CDLL4919A	1.0	298	-55 to +100	0.01	300	0.5
CDLL4920	1.0	72	+25 to +100	0.005	300	0.5
CDLL4920A	1.0	149	-55 to +100	0.005	300	0.5
CDLL4921	1.0	29	+25 to +100	0.002	300	0.5
CDLL4921A	1.0	60	-55 to +100	0.002	300	0.5
CDLL4922	2.0	144	+25 to +100	0.01	150	0.25
CDLL4922A	2.0	298	-55 to +100	0.01	150	0.25
CDLL4923	2.0	72	+25 to +100	0.005	150	0.25
CDLL4923A	2.0	149	-55 to +100	0.005	150	0.25
CDLL4924	2.0	29	+25 to +100	0.002	150	0.25
CDLL4924A	2.0	60	-55 to +100	0.002	150	0.25
CDLL4925	4.0	144	+25 to +100	0.01	75	0.22
CDLL4925A	4.0	298	-55 to +100	0.01	75	0.22
CDLL4926	4.0	72	+25 to +100	0.005	75	0.22
CDLL4926A	4.0	149	-55 to +100	0.005	75	0.22
CDLL4927	4.0	29	+25 to +100	0.002	75	0.22
CDLL4927A	4.0	60	-55 to +100	0.002	75	0.22
CDLL4928	4.0	14	+25 to +100	0.001	75	0.22
CDLL4928A	4.0	30	-55 to +100	0.001	75	0.22
CDLL4929	7.5	144	+25 to +100	0.01	36	0.20
CDLL4929A	7.5	298	-55 to +100	0.01	36	0.20
CDLL4930	7.5	72	+25 to +100	0.005	36	0.20
CDLL4930A	7.5	149	-55 to +100	0.005	36	0.20
CDLL4931	7.5	29	+25 to +100	0.002	36	0.20
CDLL4931A	7.5	60	-55 to +100	0.002	36	0.20
CDLL4932	7.5	14	+25 to +100	0.001	36	0.20
CDLL4932A	7.5	30	-55 to +100	0.001	36	0.20

NOTE 1 Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .

NOTE 2 The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No.5.

NOTE 3 Zener voltage range equals 19.2 volts $\pm 5\%$.

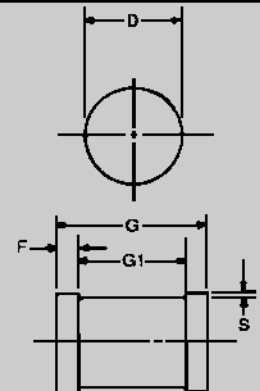

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
D	1.60	1.70	0.063	0.067
F	0.41	0.55	0.016	0.022
G	3.30	3.70	.130	.146
G1	2.54 REF.		.100 REF.	
S	0.03 MIN.		.001 MIN.	

FIGURE 1

DESIGN DATA

CASE: DO-213AA, Hermetically sealed glass case. (MELF, SOD-80, LL34)

LEAD FINISH: Tin / Lead

POLARITY: Diode to be operated with the banded (cathode) end positive.

MOUNTING POSITION: Any.

MOUNTING SURFACE SELECTION:
The Axial Coefficient of Expansion (COE) Of this Device is Approximately +6PPM/°C. The COE of the Mounting Surface System Should Be Selected To Provide A Suitable Match With This Device.



6 LAKE STREET, LAWRENCE, MASSACHUSETTS 01841
PHONE (978) 620-2600
WEBSITE: <http://www.microsemi.com>

FAX (978) 689-0803

CDLL4916 thru CDLL4932A

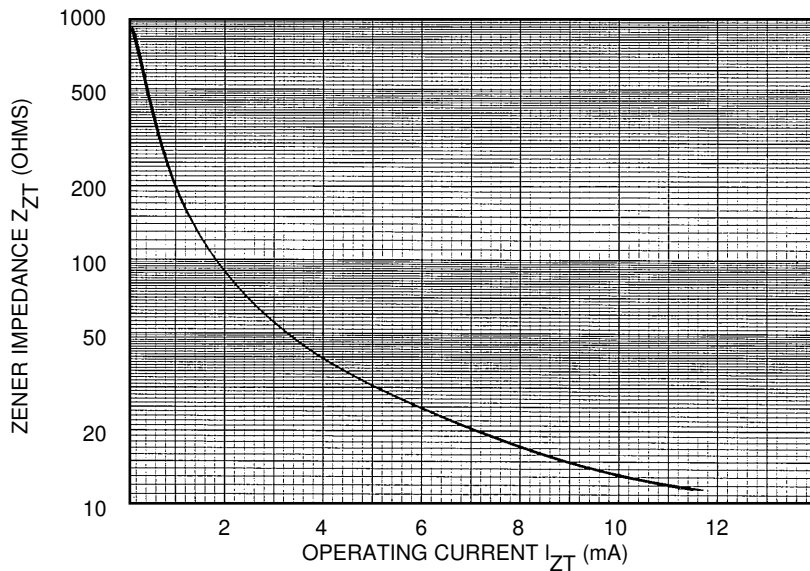


FIGURE 2
ZENER IMPEDANCE VS. OPERATING CURRENT

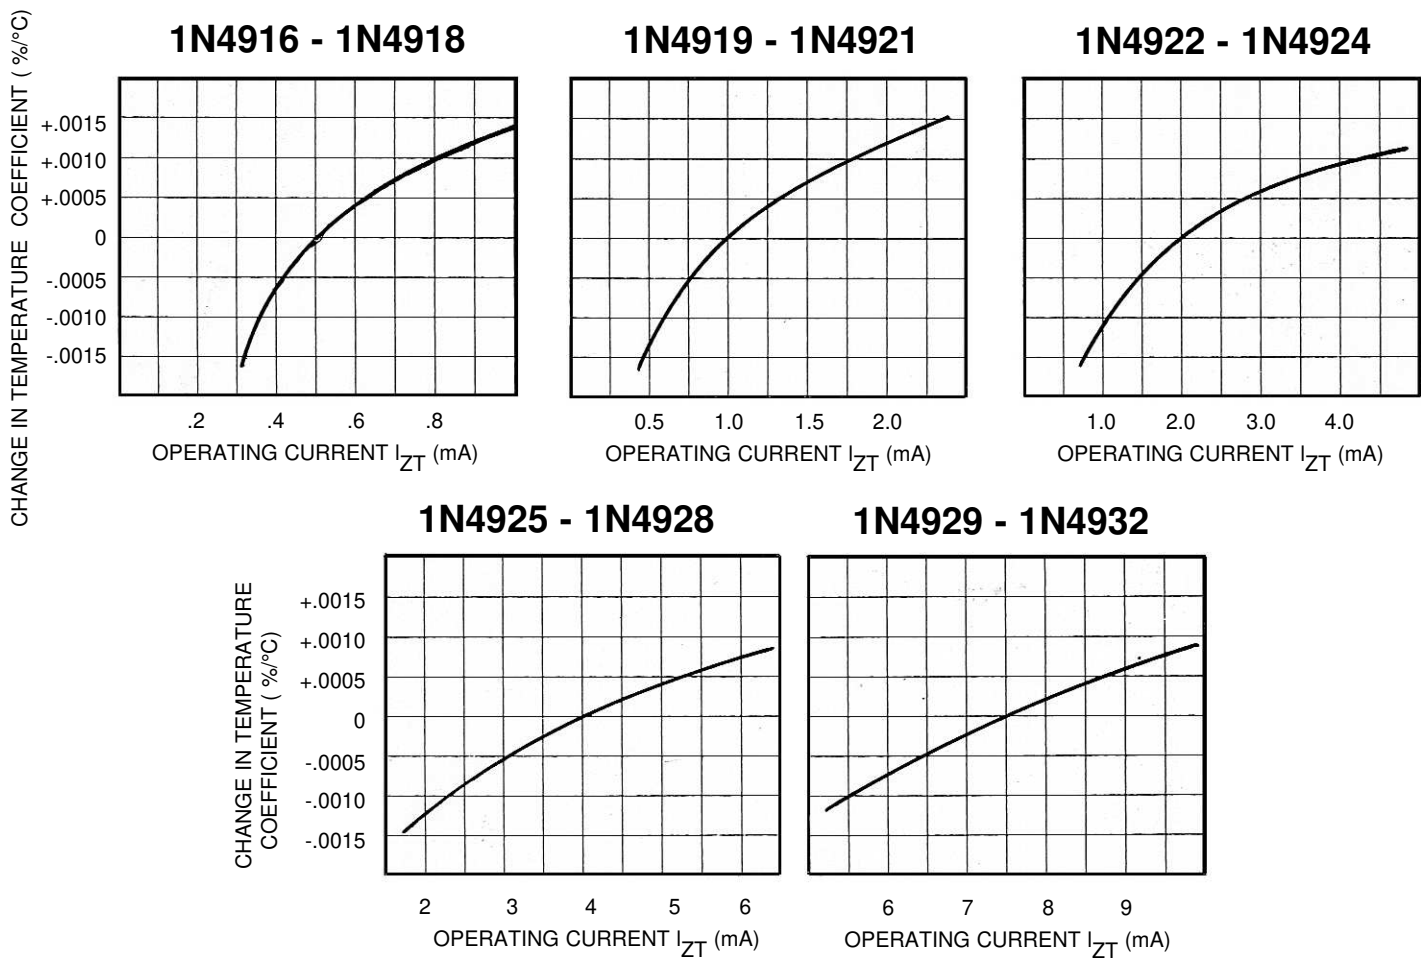


FIGURE 3
TYPICAL CHANGE OF TEMPERATURE COEFFICIENT
WITH CHANGE IN OPERATING CURRENT