



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CDM22011-600LRFP

N-CHANNEL
LR POWER MOSFET
11 AMP, 600 VOLT

ULTRAMOS™



TO-220FP CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CDM22011-600LRFP is a 600 volt N-Channel MOSFET designed for high voltage, fast switching applications such as Power Factor Correction (PFC), lighting and power inverters. This UltraMOS™ MOSFET combines high voltage capability with ultra low $r_{DS(ON)}$, low threshold voltage, and low gate charge for optimal efficiency.

MARKING CODE: CDM11-600LR

APPLICATIONS:

- Power Factor Correction
- Alternative energy inverters
- Solid State Lighting (SSL)

FEATURES:

- High voltage capability ($V_{DS}=600V$)
- Low gate charge ($Q_{gs}=4.45nC$ TYP)
- Ultra low $r_{DS(ON)}$ (0.3Ω TYP)

MAXIMUM RATINGS: ($T_C=25^\circ C$ unless otherwise noted)

	SYMBOL		UNITS
Drain-Source Voltage	V_{DS}	600	V
Gate-Source Voltage	V_{GS}	30	V
Continuous Drain Current (Steady State)	I_D	11	A
Maximum Pulsed Drain Current, $t_p=10\mu s$	I_{DM}	44	A
Continuous Source Current (Body Diode)	I_S	11	A
Maximum Pulsed Source Current (Body Diode)	I_{SM}	44	A
Single Pulse Avalanche Energy (Note 1)	E_{AS}	280	mJ
Power Dissipation	P_D	25	W
Operating and Storage Junction Temperature	T_J, T_{stg}	-55 to +150	$^\circ C$
Thermal Resistance	θ_{JC}	5.0	$^\circ C/W$
Thermal Resistance	θ_{JA}	120	$^\circ C/W$

Note 1: $L=30mH$, $I_{AS}=4.0A$, $V_{DD}=100V$, $R_G=25\Omega$, Initial $T_J=25^\circ C$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ C$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{GSSF}, I_{GSSR}	$V_{GS}=30V, V_{DS}=0$			100	nA
I_{DSS}	$V_{DS}=600V, V_{GS}=0$		0.047	1.0	μA
BV_{DSS}	$V_{GS}=0, I_D=250\mu A$	600			V
$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	2.0	3.09	4.0	V
V_{SD}	$V_{GS}=0, I_S=11A$		0.92	1.4	V
$r_{DS(ON)}$	$V_{GS}=10V, I_D=5.5A$		0.30	0.36	Ω
C_{rss}	$V_{DS}=100V, V_{GS}=0, f=1.0MHz$		2.76		pF
C_{iss}	$V_{DS}=100V, V_{GS}=0, f=1.0MHz$		763		pF
C_{oss}	$V_{DS}=100V, V_{GS}=0, f=1.0MHz$		52		pF

R4 (19-August 2015)

CDM22011-600LRFP

N-CHANNEL
LR POWER MOSFET
11 AMP, 600 VOLT




ELECTRICAL CHARACTERISTICS - Continued: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	TYP	UNITS
$Q_{g(\text{tot})}$	$V_{DS}=480\text{V}$, $V_{GS}=10\text{V}$, $I_D=11\text{A}$ (Note 2)	23.05	nC
Q_{gs}	$V_{DS}=480\text{V}$, $V_{GS}=10\text{V}$, $I_D=11\text{A}$ (Note 2)	4.45	nC
Q_{gd}	$V_{DS}=480\text{V}$, $V_{GS}=10\text{V}$, $I_D=11\text{A}$ (Note 2)	11.31	nC
$t_{d(\text{on})}$	$V_{DD}=300\text{V}$, $V_{GS}=10\text{V}$, $I_D=11\text{A}$, $R_G=25\Omega$ (Note 2)	11	ns
t_r	$V_{DD}=300\text{V}$, $V_{GS}=10\text{V}$, $I_D=11\text{A}$, $R_G=25\Omega$ (Note 2)	27	ns
$t_{d(\text{off})}$	$V_{DD}=300\text{V}$, $V_{GS}=10\text{V}$, $I_D=11\text{A}$, $R_G=25\Omega$ (Note 2)	37	ns
t_f	$V_{DD}=300\text{V}$, $V_{GS}=10\text{V}$, $I_D=11\text{A}$, $R_G=25\Omega$ (Note 2)	23	ns
t_{rr}	$V_{GS}=0$, $I_S=11\text{A}$, $di/dt=100\text{A}/\mu\text{s}$ (Note 2)	315	ns
Q_{rr}	$V_{GS}=0$, $I_S=11\text{A}$, $di/dt=100\text{A}/\mu\text{s}$ (Note 2)	4.0	μC

Note 2: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$


TO-220FP CASE - MECHANICAL OUTLINE

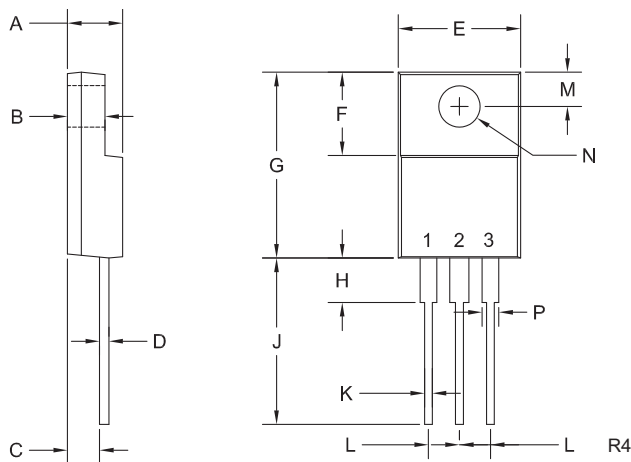

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.165	0.202	4.20	5.12
B	0.090	0.130	2.30	3.30
C	0.098	0.122	2.50	3.10
D	-	0.031	-	0.80
E	0.382	0.418	9.70	10.63
F	0.238	0.276	6.06	7.00
G	0.583	0.640	14.80	16.25
H	-	0.161	-	4.10
J	0.506	0.543	12.85	13.80
K	0.020	0.031	0.50	0.79
L	0.100		2.54	
M	0.120	0.140	3.05	3.55
N (DIA)	0.116	0.134	2.95	3.40
P	0.039	0.058	1.00	1.47

TO-220FP (REV: R4)

PIN CONFIGURATION



LEAD CODE:

- 1) Gate
- 2) Drain
- 3) Source

MARKING CODE: CDM11-600LR






R4 (19-August 2015)

CDM22011-600LRFP

N-CHANNEL
LR POWER MOSFET
11 AMP, 600 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

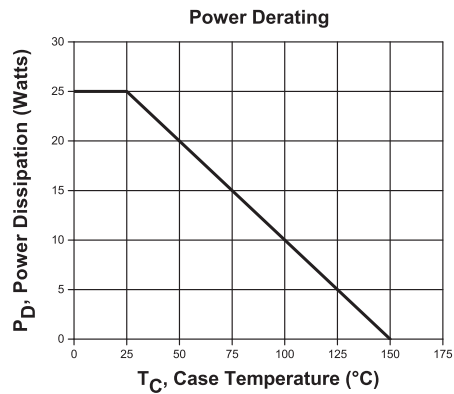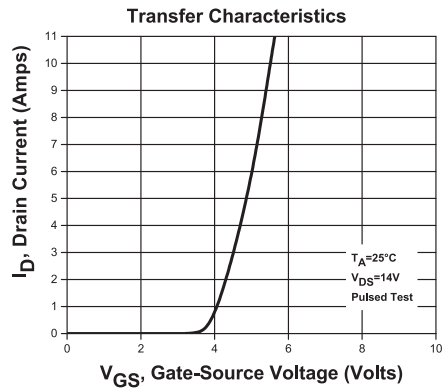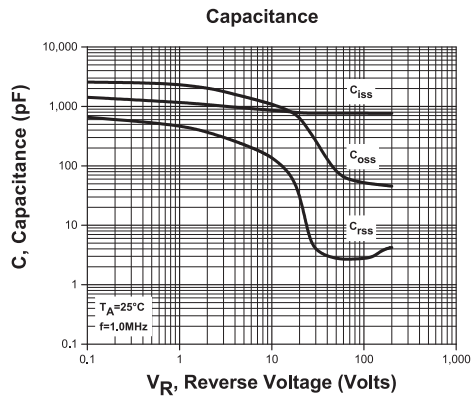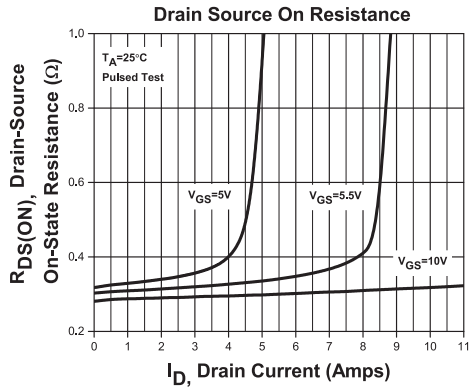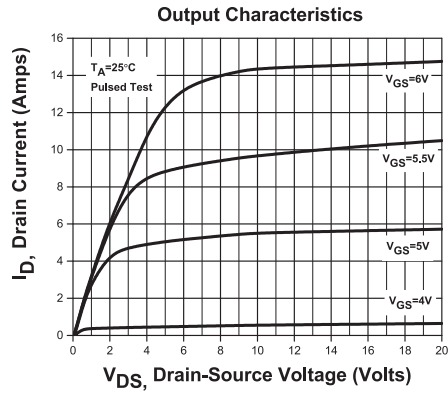

R4 (19-August 2015)