



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





COLOR DRIVER 36 WITH DMX CONTROL CAPABILITY



FEATURES / BENEFITS

- ▲ 3 fully addressable constant current outputs to separately control and drive red, blue and green LED circuits, making infinite combinations of colors possible
- ▲ Drives up to 12 LEDs per channel, 36 total
- ▲ Digital dimming level from 0% to 100%
- ▲ On board DMX compliant control interface
- ▲ Dip switch programmable for DMX channel or standard color-changing program
- ▲ Short and open circuit protected
- ▲ Remote mountable up to 30 meters (95')
- ▲ Available Color Kinetics pass through license, consult factory for details

OPERATING CONDITIONS

- ▲ Operating Ambient temperature -10°C to +40°C (14°F to 104°F)
- ▲ Maximum case temperature 65°C (149°F)
- ▲ Input voltage 110-240 VAC / 50-60 Hz
- ▲ Power consumption, 6-54W
- ▲ Power factor = 0.95
- ▲ Output current = 350mA at 100%
- ▲ Dimming control = DMX512 or pre-programmed color changing sequence
- ▲ 505 addresses possible per system
- ▲ V_{out} : 4.8 - 48 VDC

MECHANICAL DIMENSIONS

310mm X 55mm X 45mm
(12.20" x 2.17" x 1.77")
2 Mounting slots for M3 screws

APPLICATION

- ▲ Appropriate driver for any Dialight-Lumidrives color engine or RGB LinkLED system.
- ▲ Dynamic RGB color mixing
- ▲ Decorative lighting
- ▲ Entertainment lighting
- ▲ Theme lighting

CONTROL/INTERFACE

- ▲ DMX input via RJ45 connector
- ▲ Dip switch programmable for DMX channel or standard color-changing program
- ▲ For standard color changing sequence, set dip switches to channel 511

PART NUMBER

CDU-L-3-35-DMX

Dialight reserves the right to make changes at any time in order to supply the best product possible.

Dialight Corporation
1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com





MDEXLUMCD36DMX_C

WIRING INFORMATION

Colordriver 36 Associated Cables

CT4-MLXM	4-way Conn to 8-way Molex male	
CT4-MLXF	4-way Conn to 8-way Molex female	
CT4-100	4-way link lead 100mm	
CT4-200	4-way link lead 200mm	
CT4-C	4-way common connector	
CDL-M3M	8-way Molex - male to male	
CDL-M3E	8-way Molex - male to wire end	

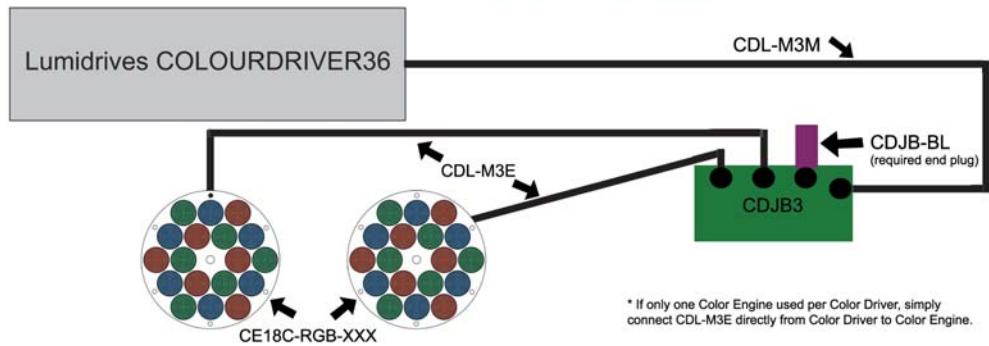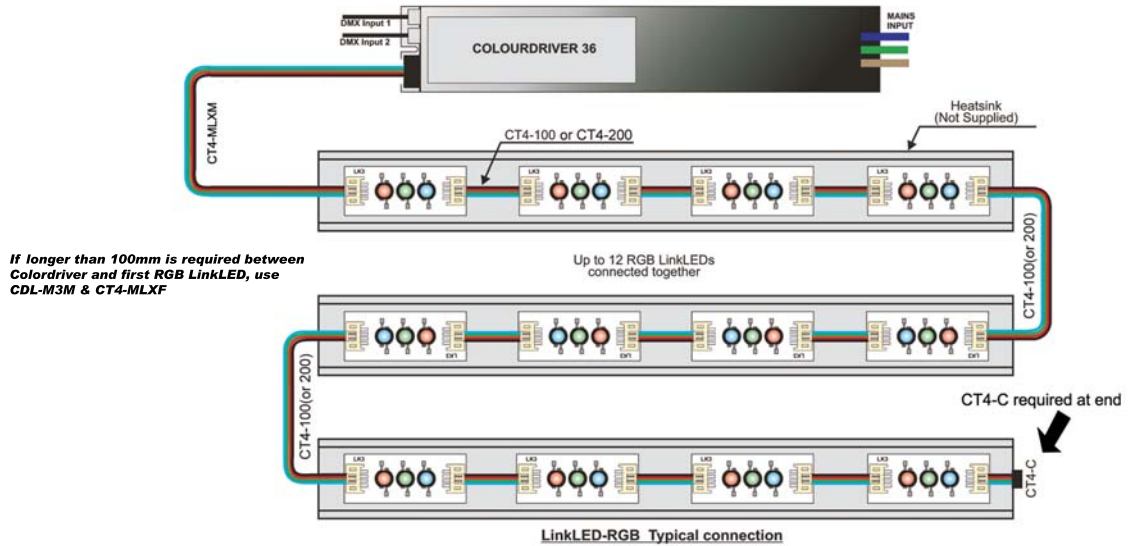

* If only one Color Engine used per Color Driver, simply connect CDL-M3E directly from Color Driver to Color Engine.

CDL-M3E is equipped with 8 individual colored wires. Each wire to be soldered onto indicated solder pad on color engine. For CE3C-RGB, cut off brown and purple leads.

Dialight reserves the right to make changes at any time in order to supply the best product possible.

Dialight Corporation
1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com