



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

- Extended pass band
- Low loss
- High rejection


Description

Surface mount, silver (Ag) coated ceramic duplexer. Developed for use in GSM Infrastructure applications.

Weight: Approximately 20.0 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a shield made of nickel silver plated steel.

Filter complies with RoHS standards.

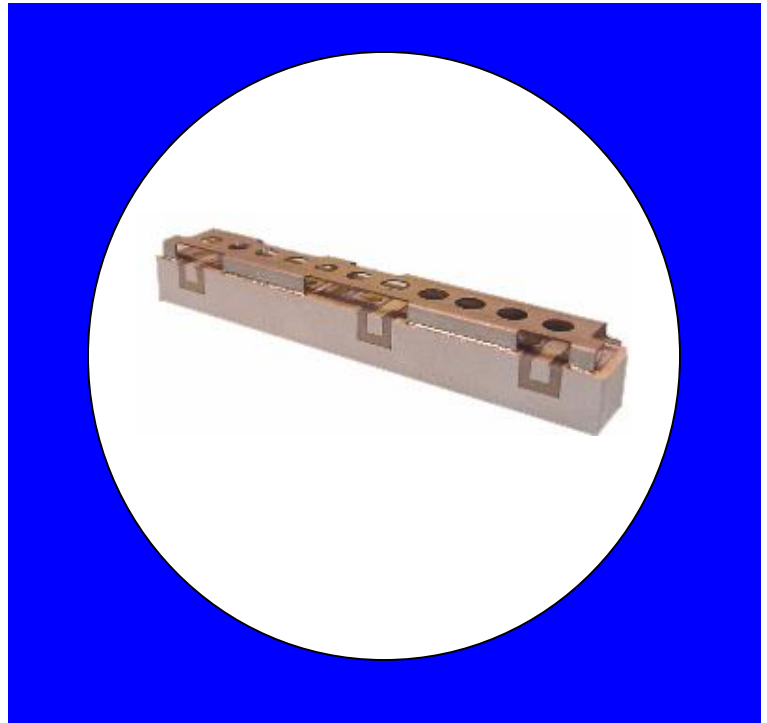

Electrical Specifications

Parameter	Frequency MHz	Typical @ 25°C	Specification @ 25°C	Spec over 40°C to +85°C
Low Band Response (S21)				
Passband Iloss	824 - 849	-1.70	-1.90	-2.10
Passband Ripple	824 - 849	0.50	0.90	1.00
Passband Return Loss @ Port 2	824 - 849	-12.50	-10.00	-10.00
Passband Return Loss @ Ant	824 - 849	-12.50	-10.00	-10.00
Attenuation	869 - 894	-58.00	-55.00	-55.00
High Band Response (S13)				
Passband Iloss	869 - 894	-1.70	-1.90	-2.10
Passband Ripple	869 - 894	0.40	0.90	1.00
Passband Return Loss @ Port 3	869 - 894	-12.50	-10.00	-10.00
Passband Return Loss @ Ant	869 - 894	-12.50	-10.00	-10.00
Attenuation	824 - 849	-57.00	-55.00	-55.00
Isolation (S23)				
Rejection @ Low Band	824 - 849	-58.00	-55.00	-55.00
Rejection @ Crossover	859	-42.50	-40.00	-40.00
Rejection @ High Band	869 - 894	-58.00	-55.00	-55.00
Power into any port		6 Watt max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:





Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;US 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429.Other US and foreign patents pending.

CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product.


Mechanical Drawing

Revision B – Origin Date: October 19, 2007 – Revision Date: July 28, 2011

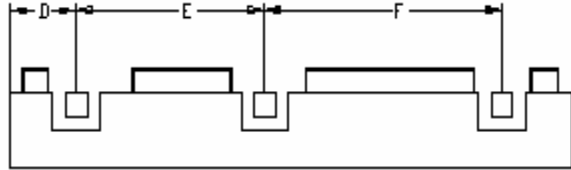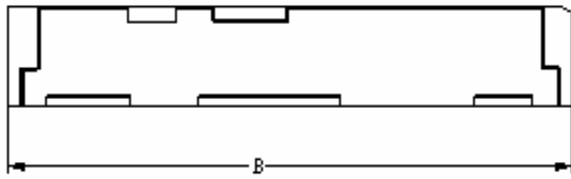


Dim	Nominal (mm)	Tolerance (mm) +/- or max
A		
B	42.0	max
C		
D	4.6	0.25
E	14.1	0.13
F	18.4	0.13
G	2.01	0.13
H	1.00	0.13
I	1.00	0.13
J	2.05	0.13
K	14.15	max
L	12.5	Max
M	8.0	max
N	1.65	0.13

PCB Layout

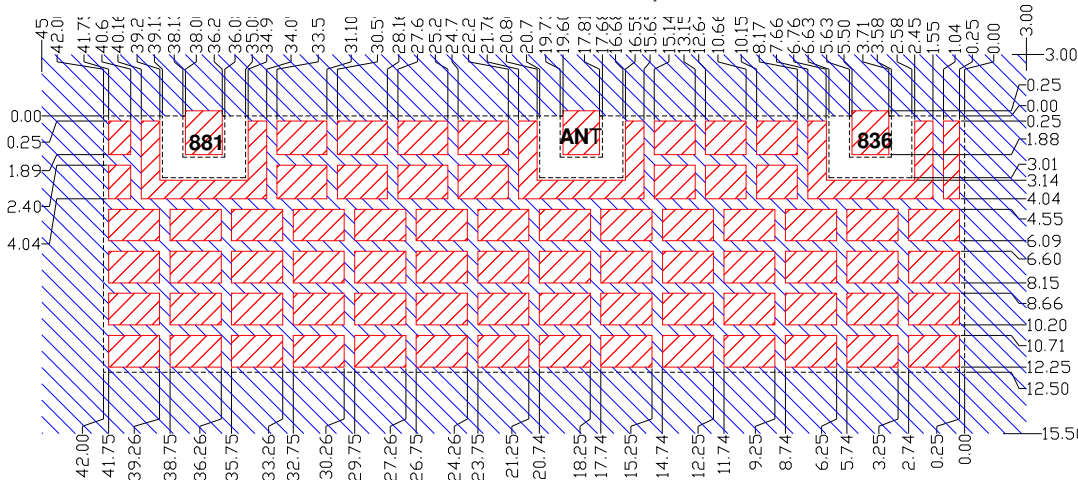


- Filter Outline
- Exposed Conductor
- Solder Resist Over Dielectric
- Solder Resist Over Conductor

Packaging and Marking

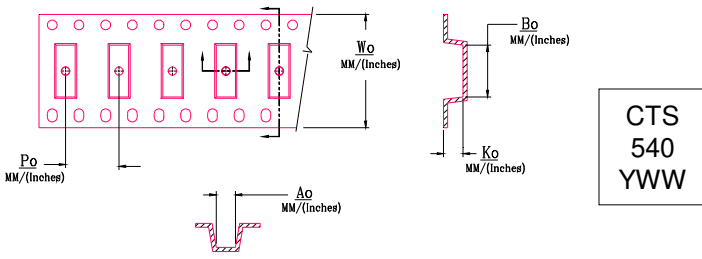

Wo	Ao	Bo	Ko	Po
Inches/mm	Inches/mm	Inches/mm	Inches/mm	Inches/mm
2.205"/56.0	0.569"/14.45	1.665"/42.3	0.315"/8.0	0.787"/20.0

DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	1.6
REEL QUANTITY	ea.	250



Electrical response

