



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Smart Technology. Delivered.

CFS60383P

600- 960 MHz/1350- 1550 MHz/1690- 2700 MHz/3300- 3800 MHz
Low Profile / Low PIM Ceiling Mount Antenna



Patent Pending CFS60383P

MULTI-BAND LOW PIM CEILING MOUNTED OMNIDIRECTIONAL ANTENNA

The CFS60383P is a Low PIM indoor wideband omnidirectional low profile ceiling mount antenna. It is designed to provide pattern coverage that is optimized for indoor coverage requirements at 600-960 MHz, and 1690-3800 MHz for the GSM, DCS, UMTS, AWS-3, WCS and LTE/WiMAX frequency bands. The CFS60383P is applicable for environments where aesthetics and wide angle coverage are necessary for successful wireless deployment. The surprisingly small size and extreme low profile enables maximum mounting flexibility while maintaining desired in-building aesthetics.

FEATURES

- Low profile aesthetically neutral housing
- Mounts directly and easily to ceiling tile
- Performance optimized using Laird proprietary RF optimization tools
- Supports AWS-3, WCS Frequency Bands

APPLICATIONS

- Small Cells
- Meeting Rooms
- Offices
- Hotels
- Museums
- iDAS
- Libraries
- Retail Malls
- Bus Terminals & Train Stations
- Other In-Building Areas

PARAMETER	SPECIFICATIONS											
Model	CFS60383P											
Frequency Bands, MHz	600-698	698-806	824-894	880-960	1350-1550	1690-1880	1850-1990	1910-2180	2300-2500	2500-2700	3300-3800	
Peak Gain, dBi (Avg)	2.9	3.3	3.5	4.6	4.1	3.9	3.8	4.6	5.8	6.8	4.1	
Peak Gain, dBi (Max)	3.5	3.6	3.6	5.4	5.2	4.4	4.1	5.3	6.3	7.1	4.4	
VSWR, Typ	<1.8:1	<1.5:1	<1.6:1	<1.6:1	<1.7:1	<1.8:1	<1.4:1	<1.4:1	<1.5:1	<1.4:1	<1.7:1	
VSWR, Max	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<2.0:1	
PIM, 3rd Order, 2x20 W (Typ)	<-156 dBc					<-157 dBc						
PIM, 3rd Order, 2x20 W (Max)	<-150 dBc					<-150 dBc						
Nominal Impedance	50Ω											
Polarization	Horizontal											
Azimuth 3 dB Beamwidth	360°											
Max Power (Ambient 25°C)	50 Watts											
Antenna Dimension (W x L x H)	117.2 x 180.3 x 7.6 mm (4.6" x 7.1" x 0.3")											
Weight (w/o mounting kit)	197 g/0.44 lbs (181 g/0.4 lbs)											
Antenna Color	White											
Radome	PC, UL94-V0 Material											
Operating Temperature	-30°C to +70°C											
Storage Temperature	-40°C to +85°C											
Material Substance Compliance	RoHS											

CONFIGURATION

PART NUMBER	CABLE LENGTH	CONNECTOR
CFS60383P-30NF	30 cm (12")	Type N- female
CFS60383P-30D43F	30 cm (12")	4.3-10 female

Americas: +1.847.839.6925
 IAS-AmericasSales@lairdtech.com

Europe: +44.1628.858941
 IAS-EUSales@lairdtech.com

Asia:
 IAS-AsiaSales@lairdtech.com

Middle East & Africa: +44.1628.858941
 IAS-MEASales@lairdtech.com

www.lairdtech.com



Smart Technology. Delivered.


CFS60383P

600- 960 MHz/1350- 1550 MHz/1690- 2700 MHz/3300- 3800 MHz


Low Profile / Low PIM Ceiling Mount Antenna

RADIATION PATTERNS


600 MHz

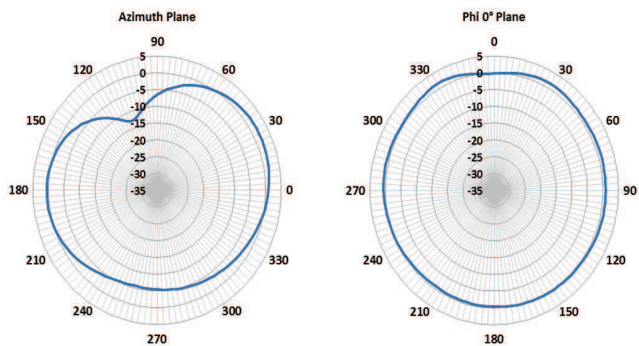


698 MHz

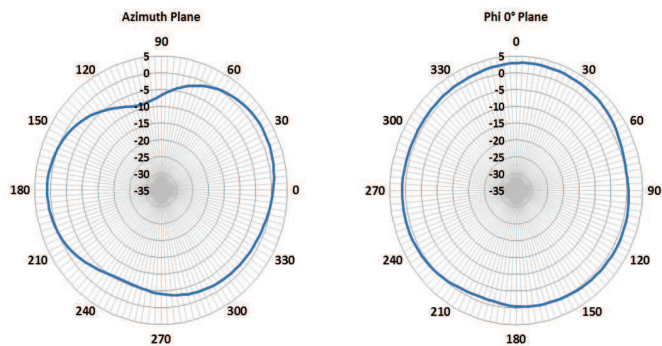


850 MHz

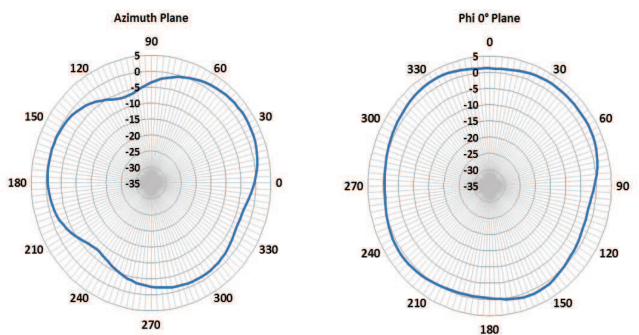


960 MHz

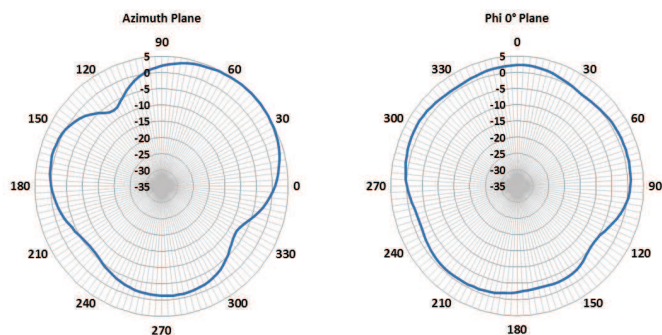

1350 MHz

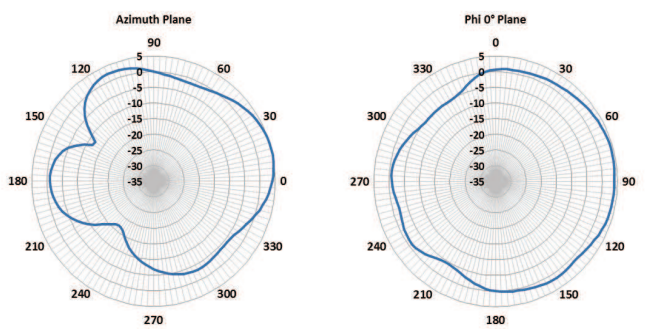

1690 MHz

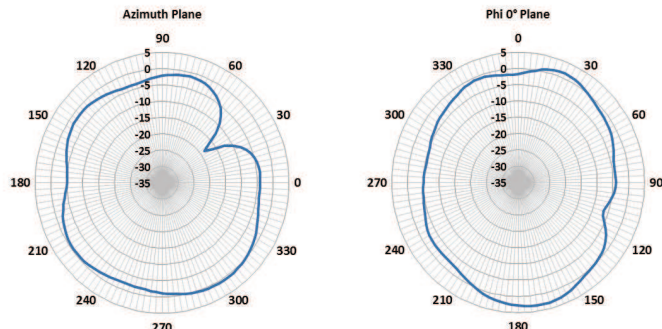



Smart Technology. Delivered.



CFS60383P

600- 960 MHz/1350- 1550 MHz/1690- 2700 MHz/3300- 3800 MHz



Low Profile / Low PIM Ceiling Mount Antenna

RADIATION PATTERNS



1850 MHz





1990 MHz





2170 MHz



2500 MHz



2700 MHz





Smart Technology. Delivered.


CFS60383P

600- 960 MHz/1350- 1550 MHz/1690- 2700 MHz/3300- 3800 MHz


Low Profile / Low PIM Ceiling Mount Antenna

RADIATION PATTERNS

3300 MHz

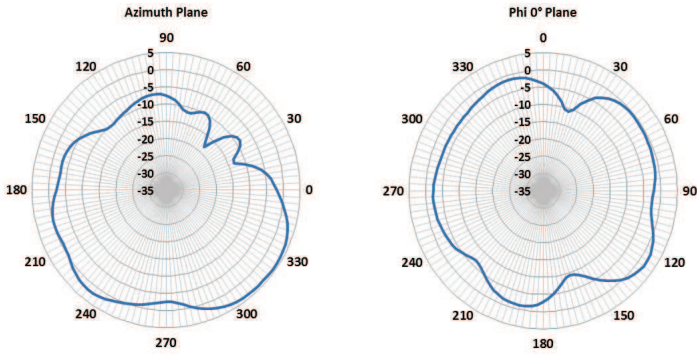

3800 MHz

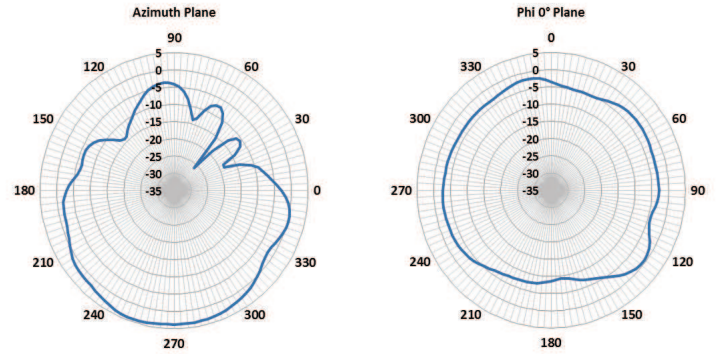

ANT-DS-CFS60383P 1216

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2016 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.