



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




OPTION



CloudGate



CONNECTING THINGS
to Each Other

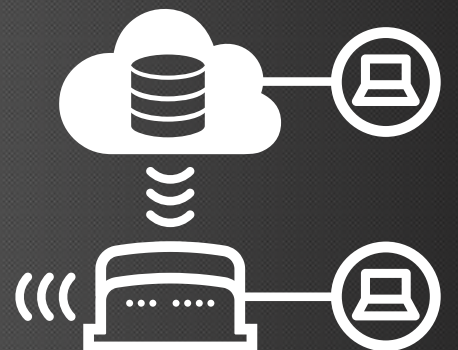

Secure

All of CloudGate's software and configuration images are protected with digital signatures and have dual rollback images that allow the product to revert to previous working settings if an issue is detected.

All management functions are protected by certificate and/or password based security mechanisms and all management actions take place over hardware assisted encrypted links.

Flexible and cost effective to integrate and deploy

CloudGate provides unique flexibility that allows customers and system integrators to tailor the product to their solution or even site specific requirements.

CloudGate incorporates two hardware expansion slots that allow the CloudGate to be enhanced with additional radio and/or wired interfaces. The expansion cards are simple and quick to install, allowing the field upgrade of the device when new functionality is required.

A range of accessory cards including wireless LAN Access Point and Client, RS-232 and RS-485, and a 4-port Ethernet switch are available from Option. All the design details of the expansion card can be licensed free of charge to partners allowing them to add value with their own hardware products.

CloudGate also allows simple integration and provisioning of customer or system integrator middleware and applications on the device. The automated cloud provisioning system means that each device can be set with its own custom configuration and image.

Summary

The Option CloudGate M2M Gateway has the basic, simple to use functionality for most applications along with the unique flexibility for meeting specific requirements that makes it the ideal choice for use with custom solutions.

As part of the continual product improvement process, OPTION reserves the right to alter the specifications of this product. © 2012 OPTION. Option and the Option logo are registered trademarks of OPTION. All third-party trademarks are the property of the respective owners. Option nv - Gaston Geenslaan 14 - 3001 Leuven Belgium
T +32 16 317 411 - F +32 16 207 164



www.option.com

Features	Sub Feature	Description
CPU		<ul style="list-style-type: none"> ARM926EJ-S @ 450MHz Memory available for customer applications 30 Mb R/O flash for executables 30 Mb R/W flash shared with system 40 Mb free RAM 1 Mb Configuration data Linux 2.6.35 Open WRT Stack
Ethernet (IEEE 802.3)		<ul style="list-style-type: none"> 10/100Mb/s RJ45 Connector
Expansion Slot 1 & 2		<ul style="list-style-type: none"> Expansion board for IO functions such as serial, USB, GPIO, WiFi
Power	DC Power in	<ul style="list-style-type: none"> 9-33 V DC
	Connector type	<ul style="list-style-type: none"> Micro-Fit 3.0™, Dual Row, 4 Circuits
Case	Dimensions (w x d x h)	<ul style="list-style-type: none"> 115 mm × 105 mm × 45 mm
	Weight	<ul style="list-style-type: none"> 180 g
	Mounting	<ul style="list-style-type: none"> 6 through holes for M4 bolts - 2 x 2 compatible with VESA Mount MIS-D 75 (Optional standard DIN rail mounting interface)
Enviromentals	Operating temperature	<ul style="list-style-type: none"> -30°C to 70°C
	Storage temperature	<ul style="list-style-type: none"> -40°C to +85°C
	Humidity operational	<ul style="list-style-type: none"> 5% - 95% non condensing
Standards compliance		<ul style="list-style-type: none"> ROHS, Reach FCC/CE

Industrial Serial Expansion Card



Serial Expansion Card



WiFi Expansion Card



4-Port Ethernet Expansion Card



CONNECTING THINGS to Each Other

