



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Rapid Charger

North American Region

[Download User Manual](#)



FAST



- Batteries ready for use in ~15 minutes (2300 mAh AA)

CONVENIENT




- Charge In Car
- Charge At Home

EFFICIENT



- Energy Star certified

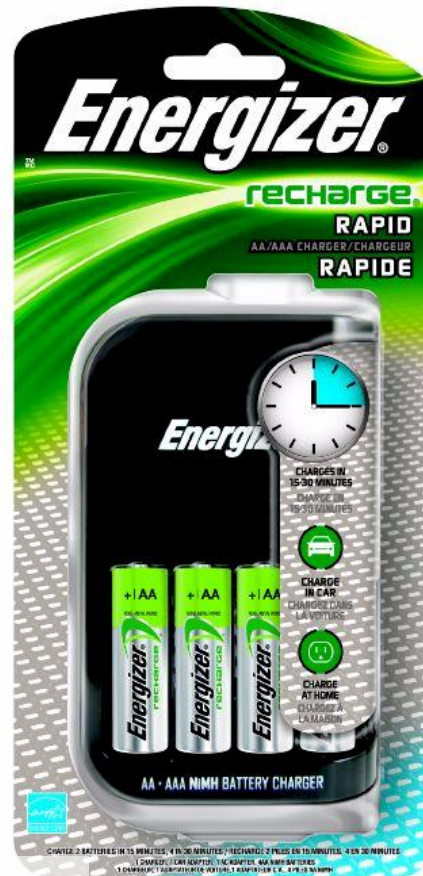

Before Using Your Charger:

Please read all instructions and cautionary markings on the battery charger, batteries, and device.

Best used with Energizer NiMH batteries.

Note: Batteries may become hot to the touch while charging.

Product Detail:

Designation: Rapid Charger

Color: Black

Charge Capability: "AA" (1) to (4) "AAA" (1) to (4)

Charging Time: (estimate)	Battery (NiMH)	Capacity (mAh)	Qty.	Estimated (time)
	AA	2450	(1-2)	16 Min
			(3-4)	32 Min
	AA	2300	(1-2)	15 Min
			(3-4)	30 Min
	AA	2000	(1-2)	13 Min
			(3-4)	26 Min
	AAA	850	(1-2)	15 Min
			(3-4)	30 Min
	AAA	1000	(1-2)	17 Min
			(3-4)	34 Min

Note: Batteries will not be damaged if left in charger for a longer time.

Trickle Charge: "AA" 50 mA, "AAA" 20 mA

Shutoff Mechanism: Delta V Detection
Temperature Detection
Timer Control

Charger Input: DC 11-16V

AC Adapter Input: 100-120vac 50/60Hz

Weight (charger): 180 grams (6.3 oz.)

Dimensions (mm): 36 x 120 x 80 (H x L x W)

Volume (cm³): 3456 (charger), 2588 (AC Adapter) 1792 (Car)

Rev Polarity Protection: Yes

Primary Battery Detection: Yes

LED Indication: Yes

Important Notice

This datasheet contains information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc.

Contents herein do not constitute a warranty.